

Evaluation Board for the **ADM2481** 2.5 kV Signal Isolated, 500 kbps, Half-Duplex RS-485 Transceiver

FEATURES

Half-duplex, isolated RS-485 transceiver
Suitable for 5 V or 3.3 V operation on V_{DD1}
Suitable for 5V operation on V_{DD2}
500 kbps data rate
256 nodes on bus

ADM2484E APPLICATIONS

Low power RS-485/RS-422 networks
Isolated interfaces
Building control networks
Multipoint data transmission systems

EVALUATION KIT CONTENTS

EVAL-ADM2481EBZ

GENERAL DESCRIPTION

The **EVAL-ADM2481EBZ** allows the isolated **ADM2481** RS-485 transceivers to be easily and quickly evaluated. The evaluation board allows all of the input and output functions to be exercised without the need for external components.

The **ADM2481** differential bus transceiver is an integrated, galvanically isolated component designed for bidirectional data communication on multipoint bus transmission lines.

The device employs Analog Devices, Inc., iCoupler® technology to combine a 3-channel isolator, a three-state differential line driver, and a differential input receiver into a single package. The logic side of the device is powered with either a 5 V or a 3.3 V supply, and the bus side uses an isolated 5 V supply.

The **ADM2481** is slew-limited to reduce reflections with improperly terminated transmission lines. The controlled slew rate limits the data rate to 500 kbps. The input impedance of the device is 96 kΩ, allowing up to 256 transceivers on the bus. Its driver has an active high enable feature. The driver differential outputs and receiver differential inputs are connected internally to form a differential I/O port. When the driver is disabled or when V_{DD1} or V_{DD2} = 0 V, this imposes minimal loading on the bus. An active-high receiver disable feature, which causes the receiver output to enter a high impedance state, is provided as well.

EVALUATION BOARD DIGITAL PHOTOGRAPH



Figure 1. **ADM2481** Evaluation Board

TABLE OF CONTENTS

Features	1	Evaluation Board Configurations	3
ADM2484E Applications.....	1	Setting Up the Evaluation Board.....	3
Evaluation Kit Contents.....	1	Evaluation Board Schematic and Artwork.....	4
General Description	1	Ordering Information.....	5
Evaluation Board Digital Photograph.....	1	Bill of Materials.....	7
Revision History	2	Related Links.....	7

REVISION HISTORY

10/11—Revision 0: Initial Version

EVALUATION BOARD CONFIGURATIONS

SETTING UP THE EVALUATION BOARD

The [EVAL-ADM2481EBZ](#) allows the isolated [ADM2481](#) RS-485 transceivers to be easily and quickly evaluated. The evaluation board allows all of the input and output functions to be exercised without the need for external components.

A termination resistor, R1, is fitted on the receiver inputs; this can be changed or removed if necessary. The value of the termination resistor should be equal to the characteristic impedance of the cable used, 120 Ω is the standard termination resistor value. Remove R1 if the board is connected to a bus that is already terminated at both ends.

The logic side is suitable for 5 V or 3.3 V operation on VDD1. There is a 10 nF decoupling capacitor, C1, and a 100 nF decoupling

capacitor, C2, fitted between VDD1 and GND1. The bus side is suitable for 5 V operation on VDD2. There is a 100 nF decoupling capacitor, C3, and a 10 nF decoupling capacitor, C4, fitted between VDD2 and GND2.

Refer to the [AN-960 Application Note](#), *RS-485/RS-422 Circuit Implementation Guide*, for an explanation of bus termination and fail-safe biasing.

Table 1. Board Configurations and Jumper Settings

Configuration	Jumpers Fitted	Jumpers Open
$\overline{\text{RE}}$ High	LK2 (Position A)	LK3, LK2 (Position B and C)
$\overline{\text{RE}}$ Low	LK2 (Position B)	LK3, LK2 (Position A and C)
Using the Screw Terminal for $\overline{\text{RE}}$	LK2 (Position C)	LK3, LK2 (Position A and B)
DE High	LK1 (Position A)	LK3, LK1 (Position B and C)
DE Low	LK1 (Position B)	LK3, LK1 (Position A and C)
Using the Screw Terminal for DE	LK1 (Position C)	LK3, LK1 (Position A and B)
Tie $\overline{\text{RE}}$ to DE, Only One Other Jumper Can Be Used	LK3 and LK1/LK2	

EVALUATION BOARD SCHEMATIC AND ARTWORK



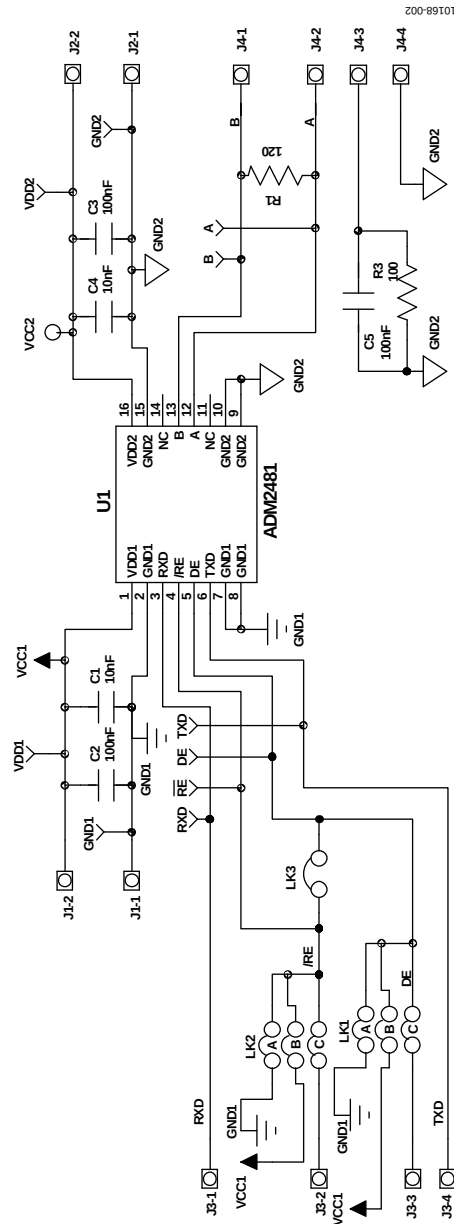


Figure 2. EVAL-ADM2481EBZ Schematic

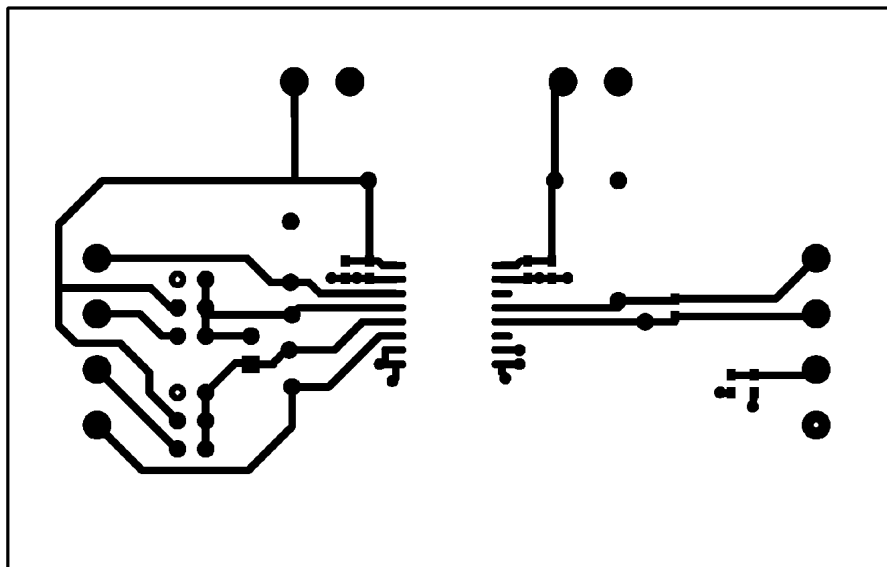

1016B-003

Figure 3. EVAL-ADM2481EBZ Silkscreen

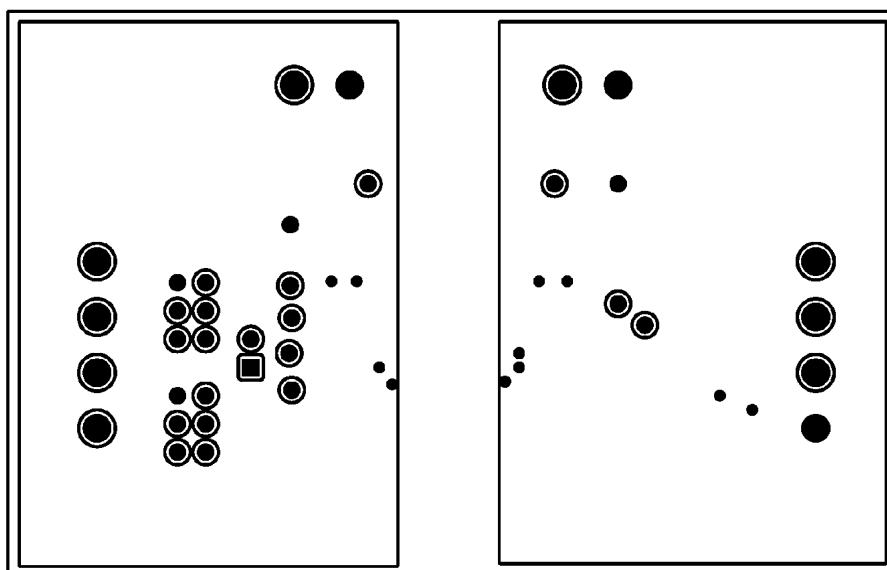

1016B-004

Figure 4. EVAL-ADM2481EBZ Solder Side

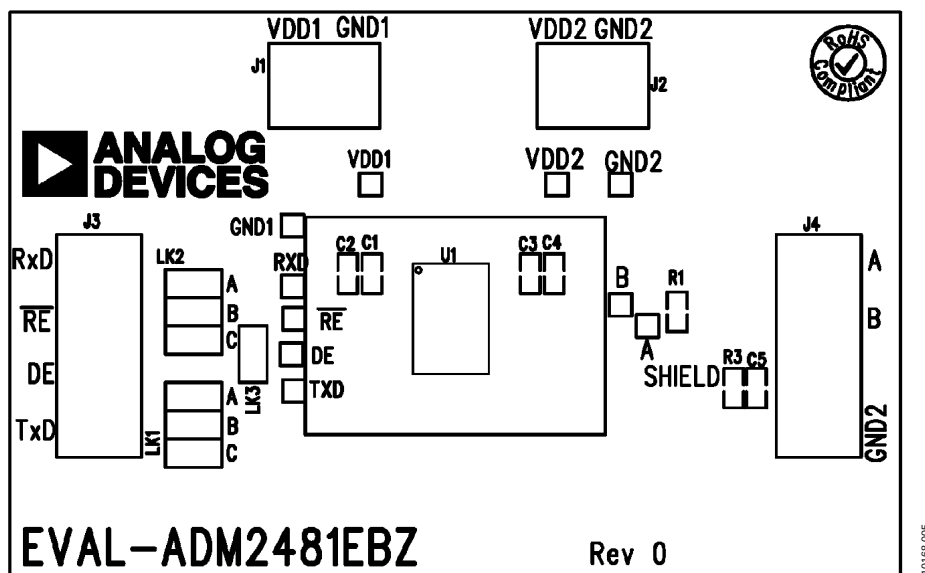


Figure 5. EVAL-ADM2481EBZ

ORDERING INFORMATION

BILL OF MATERIALS

Table 2.

Quantity	Reference Designator	Description	Supplier/Part Number
1	R1	Resistor, 120 Ω , 0603	VISHAY DALE/CRCW0603100RJNEA
1	R3	Resistor, 100 Ω , 0603	VISHAY DALE/CRCW0603100RJNEA
2	C1, C4	Capacitor, Size 0603, 10 nF	AVX Corp./06031C103K4Z2A
2	C2, C3, C5	Capacitor, Size 0603, 100 nF	AVX Corp./06033G104ZAT2A
2	J1, J2	CON\POWER, 2-pin terminal block (5 mm pitch)	Lumberg/KRM 02
2	J3, J4	CON\POWER4, 4-pin terminal block	Lumberg/KRM 04
2	LK1, LK2	Board-to-board connector header, 3-way, 2-row and Jumper x2	SPC Technology/SPC20499 HARWIN/M7566-05
1	U3	16-lead SOIC, wide body	Analog Devices/ ADM2481BRWZ
2	GND1, GND2	Test point, black	Vero Technologies/20-2137
2	VDD1, VDD2	Test point, red	Vero Technologies/20-313137
2	A, B	Test point, green	Vero Technologies/20-313138
4	RXD, DE, $\overline{\text{RE}}$, TXD	Test point, yellow	Vero Technologies/20-313140

RELATED LINKS

Resource	Description
ADM2481	2.5 kV Signal Isolated, 500 kbps, Half Duplex RS-485 Transceiver

NOTES

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. **CONFIDENTIALITY.** This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. **ADDITIONAL RESTRICTIONS.** Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. **TERMINATION.** ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. **LIMITATION OF LIABILITY.** THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). **EXPORT.** Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. **GOVERNING LAW.** This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.