
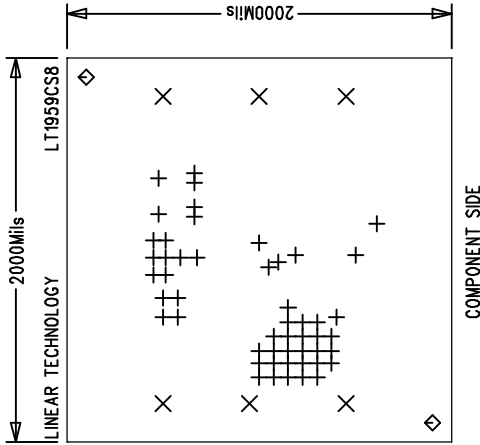


REVISIONS		
REV	DESCRIPTION	DATE


NOTES : Unless Otherwise Specified

1. MATERIAL : FR4 OR EQUIVALENT EPOXY, 2 OZ. COPPER CLAD
THICKNESS .062 +/- .006 TOTAL OF 2 LAYERS
2. FINISH : ALL PLATED HOLES .001 MIN. / .0015 MAX. COPPER PLATE
ELECTRODEPOSITED TIN-LEAD COMPOSITION
BEFORE REFLOW , SOLDER MASK OVER BARE COPPER (SMOBC)
3. SOLDER MASK : BOTH SIDES USING SR1020 OR EQUIVALENT
4. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK
5. ALL DIMENSIONS ARE IN INCHES
6. SCORING:



SIZE	QTY	SYM	PLTD
25	51	+	PLTD
95	6	X	PLTD
72	2	◇	NPLTD

Fabrication Drawing

<div>APPROVALS</div>				1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900					
		INIT	DATE	<div>TITLE: 4.5A, 500kHz Step-Down Switching Regulator</div>					
	DRAWN								
	CHECK								
	DESIGN								
	ENGR								
				SIZE	A	DEMO	DC355A (LT1959CS8)	REV.	A
SCALE = NONE				DES- 230406				SHT 1 of 1	