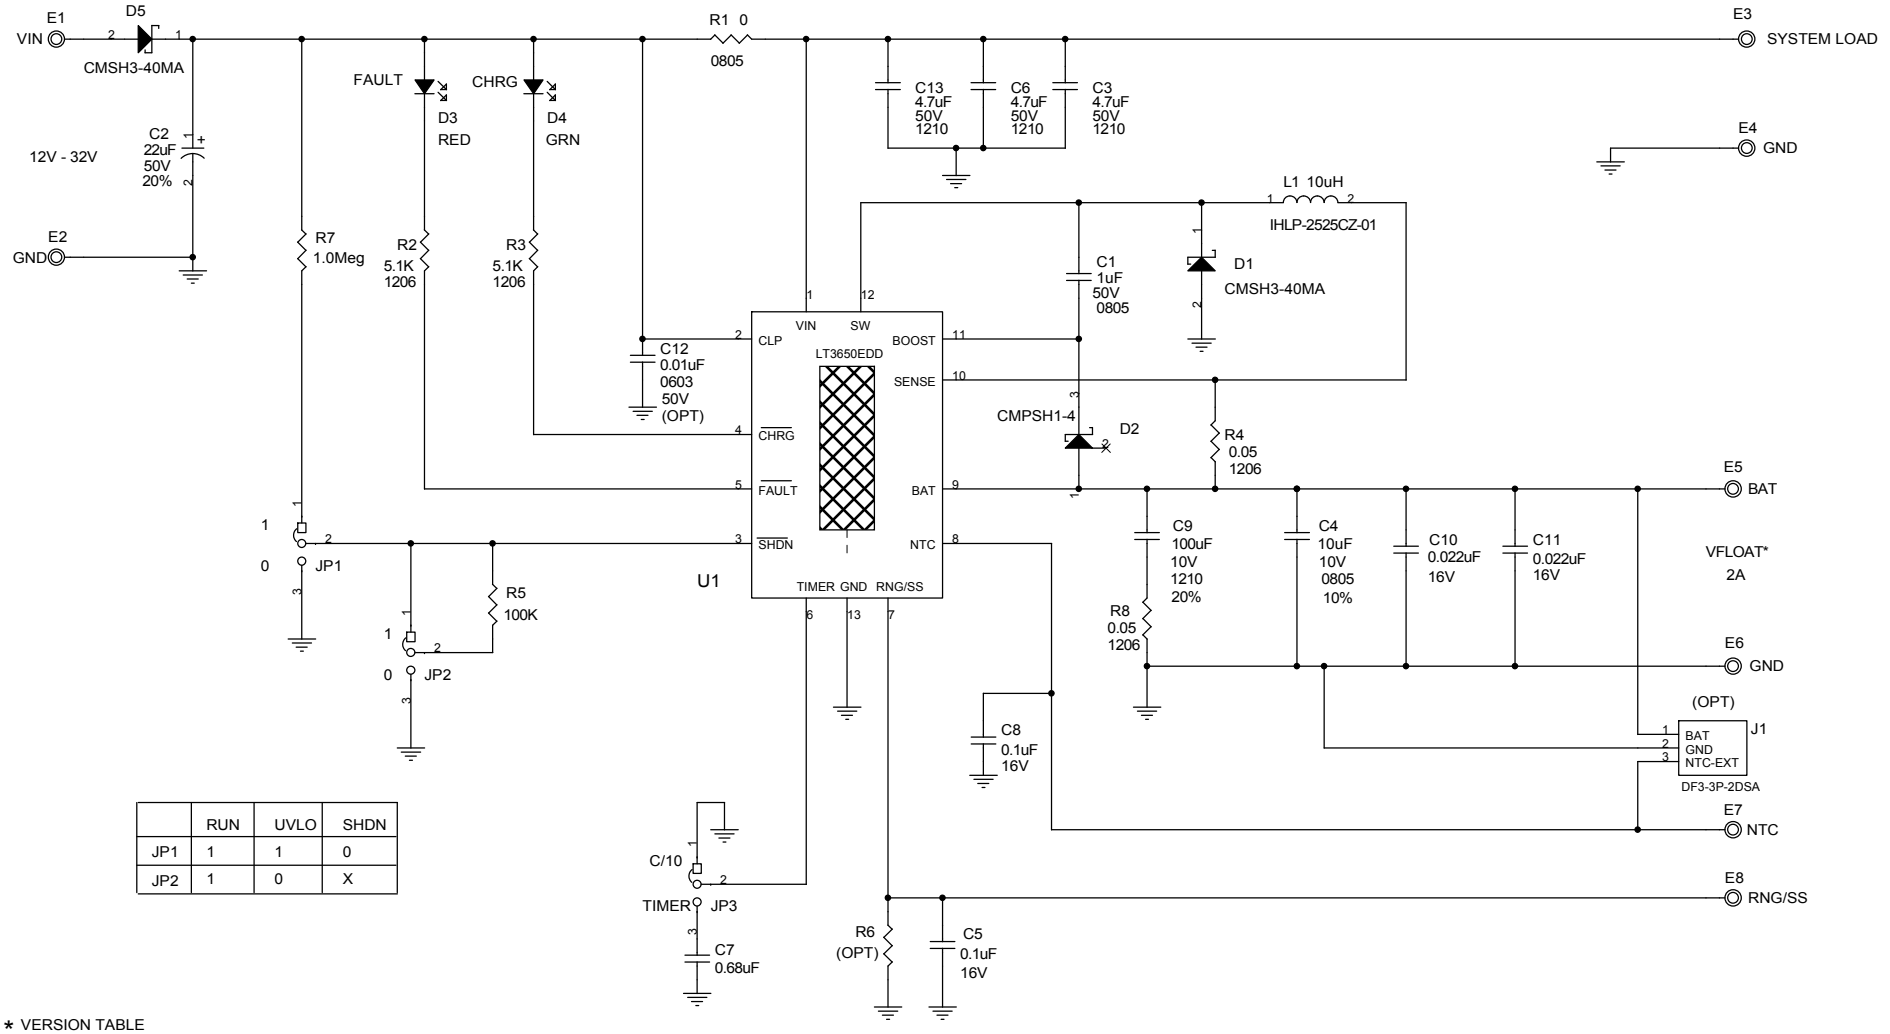

	RUN	UVLO	SHDN
JP1	1	1	0
JP2	1	0	X

* VERSION TABLE

Assembly Version	U1	VFLOAT*
DC1473A - A	LT3650EDD - 8.4	8.4V
DC1473A - B	LT3650EDD - 8.2	8.2V

Unless noted:
Resistors: Ohms
0402
1%
1/16W
Capacitors:
0402
10%
10V

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

CONTRACT NO.

APPROVALS	DATE
DRAWN J.Drew	8/25/08
CHECKED	
APPROVED	
ENGINEER J.Drew	8/25/08
DESIGNER	

Friday, January 30, 2009

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507

TITLE
LT3650EDD - 8.4, LT3650EDD - 8.2
2A Monolithic 2 Cell Li-Ion Battery Charger

SIZE	CAGE CODE	DWG NO	REV
A		DC1473A - A/B	A

SCALE: | FILENAME: | SHEET 1 OF 1