preliminary


# Schottky Diode Gen ²

$V_{RRM}$ = 60 V
$I_{FAV}$ = 2x 30 A
$V_F$ = 0.67 V


High Performance Schottky Diode
Low Loss and Soft Recovery
Common Cathode

**Part number**

DSB60C60HB




Backside: cathode

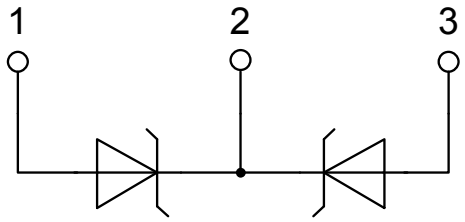


**Features / Advantages:**

- Very low Vf
- Extremely low switching losses
- Low Irm values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

**Applications:**

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

**Package:** TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0



© 2013 IXYS all rights reserved

preliminary

| Schottky | | | | Ratings | | | |
|---|---|---|---|---|---|---|---|
| Symbol | Definition | Conditions | | min. | typ. | max. | Unit |
| $V_{RSM}$ | *max. non-repetitive reverse blocking voltage* | | $T_{VJ}$ = 25°C | | | 60 | V |
| $V_{RRM}$ | *max. repetitive reverse blocking voltage* | | $T_{VJ}$ = 25°C | | | 60 | V |
| $I_R$ | *reverse current, drain current* | $V_R$ = 60 V | $T_{VJ}$ = 25°C | | | 10 | mA |
| | | $V_R$ = 60 V | $T_{VJ}$ = 100°C | | | 50 | mA |
| $V_F$ | *forward voltage drop* | $I_F$ = 30 A | $T_{VJ}$ = 25°C | | | 0.77 | V |
| | | $I_F$ = 60 A | | | | 1.18 | V |
| | | $I_F$ = 30 A | $T_{VJ}$ = 125°C | | | 0.67 | V |
| | | $I_F$ = 60 A | | | | 0.92 | V |
| $I_{FAV}$ | *average forward current* | $T_C$ = 125°C | $T_{VJ}$ = 150°C | | | 30 | A |
| | | rectangular d = 0.5 | | | | | |
| $V_{F0}$ | *threshold voltage* } *for power loss calculation only* | | $T_{VJ}$ = 150°C | | | 0.46 | V |
| $r_F$ | *slope resistance* } | | | | | 6.2 | mΩ |
| $R_{thJC}$ | *thermal resistance junction to case* | | | | | 0.95 | K/W |
| $R_{thCH}$ | *thermal resistance case to heatsink* | | | | 0.25 | | K/W |
| $P_{tot}$ | *total power dissipation* | | $T_C$ = 25°C | | | 130 | W |
| $I_{FSM}$ | *max. forward surge current* | t = 10 ms; (50 Hz), sine; $V_R$ = 0 V | $T_{VJ}$ = 45°C | | | 570 | A |
| $C_J$ | *junction capacitance* | $V_R$ = 12 V f = 1 MHz | $T_{VJ}$ = 25°C | | 449 | | pF |




© 2013 IXYS all rights reserved

preliminary

| Package TO-247 | | | Ratings | | | |
|---|---|---|---|---|---|---|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit |
| $I_{RMS}$ | *RMS current* | per terminal [1] | | | 50 | A |
| $T_{VJ}$ | *virtual junction temperature* | | -55 | | 150 | °C |
| $T_{op}$ | *operation temperature* | | -55 | | 125 | °C |
| $T_{stg}$ | *storage temperature* | | -55 | | 150 | °C |
| Weight | | | | 6 | | g |
| $M_D$ | *mounting torque* | | 0.8 | | 1.2 | Nm |
| $F_C$ | *mounting force with clip* | | 20 | | 120 | N |

Product Marking





**Part number**

D = Diode
S = Schottky Diode
B = ultra low VF
60 = Current Rating [A]
C = Common Cathode
60 = Reverse Voltage [V]
HB = TO-247AD (3)

| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|---|---|---|---|---|---|
| Standard | DSB60C60HB | DSB60C60HB | Tube | 30 | 502935 |

| Similar Part | Package | Voltage class |
|---|---|---|
| DSB60C60PB | TO-220AB (3) | 60 |

**Equivalent Circuits for Simulation** ** on die level* $T_{VJ}$ = 150 °C




Schottky


| | | | |
|---|---|---|---|
| $V_{0\,max}$ | *threshold voltage* | 0.46 | V |
| $R_{0\,max}$ | *slope resistance ** | 3.7 | mΩ |




© 2013 IXYS all rights reserved

preliminary

## Outlines TO-247

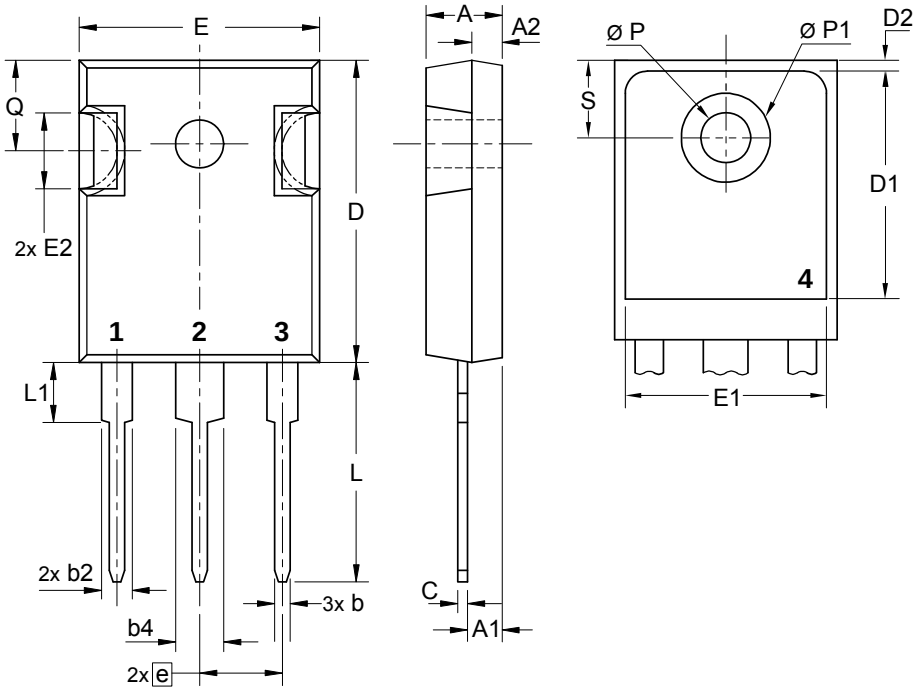


| Sym. | Inches | | Millimeter | |
|---|---|---|---|---|
| | min. | max. | min. | max. |
| A | 0.185 | 0.209 | 4.70 | 5.30 |
| A1 | 0.087 | 0.102 | 2.21 | 2.59 |
| A2 | 0.059 | 0.098 | 1.50 | 2.49 |
| D | 0.819 | 0.845 | 20.79 | 21.45 |
| E | 0.610 | 0.640 | 15.48 | 16.24 |
| E2 | 0.170 | 0.216 | 4.31 | 5.48 |
| e | 0.215 BSC | | 5.46 BSC | |
| L | 0.780 | 0.800 | 19.80 | 20.30 |
| L1 | - | 0.177 | - | 4.49 |
| Ø P | 0.140 | 0.144 | 3.55 | 3.65 |
| Q | 0.212 | 0.244 | 5.38 | 6.19 |
| S | 0.242 BSC | | 6.14 BSC | |
| b | 0.039 | 0.055 | 0.99 | 1.40 |
| b2 | 0.065 | 0.094 | 1.65 | 2.39 |
| b4 | 0.102 | 0.135 | 2.59 | 3.43 |
| c | 0.015 | 0.035 | 0.38 | 0.89 |
| D1 | 0.515 | - | 13.07 | - |
| D2 | 0.020 | 0.053 | 0.51 | 1.35 |
| E1 | 0.530 | - | 13.45 | - |
| Ø P1 | - | 0.29 | - | 7.39 |

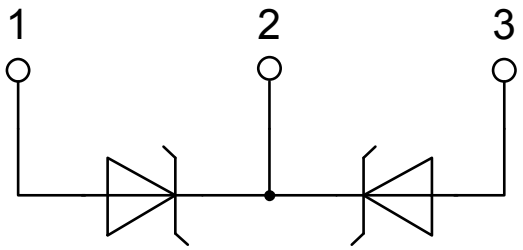




© 2013 IXYS all rights reserved