



REVISIONS			
REV	DESCRIPTION	APPR	DATE

### NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISHED ON OUTER LAYERS.  
1 OZ. COPPER FINISHED ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.  
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER. .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.  
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER


WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.

6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
8. SCORING:

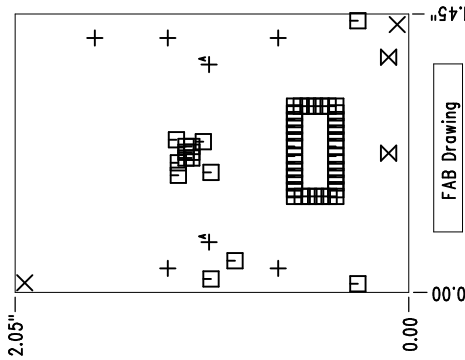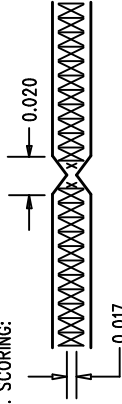

SIZE	QTY	SYM	PLTD
65	5	+	PLTD
70	2	X	NPLTD
10	53	□	PLTD
40	2	⊗	PLTD
86.61	2	A	NPLTD

### FAB DRAWING

<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 2 PLACE ±.01 3 PLACE ±.005 INTERPRET DIM AND TOL PER ASME Y14.5M – 1994</div>				APPROVALS					1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900		
				DRAWN		INIT		DATE			
				CHECK							
				DESIGN		JUNE WU		3/25/05			
				ENGR		Keith S.		3/25/05			
TITLE: LTC3214EDD, Low Noise, High Current LED Flash Charge Pump				SIZE A		DEMO		DC902A		REV. A	
SCALE = NONE				DES-230				SHT 1 of 1			