

REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.

2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 4 OZ. COPPER ON OUTER LAYER, 2 OZ. COPPER ON INNER LAYER, THICKNESS .062 +/- .006 TOTAL OF 6 LAYERS. FLAMABILITY RATING: 94 V-0 MINIMUM .



3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING. HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER

4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.


5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.

6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

7. SCORING:

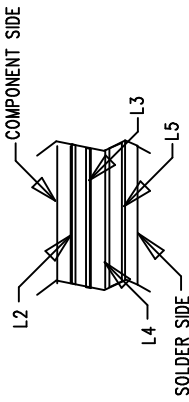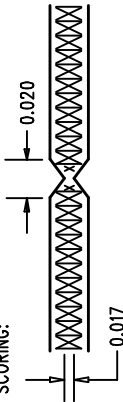


FAB DRAWING

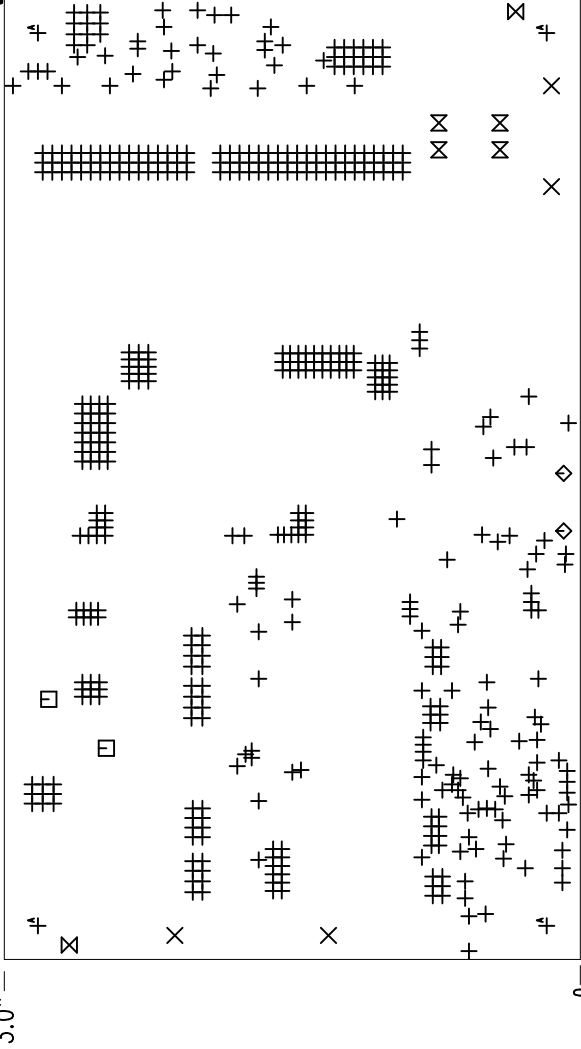

FAB Drawing

SIZE	QTY	SYM	PLTD
15	485	+	PLTD
94	4	X	PLTD
60	2	□	PLTD
40	2	◇	PLTD
70	2	⊗	NPLTD
45	4	⊠	PLTD
187	4	A	PLTD

APPROVALS		 LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	JUNE WU	9/13/02	TITLE:		
ENGR	KURK M.	9/13/02	LTC3722EGN-1, 36-72Vin to 12V/35A Isolated Supply		
			SIZE	DEMO	REV. A
			A	DC607A	
SCALE = NONE			DES-230578		SHT 1 of 1