


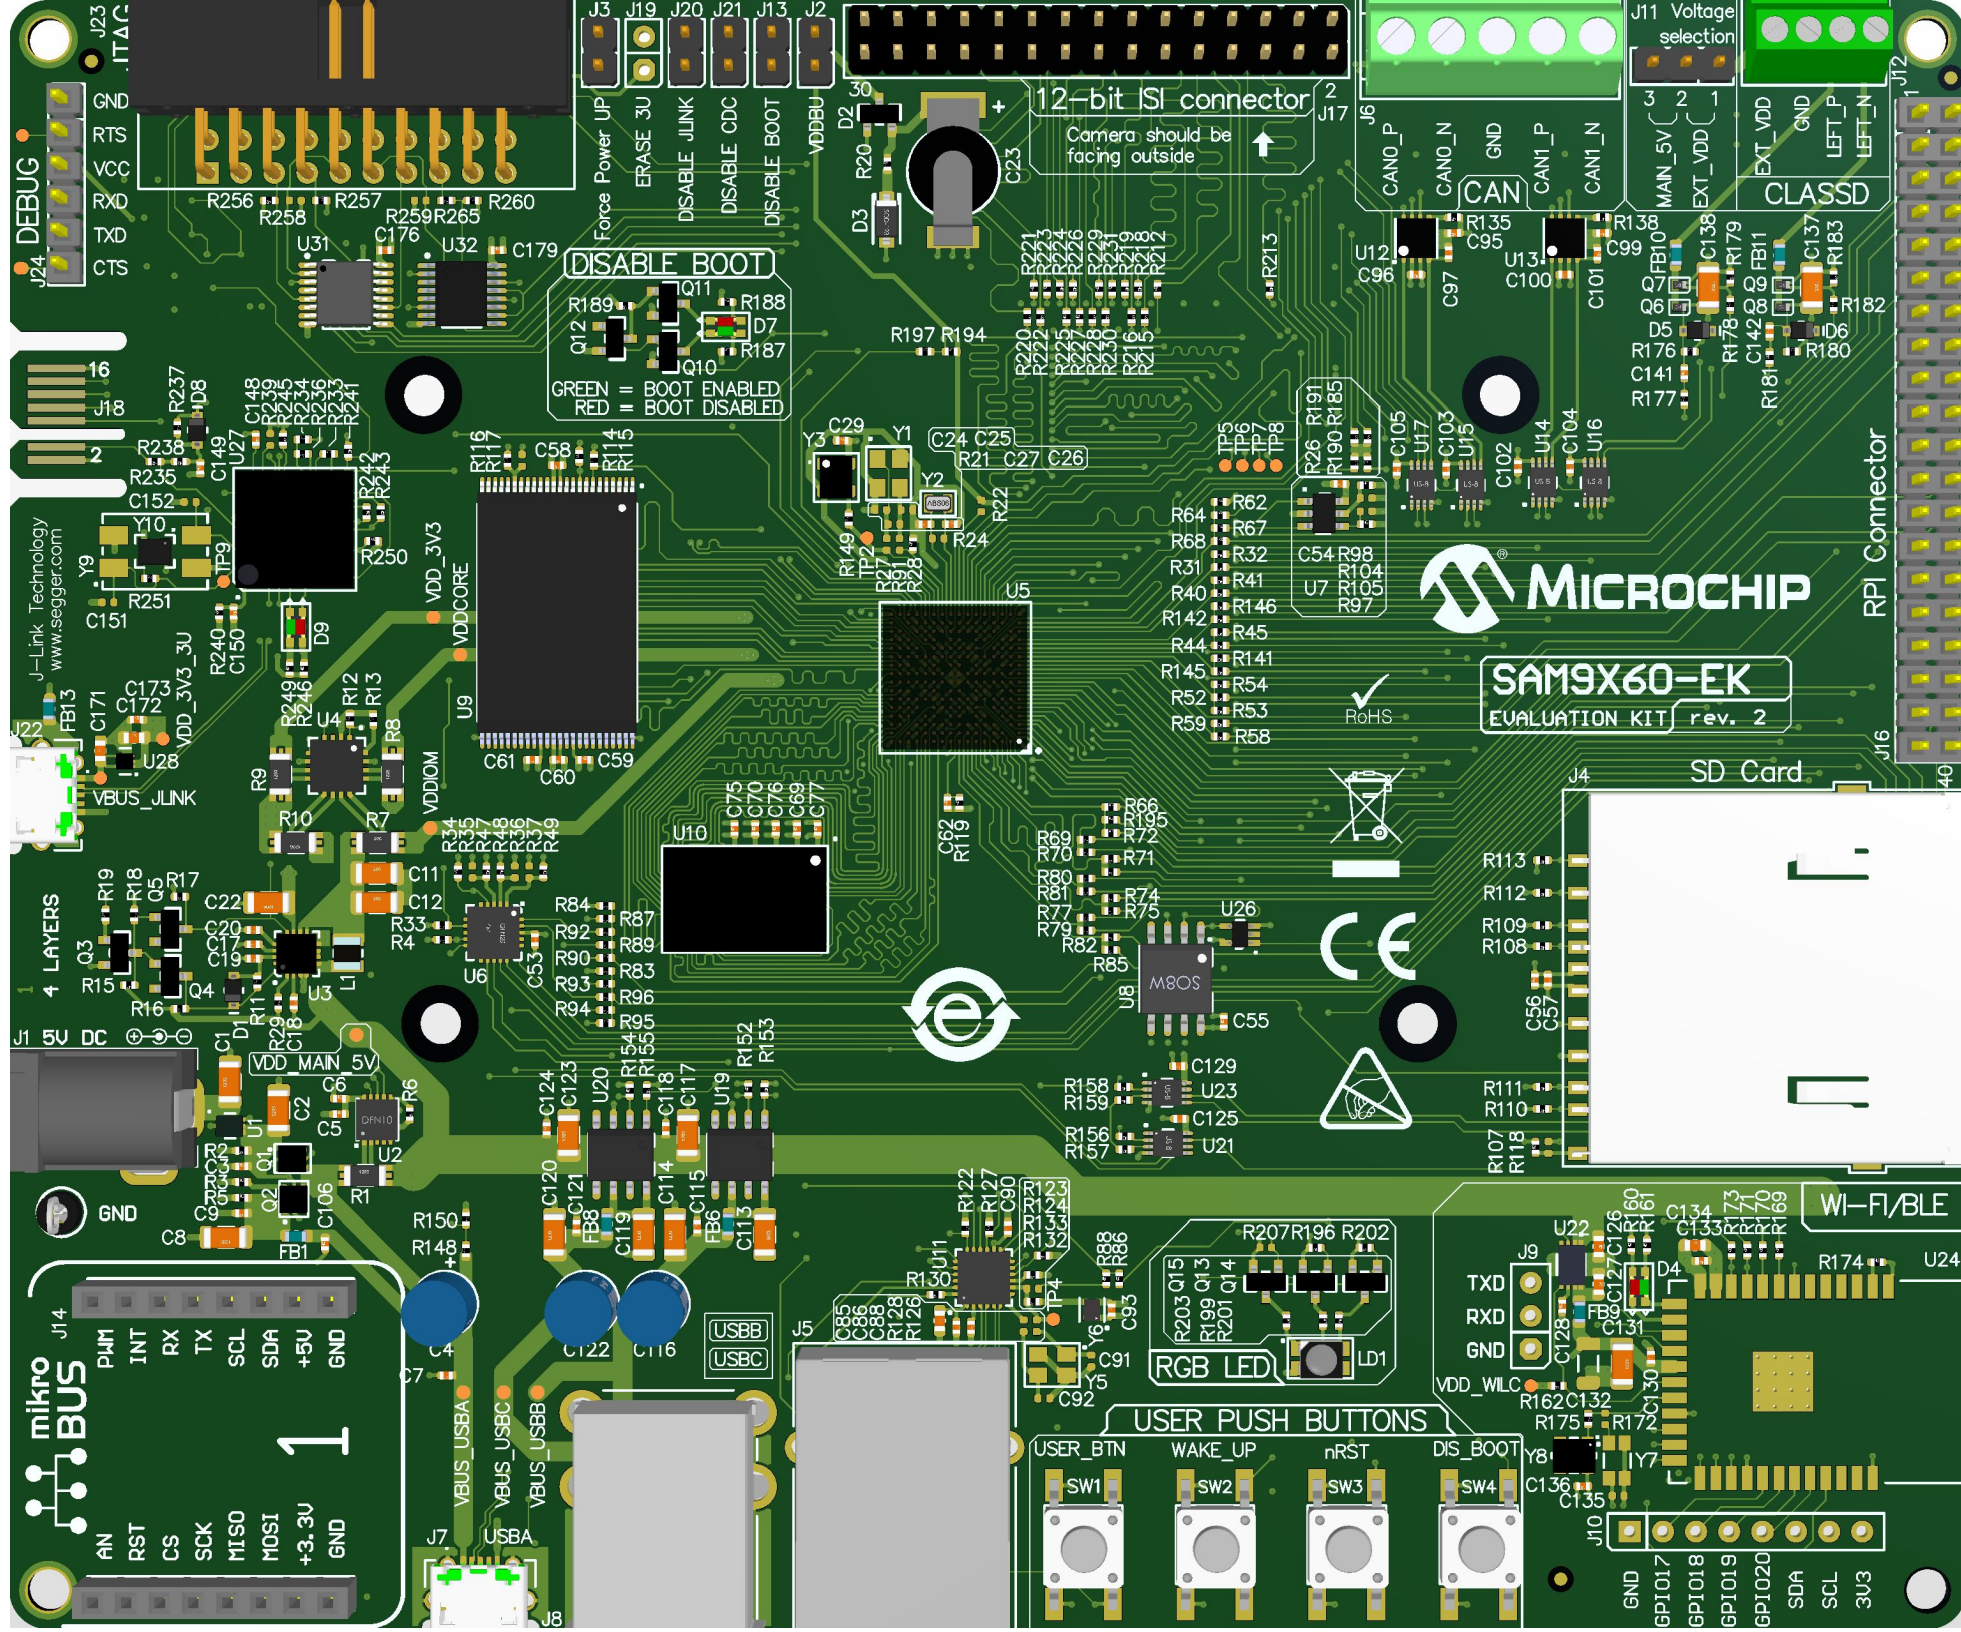

The LCD should be mounted on top of the board and the ribbon cable should cover the ISI connector
The LCD interface and the Image Sensor Interface are mutually exclusive
You can use either one or the other at one time

LABEL1

mikro
BUS

PH1 INT1 RX1 TX1 TCS VDS NS+ DNG

AN RST CS SCK MI50 MI50 ISO50 VCC+ DNG

C143

