
IXYS

TrenchMV™ Power MOSFET


IXTH200N10T
IXTQ200N10T

V_{DSS} = 100V
I_{D25} = 200A
$R_{DS(on)}$ ≤ 5.5mΩ


N-Channel Enhancement Mode
Avalanche Rated



TO-247 (IXTH)



TO-3P (IXTQ)



Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C	100	V
V_{DGR}	T_J = 25°C to 175°C, R_{GS} = 1MΩ	100	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	200	A
I_{LRMS}	Lead Current Limit, RMS	75	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	500	A
I_A	T_C = 25°C	40	A
E_{AS}	T_C = 25°C	1.5	J
P_D	T_C = 25°C	550	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-55 ... +175	°C
T_L	1.6mm (0.062in.) from case for 10s	300	°C
	Plastic body for 10 seconds	260	°C
M_d	Mounting torque	1.13 / 10	Nm/lb.in.
Weight	TO-247	6.0	g
	TO-3P	5.5	g

G = Gate D = Drain
S = Source TAB = Drain

Features

- International standard packages
- 175°C Operating Temperature
- Avalanche Rated
- Low $R_{DS(on)}$

Advantages

- Easy to mount
- Space savings
- High power density

Applications

- Automotive
  - Motor Drives
  - High Side Switch
  - 12V Battery
  - ABS Systems
- DC/DC Converters and Off-line UPS
- Primary - Side Switch
- High Current Switching Applications

Symbol	Test Conditions (T_J = 25°C unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 250μA	100			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 250μA	2.5		4.5	V
I_{GSS}	V_{GS} = ± 20V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$			5	μA
	V_{GS} = 0V T_J = 150°C			250	μA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 50A, Notes 1, 2		4.5	5.5	mΩ

© 2008 IXYS CORPORATION, All rights reserved


Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	60	96		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		9400		pF
C_{oss}			1087		pF
C_{rss}			140		pF
$t_{d(on)}$	**Resistive Switching Times**		35		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 50A		31		ns
$t_{d(off)}$	R_G = 3.3Ω (External)		45		ns
t_f			34		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 50A		152		nC
Q_{gs}			47		nC
Q_{gd}			47		nC
R_{thJC}				0.27	°C/W
R_{thCH}			0.25		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			200	A
I_{SM}	Repetitive, Pulse width limited by T_{JM}			500	A
V_{SD}	I_F = 50A, V_{GS} = 0V, Note 1			1.0	V
t_{rr}	I_F = 100A, V_{GS} = 0V,-di/dt = 100A/μs		76		ns
Q_{RM}	V_R = 50V		205		nC
I_{RM}			5.4		A

Notes: 1. Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.
2. On through-hole packages, $R_{DS(on)}$ Kelvin test contact location must be 5mm or less from the package body.


TO-247 (IXTH) Outline

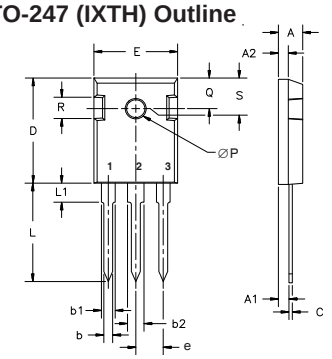

Terminals: 1 - Gate 2 - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
ØP	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216

TO-3P (IXTQ) Outline

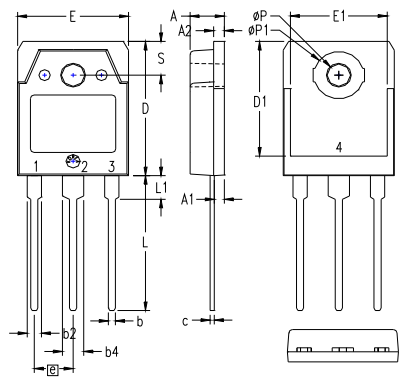

Pins: 1 - Gate 2 - Drain
3 - Source 4, TAB - Drain

SYM	INCHES MIN	MAX	MILLIMETERS MIN	MAX
A	.185	.193	4.70	4.90
A1	.051	.059	1.30	1.50
A2	.057	.065	1.45	1.65
b	.035	.045	0.90	1.15
b2	.075	.087	1.90	2.20
b4	.114	.126	2.90	3.20
c	.022	.031	0.55	0.80
D	.780	.791	19.80	20.10
D1	.665	.677	16.90	17.20
E	.610	.622	15.50	15.80
E1	.531	.539	13.50	13.70
e	.215 BSC		5.45 BSC	
L	.779	.795	19.80	20.20
L1	.134	.142	3.40	3.60
øP	.126	.134	3.20	3.40
øP1	.272	.280	6.90	7.10
S	.193	.201	4.90	5.10

All metal area are tin plated.

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ 25ºC

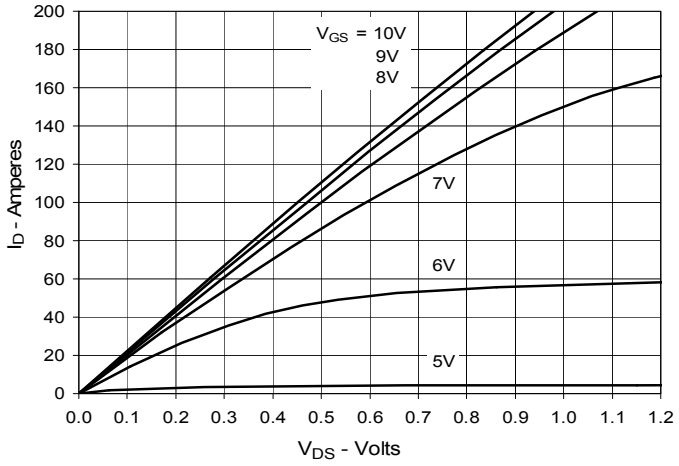


Fig. 2. Extended Output Characteristics @ 25ºC

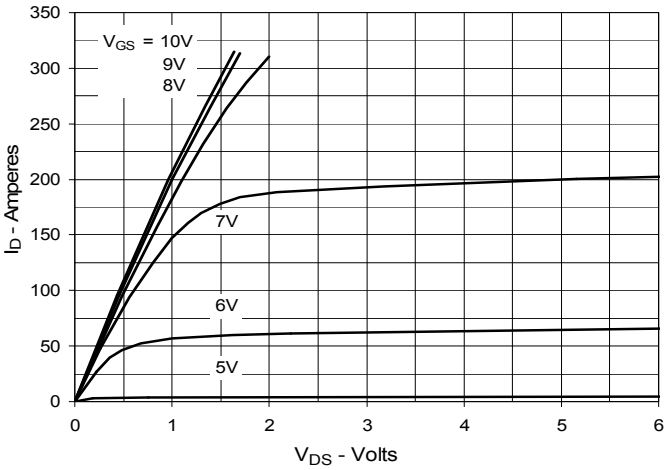


Fig. 3. Output Characteristics @ 150ºC

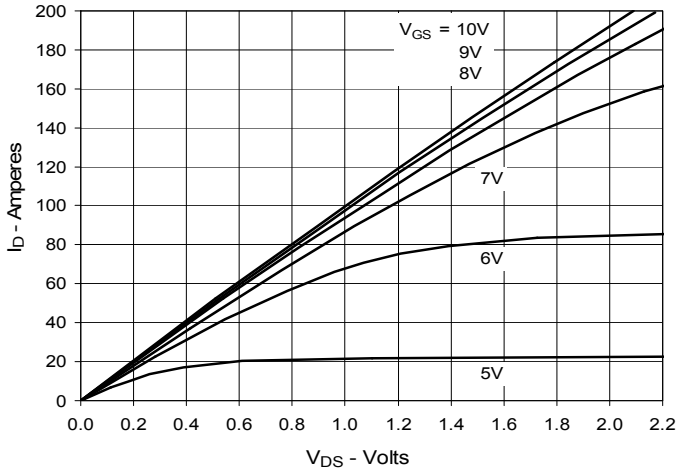


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 100A Value vs. Junction Temperature

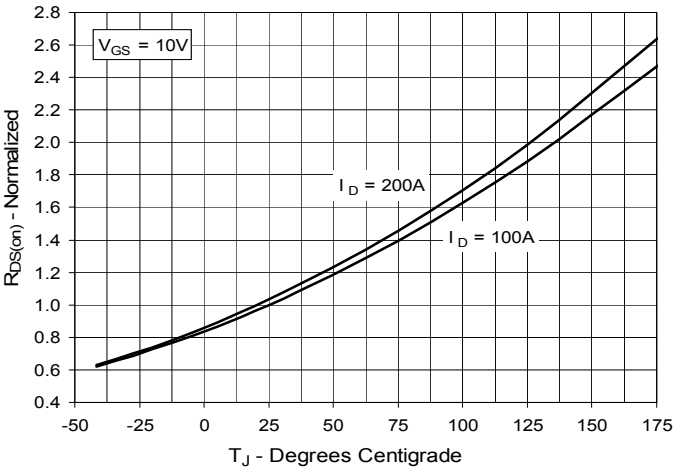


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 100A Value vs. Drain Current


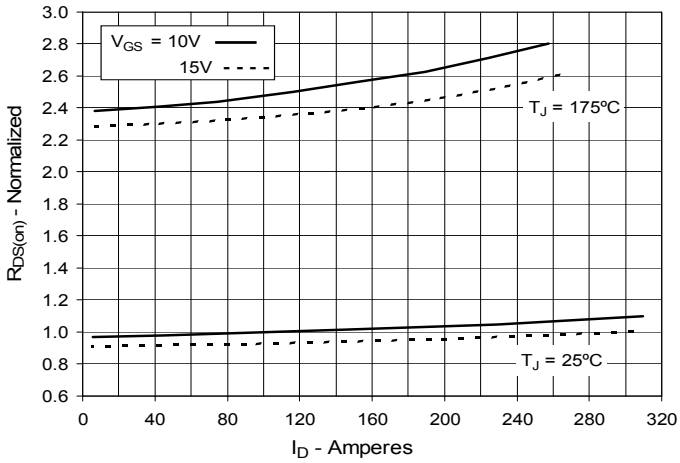


Fig. 6. Drain Current vs. Case Temperature

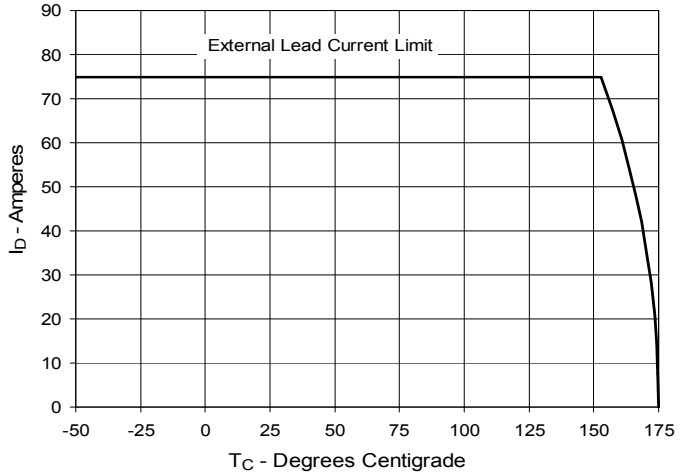

© 2008 IXYS CORPORATION, All rights reserved

Fig. 7. Input Admittance

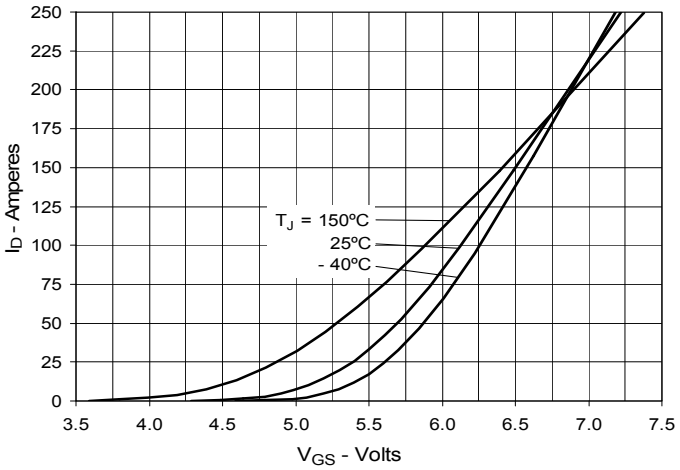


Fig. 8. Transconductance

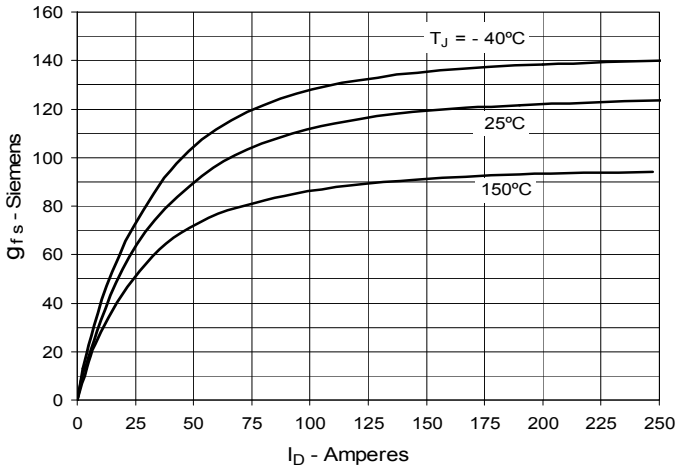


Fig. 9. Forward Voltage Drop of Intrinsic Diode

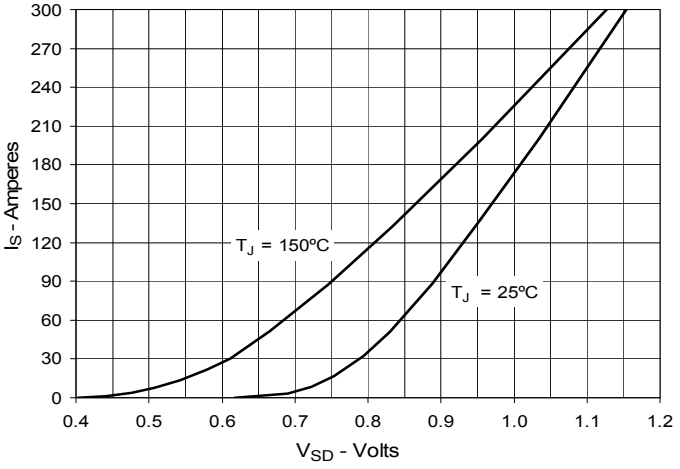


Fig. 10. Gate Charge

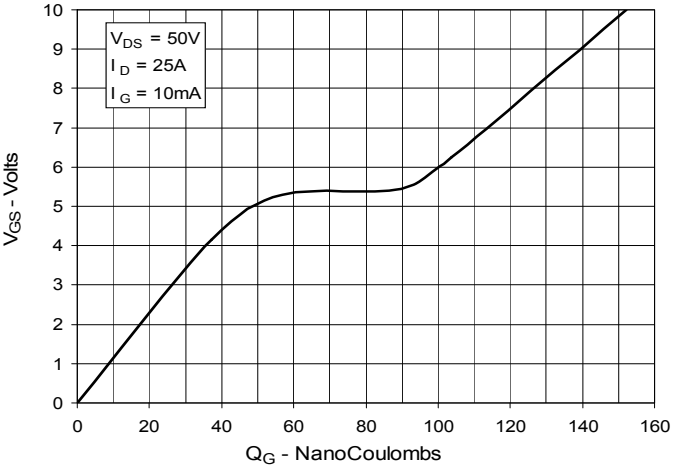


Fig. 11. Capacitance


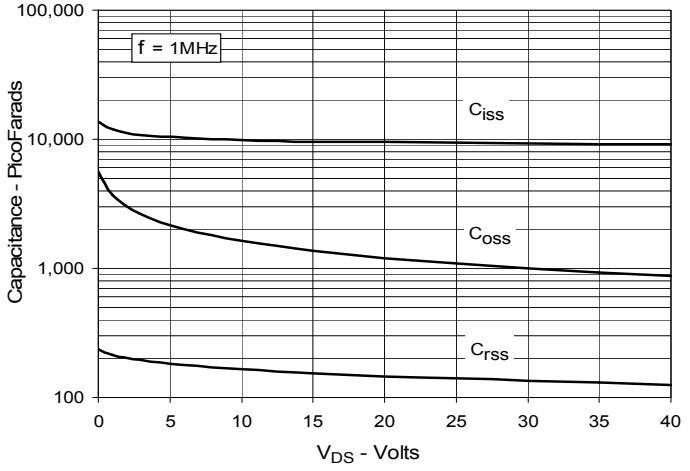


Fig. 12. Maximum Transient Thermal Impedance

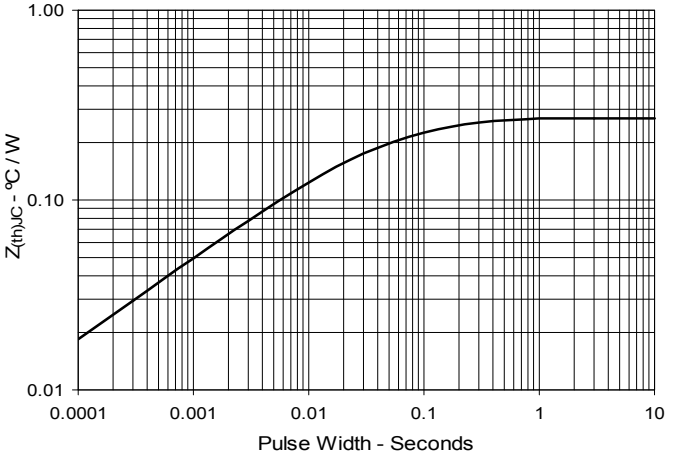

IXYS reserves the right to change limits, test conditions, and dimensions.

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

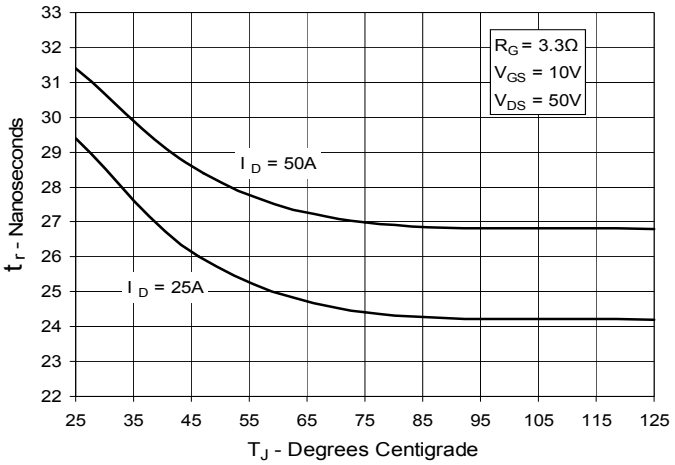


Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

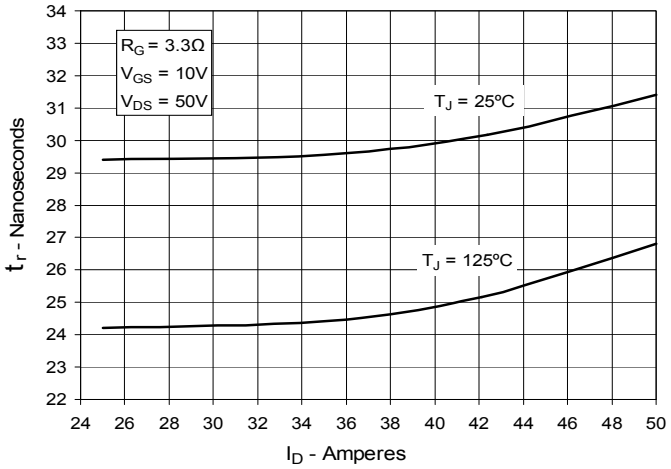


Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

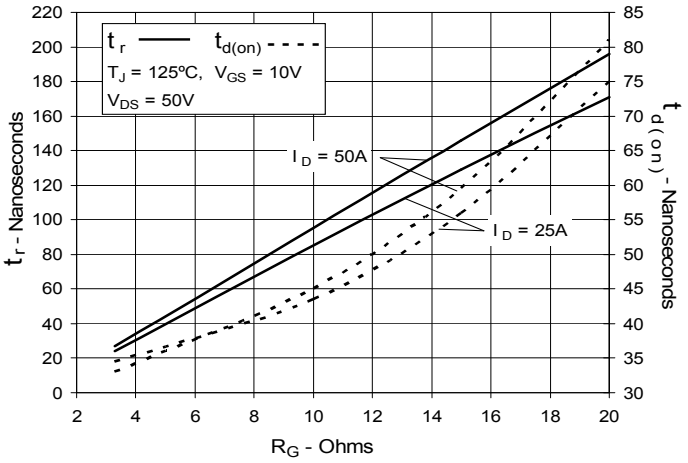


Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

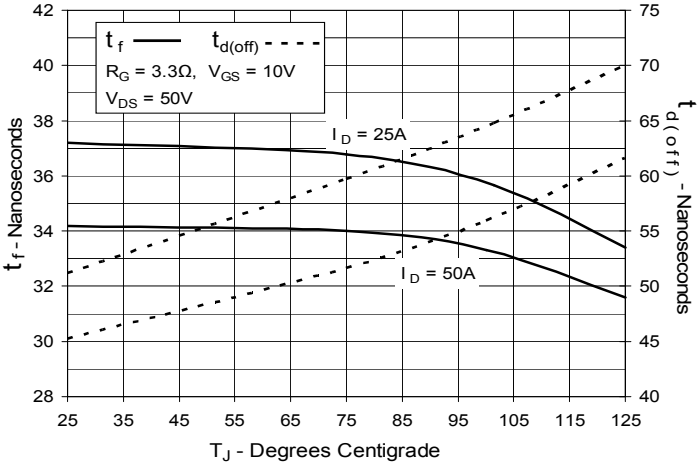


Fig. 17. Resistive Turn-off Switching Times vs. Drain Current


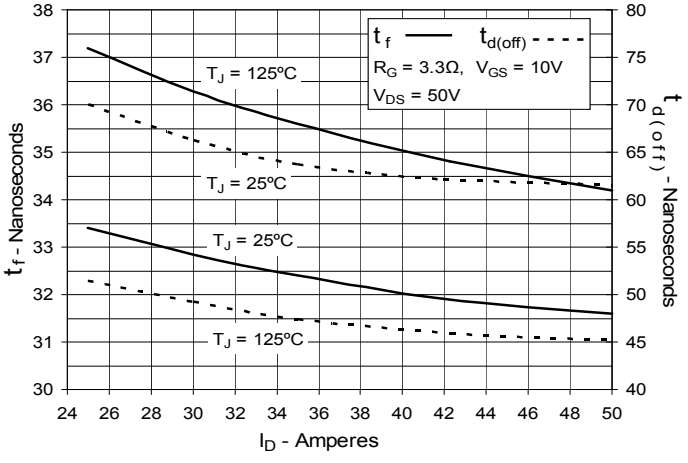


Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance



© 2008 IXYS CORPORATION, All rights reserved

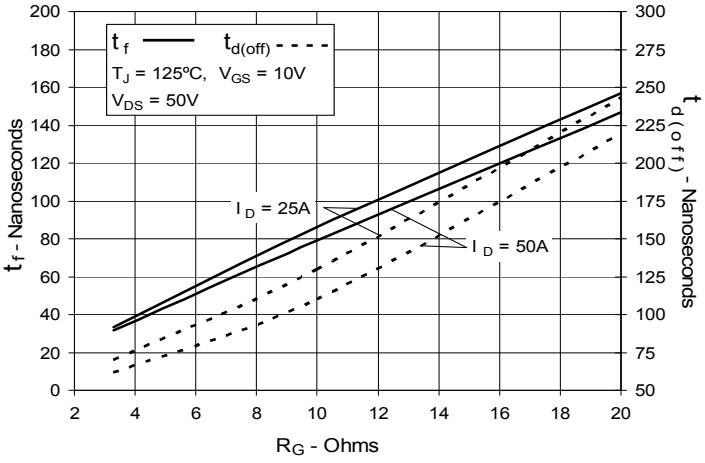

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.