

# MC74LV594A

## 8-Bit Shift Register with Output Register

The MC74LV594A is an 8-bit shift register designed for 2 V to 6.0 V  $V_{CC}$  operation. The device contains an 8-bit serial-in, parallel-out shift register that feeds an 8-bit D-type storage register. Separate clocks (RCLK, SRCLK) and direct overriding clear ( $\overline{RCLR}$ ,  $\overline{SRCLR}$ ) inputs are provided on the shift and storage registers. A serial output ( $Q_H$ ) is provided for cascading purposes.

The shift-register (SRCLK) and storage-register (RCLK) clocks are positive-edge triggered. If the clocks are tied together, the shift register always is one clock pulse ahead of the storage register.


### Features

- 2.0 V to 6.0 V  $V_{CC}$  Operation
- Low Input Current: 1.0  $\mu A$
- Max  $t_{pd}$  of 6.5 ns at 5 V
- Typical  $V_{OLP}$  (Output Ground Bounce) < 0.8 V at  $V_{CC} = 3.3$  V,  $T_A = 25^\circ C$
- Typical  $V_{OHV}$  (Output  $V_{OH}$  Undershoot) > 2.3 V at  $V_{CC} = 3.3$  V,  $T_A = 25^\circ C$
- Support Mixed-Mode Voltage Operation on All Ports
- 8-Bit Serial-In, Parallel-Out Shift Registers With Storage
- Independent Direct Overriding Clears on Shift and Storage Registers
- Independent Clocks for Shift and Storage Registers
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance with the Requirements Defined by JEDEC Standard No. 7A
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

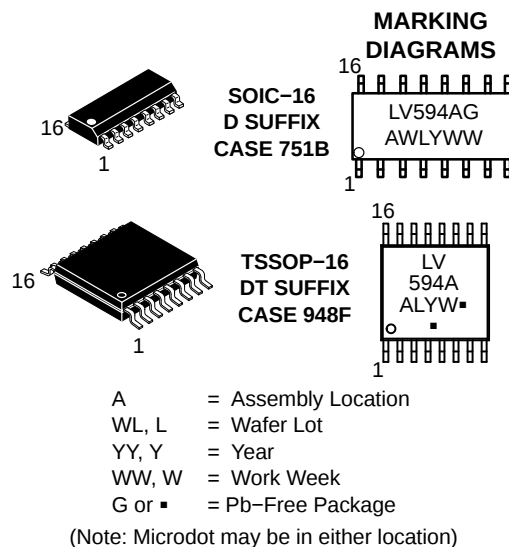

### PIN ASSIGNMENT

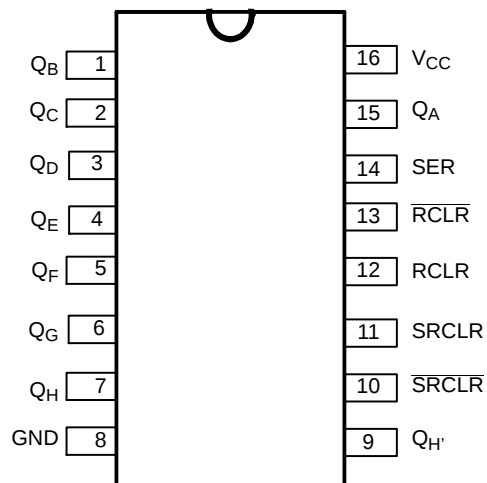

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 4 of this data sheet.

# MC74LV594A

FUNCTION TABLE

| INPUTS |       |                           |      |                          | FUNCTION                                                                                                 |
|--------|-------|---------------------------|------|--------------------------|----------------------------------------------------------------------------------------------------------|
| SER    | SRCLK | $\overline{\text{SRCLR}}$ | RCLK | $\overline{\text{RCLR}}$ |                                                                                                          |
| X      | X     | L                         | X    | X                        | Shift register is cleared.                                                                               |
| L      | ↑     | H                         | X    | X                        | First stage of shift register goes low.<br>Other stages store the data of previous stage, respectively.  |
| H      | ↑     | H                         | X    | X                        | First stage of shift register goes high.<br>Other stages store the data of previous stage, respectively. |
| L      | ↓     | H                         | X    | X                        | Shift register state is not changed.                                                                     |
| X      | X     | X                         | X    | L                        | Storage register is cleared.                                                                             |
| X      | X     | X                         | ↑    | H                        | Shift register data is stored in the storage register.                                                   |
| X      | X     | X                         | ↓    | H                        | Storage register state is not changed.                                                                   |

# MC74LV594A

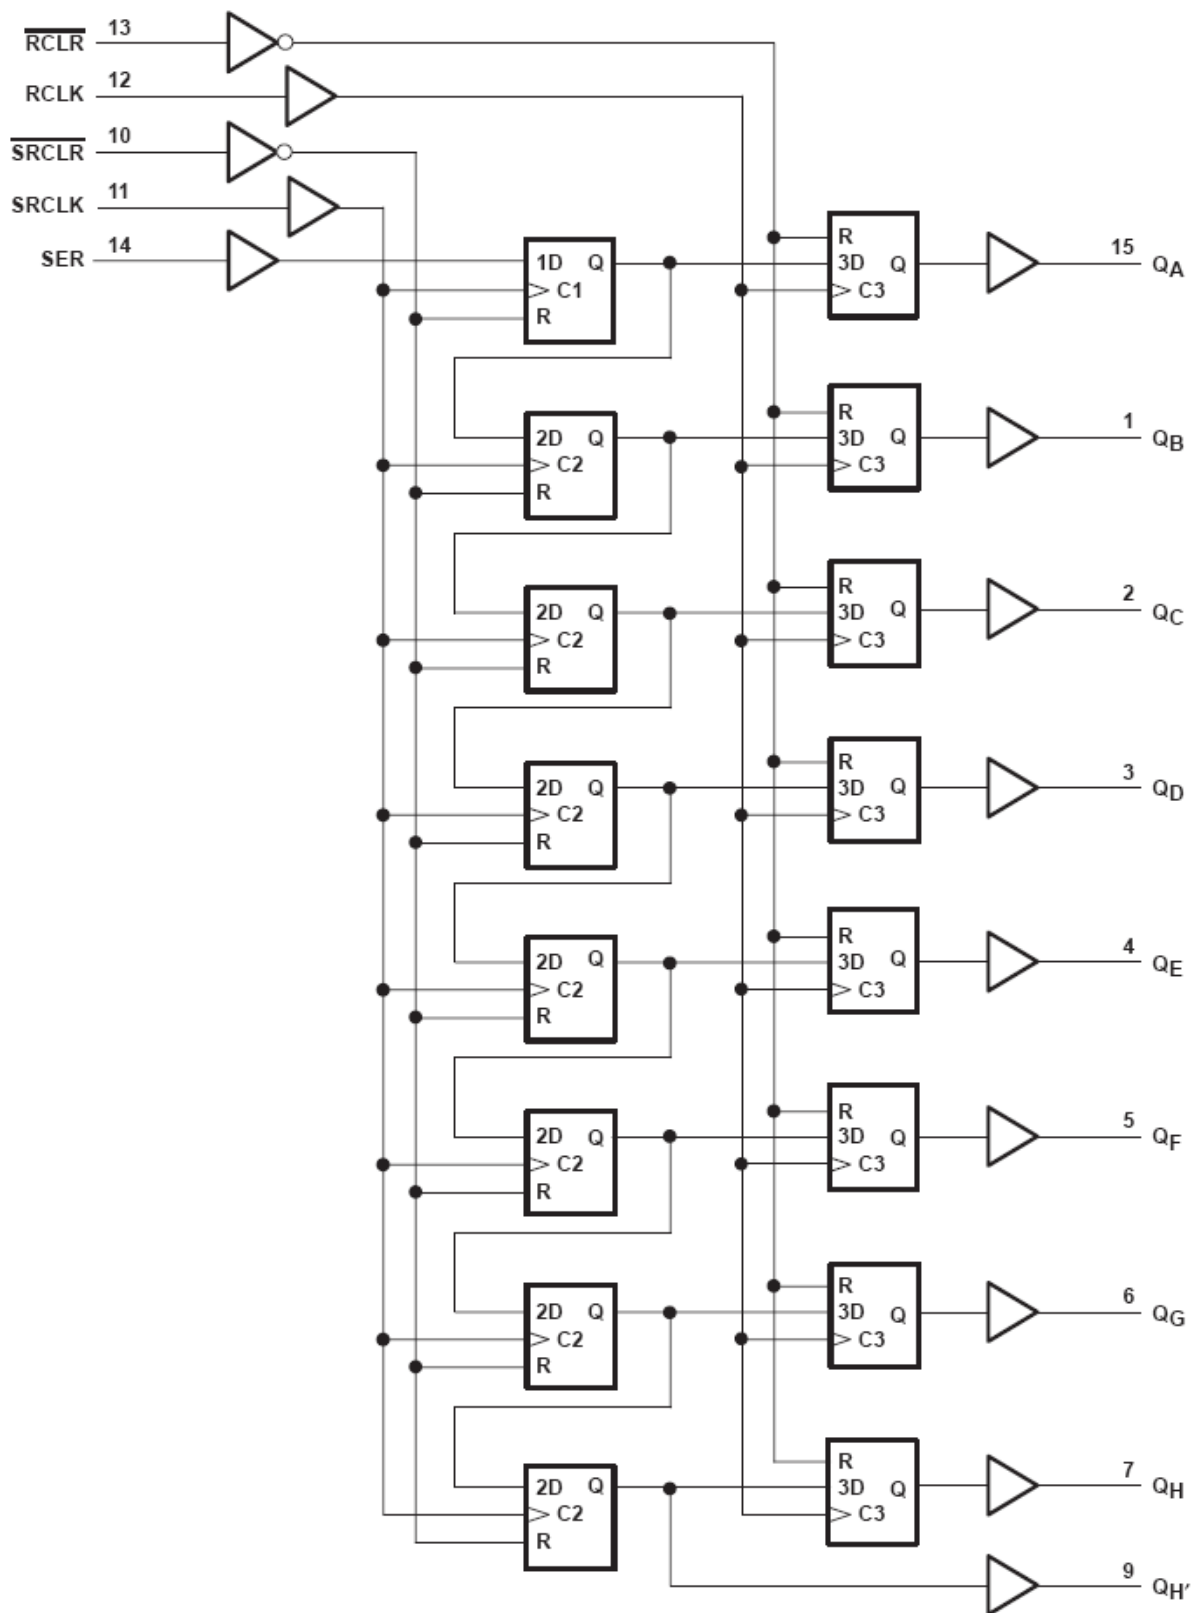


Figure 1. Logic Diagram

# MC74LV594A

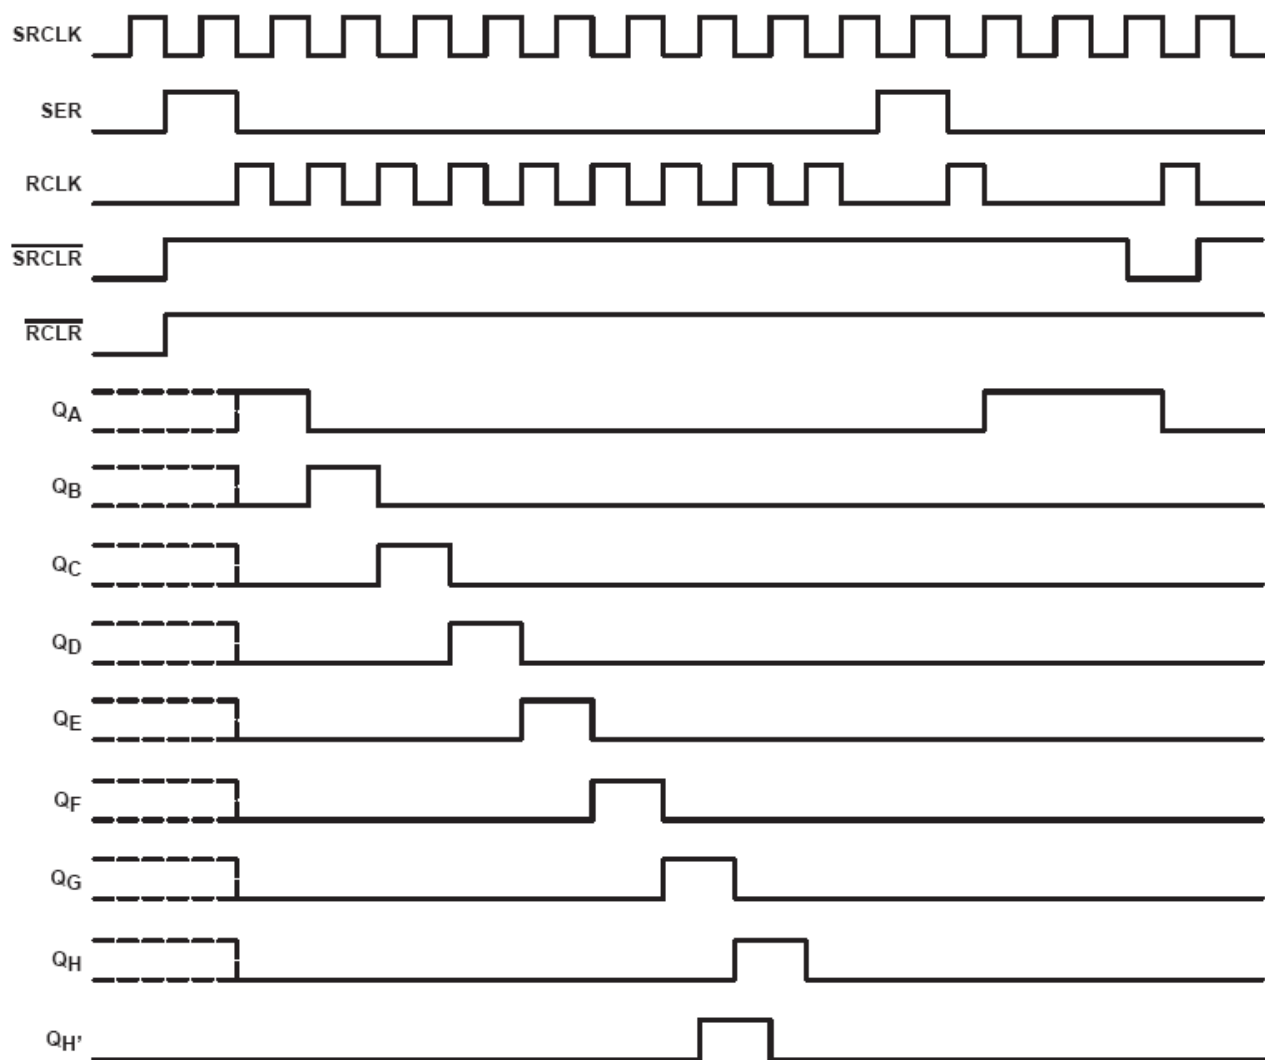


Figure 2. Timing Diagram

## ORDERING INFORMATION

| Device          | Package               | Shipping <sup>†</sup> |
|-----------------|-----------------------|-----------------------|
| MC74LV594ADR2G  | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel    |
| MC74LV594ADTR2G | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MC74LV594A

## MAXIMUM RATINGS

| Symbol        | Parameter                                                                                                  | Value                  | Unit |
|---------------|------------------------------------------------------------------------------------------------------------|------------------------|------|
| $V_{CC}$      | DC Supply Voltage                                                                                          | -0.5 to +7.0           | V    |
| $V_I$         | DC Input Voltage                                                                                           | -0.5 to $V_{CC} + 0.5$ | V    |
| $V_O$         | DC Output Voltage Active Mode (Note 1)                                                                     | -0.5 to $V_{CC} + 0.5$ | V    |
|               | High Impedance or Power-Off Mode                                                                           | -0.5 to +7.0           |      |
| $I_{IK}$      | DC Input Clamp Current                                                                                     | $\pm 20$               | mA   |
| $I_{OK}$      | DC Output Clamp Current                                                                                    | $\pm 35$               | mA   |
| $I_{IN}$      | DC Input Current                                                                                           | $\pm 20$               | mA   |
| $I_O$         | DC Output Source / Sink Current                                                                            | $\pm 35$               | mA   |
| $I_{CC}$      | DC Supply Current per Supply Pin                                                                           | $\pm 75$               | mA   |
| $I_{GND}$     | DC Ground Current per Ground Pin                                                                           | $\pm 75$               | mA   |
| $T_{STG}$     | Storage Temperature Range                                                                                  | -65 to +150            | °C   |
| $T_L$         | Lead temperature, 1 mm from Case for 10 Seconds                                                            | 260                    | °C   |
| $T_J$         | Junction temperature under Bias                                                                            | +150                   | °C   |
| $\theta_{JA}$ | Thermal Resistance SOIC<br>TSSOP                                                                           | 112<br>148             | °C   |
| $P_D$         | Power Dissipation in Still Air at SOIC<br>TSSOP                                                            | 500<br>450             | mW   |
| MSL           | Moisture Sensitivity                                                                                       | Level 1                |      |
| $F_R$         | Flammability Rating Oxygen Index: 30% – 35%                                                                | UL-94-VO (0.125 in)    |      |
| $V_{ESD}$     | ESD Withstand Voltage Human Body Model (Note 2)<br>Machine Model (Note 3)<br>Charged Device Model (Note 4) | > 3000<br>>400<br>N/A  | V    |
| $I_{Latchup}$ | Latchup Performance Above $V_{CC}$ and Below GND at 85°C (Note 5)                                          | $\pm 300$              | mA   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1.  $I_O$  absolute maximum rating must be observed.
2. Tested to EIA/JESD22-A114-A.
3. Tested to EIA/JESD22-A115-A.
4. Tested to JESD22-C101-A.
5. Tested to EIA/JESD78.

## RECOMMENDED OPERATING CONDITIONS (Note 6)

| Symbol     | Parameter                                                                                                | Min         | Max                | Unit |
|------------|----------------------------------------------------------------------------------------------------------|-------------|--------------------|------|
| $V_{CC}$   | DC Supply Voltage (Referenced to GND)                                                                    | 2.0         | 6.0                | V    |
| $V_I$      | DC Input Voltage (Referenced to GND)                                                                     | 0           | $V_{CC}$           | V    |
| $V_O$      | DC Output Voltage (Referenced to GND)                                                                    | 0           | $V_{CC}$           | V    |
| $T_A$      | Operating Free-Air Temperature                                                                           | -55         | +85                | °C   |
| $t_r, t_f$ | Input Rise or Fall Rate<br>$V_{CC} = 2.0\text{ V}$<br>$V_{CC} = 4.5\text{ V}$<br>$V_{CC} = 6.0\text{ V}$ | 0<br>0<br>0 | 1000<br>500<br>400 | nS   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

6. All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

# MC74LV594A

## DC ELECTRICAL CHARACTERISTICS

| Symbol          | Parameter                         | Conditions                                                    | V <sub>CC</sub> , (V) | Guaranteed Limits     |      |                       |                                 |                       | Unit |
|-----------------|-----------------------------------|---------------------------------------------------------------|-----------------------|-----------------------|------|-----------------------|---------------------------------|-----------------------|------|
|                 |                                   |                                                               |                       | T <sub>A</sub> = 25°C |      |                       | T <sub>A</sub> = -55°C to 125°C |                       |      |
|                 |                                   |                                                               |                       | Min                   | Typ  | Max                   | Min                             | Max                   |      |
| V <sub>IH</sub> | Minimum High-Level Input Voltage  |                                                               | 2.0                   | 1.5                   |      |                       | 1.5                             |                       | V    |
|                 |                                   |                                                               | 2.3 – 6.0             | 0.7 x V <sub>CC</sub> |      |                       | 0.7 x V <sub>CC</sub>           |                       |      |
| V <sub>IL</sub> | Maximum Low-Level Input Voltage   |                                                               | 2.0                   |                       |      | 0.5                   |                                 | 0.5                   | V    |
|                 |                                   |                                                               | 2.3 – 6.0             |                       |      | 0.3 x V <sub>CC</sub> |                                 | 0.3 x V <sub>CC</sub> |      |
| V <sub>OH</sub> | Minimum High-Level Output Voltage | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>          |                       |                       |      |                       |                                 |                       | V    |
|                 |                                   | I <sub>OH</sub> = -50 μA                                      | 2.0 – 6.0             | V <sub>CC</sub> - 0.1 |      |                       | V <sub>CC</sub> - 0.1           |                       |      |
|                 |                                   | I <sub>OH</sub> = -2 mA                                       | 2.3                   | 2                     |      |                       | 2                               |                       |      |
|                 |                                   | I <sub>OH</sub> = -6 mA                                       | 3.0                   | 2.48                  |      |                       | 2.48                            |                       |      |
|                 |                                   | I <sub>OH</sub> = -12 mA                                      | 4.5                   | 3.8                   |      |                       | 3.8                             |                       |      |
| V <sub>OL</sub> | Maximum Low-Level Output Voltage  | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>          |                       |                       |      |                       |                                 |                       | V    |
|                 |                                   | I <sub>OH</sub> = 50 μA                                       | 2.0 – 6.0             |                       |      | 0.1                   |                                 | 0.1                   |      |
|                 |                                   | I <sub>OH</sub> = 2 mA                                        | 2.3                   |                       |      | 0.4                   |                                 | 0.4                   |      |
|                 |                                   | I <sub>OH</sub> = 6 mA                                        | 3.0                   |                       |      | 0.44                  |                                 | 0.44                  |      |
|                 |                                   | I <sub>OH</sub> = 12 mA                                       | 4.5                   |                       |      | 0.55                  |                                 | 0.55                  |      |
| I <sub>IN</sub> | Maximum Input Leakage Current     | V <sub>I</sub> = V <sub>CC</sub> or GND                       | 6.0                   |                       | ±0.1 |                       | ±1                              |                       | μA   |
| I <sub>CC</sub> | Maximum Supply Current            | V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0 A | 6.0                   |                       |      | 8.0                   |                                 | 80                    | μA   |
| C <sub>I</sub>  | Input Capacitance                 | V <sub>I</sub> = V <sub>CC</sub> or GND                       | 3.3                   |                       | 3.5  |                       |                                 |                       | pF   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# MC74LV594A

## TIMING SPECIFICATIONS (See Figure 3)

| Symbol          | Parameter      | Conditions                          | V <sub>CC</sub> (V) | T <sub>A</sub> = 25°C |     | T <sub>A</sub> = -55°C to 125°C |     | Unit |
|-----------------|----------------|-------------------------------------|---------------------|-----------------------|-----|---------------------------------|-----|------|
|                 |                |                                     |                     | Min                   | Max | Min                             | Max |      |
| t <sub>W</sub>  | Pulse Duration | RCLK or SRCLK High or Low           | 2.3 – 2.7           | 7                     |     | 7.5                             |     | ns   |
|                 |                |                                     | 3.0 – 3.6           | 5.5                   |     | 5.5                             |     |      |
|                 |                |                                     | 4.5 – 5.5           | 5                     |     | 5                               |     |      |
|                 |                | RCLR or SRCLR Low                   | 2.3 – 2.7           | 6                     |     | 6.5                             |     |      |
|                 |                |                                     | 3.0 – 3.6           | 5                     |     | 5                               |     |      |
|                 |                |                                     | 4.5 – 5.5           | 5.2                   |     | 5.2                             |     |      |
| t <sub>SU</sub> | Setup Time     | SER before SRCLK↑                   | 2.3 – 2.7           | 5.5                   |     | 5.5                             |     | ns   |
|                 |                |                                     | 3.0 – 3.6           | 3.5                   |     | 3.5                             |     |      |
|                 |                |                                     | 4.5 – 5.5           | 3                     |     | 3                               |     |      |
|                 |                | SRCLK↑ before RCLK↑                 | 2.3 – 2.7           | 8                     |     | 9                               |     |      |
|                 |                |                                     | 3.0 – 3.6           | 8                     |     | 8.5                             |     |      |
|                 |                |                                     | 4.5 – 5.5           | 5                     |     | 5                               |     |      |
|                 |                | SRCLR Low before RCLK↑              | 2.3 – 2.7           | 8.5                   |     | 9.5                             |     |      |
|                 |                |                                     | 3.0 – 3.6           | 8                     |     | 9                               |     |      |
|                 |                |                                     | 4.5 – 5.5           | 5                     |     | 5                               |     |      |
|                 |                | SRCLR High (Inactive) before SRCLK↑ | 2.3 – 2.7           | 6                     |     | 6.8                             |     |      |
|                 |                |                                     | 3.0 – 3.6           | 4.2                   |     | 4.8                             |     |      |
|                 |                |                                     | 4.5 – 5.5           | 2.9                   |     | 3.3                             |     |      |
|                 |                | RCLR High (Inactive) before RCLK↑   | 2.3 – 2.7           | 6.7                   |     | 7.6                             |     |      |
|                 |                |                                     | 3.0 – 3.6           | 4.6                   |     | 5.3                             |     |      |
|                 |                |                                     | 4.5 – 5.5           | 3.2                   |     | 3.7                             |     |      |
| t <sub>H</sub>  | Hold Time      | SER after SRCLK↑                    | 2.3 – 2.7           | 1.5                   |     | 1.5                             |     | ns   |
|                 |                |                                     | 3.0 – 3.6           | 1.5                   |     | 1.5                             |     |      |
|                 |                |                                     | 4.5 – 5.5           | 2                     |     | 2                               |     |      |

# MC74LV594A

## AC CHARACTERISTICS (See Figure 3)

| Symbol           | Paraeter                      | Load<br>Condi-<br>tions | Input to Output                        | V <sub>CC</sub> , (V) | Guaranteed Limits     |      |      |                                 |      | Unit |
|------------------|-------------------------------|-------------------------|----------------------------------------|-----------------------|-----------------------|------|------|---------------------------------|------|------|
|                  |                               |                         |                                        |                       | T <sub>A</sub> = 25°C |      |      | T <sub>A</sub> = -55°C to 125°C |      |      |
|                  |                               |                         |                                        |                       | Min                   | Typ  | Max  | Min                             | Max  |      |
| f <sub>MAX</sub> |                               | C <sub>L</sub> = 15 pF  |                                        | 2.3 – 2.7             | 65                    | 80   |      | 45                              |      | MHz  |
|                  |                               |                         |                                        | 3.0 – 3.6             | 80                    | 120  |      | 70                              |      |      |
|                  |                               |                         |                                        | 4.5 – 5.5             | 135                   | 170  |      | 115                             |      |      |
|                  |                               | C <sub>L</sub> = 50 pF  |                                        | 2.3 – 2.7             | 50                    | 51   |      | 40                              |      |      |
|                  |                               |                         |                                        | 3.0 – 3.6             | 70                    | 74   |      | 55                              |      |      |
|                  |                               |                         |                                        | 4.5 – 5.5             | 115                   | 120  |      | 90                              |      |      |
| t <sub>PLH</sub> | Propagation Delay Low to High | C <sub>L</sub> = 15 pF  | RCLK to Q <sub>A</sub> –Q <sub>H</sub> | 2.3 – 2.7             |                       |      | 27.5 | 1                               | 32.5 | ns   |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       |      | 18   | 1                               | 22.5 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       |      | 12   | 1                               | 15   |      |
|                  |                               |                         | SRCLK to Q <sub>H'</sub>               | 2.3 – 2.7             |                       |      | 27.5 | 1                               | 32   |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       |      | 18   | 1                               | 22   |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       |      | 12.5 | 1                               | 12   |      |
|                  |                               | C <sub>L</sub> = 50 pF  | RCLK to Q <sub>A</sub> –Q <sub>H</sub> | 2.3 – 2.7             |                       | 22.1 | 25.0 | 1                               | 30.0 |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       | 15.6 | 17.5 | 1                               | 21.0 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       | 11.5 | 12.5 | 1                               | 15.5 |      |
|                  |                               |                         | SRCLK to Q <sub>H'</sub>               | 2.3 – 2.7             |                       | 21.6 | 25.5 | 1                               | 29.5 |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       | 15.2 | 18.0 | 1                               | 21.0 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       | 10.9 | 12.5 | 1                               | 15.0 |      |
| t <sub>PHL</sub> | Propagation Delay High to Low | C <sub>L</sub> = 15 pF  | RCLK to Q <sub>A</sub> –Q <sub>H</sub> | 2.3 – 2.7             |                       |      | 23   | 1                               | 27.5 | ns   |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       |      | 15.5 | 1                               | 19   |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       |      | 11   | 1                               | 14   |      |
|                  |                               |                         | SRCLK to Q <sub>H'</sub>               | 2.3 – 2.7             |                       |      | 23.5 | 1                               | 27   |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       |      | 16   | 1                               | 19   |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       |      | 11   | 1                               | 13.5 |      |
|                  |                               |                         | RCLR to Q <sub>A</sub> –Q <sub>H</sub> | 2.3 – 2.7             |                       |      | 20.5 | 1                               | 25   |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       |      | 14.5 | 1                               | 17.5 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       |      | 10   | 1                               | 12   |      |
|                  |                               |                         | SRCLR to Q <sub>H'</sub>               | 2.3 – 2.7             |                       |      |      | 1                               | 23   |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       |      | 13   | 1                               | 16   |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       |      | 9    | 1                               | 11   |      |
|                  |                               | C <sub>L</sub> = 50 pF  | RCLK to Q <sub>A</sub> –Q <sub>H</sub> | 2.3 – 2.7             |                       | 19.7 | 23.0 | 1                               | 27.0 |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       | 14.0 | 16.5 | 1                               | 19.5 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       | 10.1 | 11.5 | 1                               | 13.5 |      |
|                  |                               |                         | SRCLK to Q <sub>H'</sub>               | 2.3 – 2.7             |                       | 18.4 | 21.5 | 1                               | 25.0 |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       | 13.1 | 15.0 | 1                               | 18.0 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       | 9.0  | 10.5 | 1                               | 12.5 |      |
|                  |                               |                         | RCLR to Q <sub>A</sub> –Q <sub>H</sub> | 2.3 – 2.7             |                       | 25.7 | 30.0 | 1                               | 35.0 |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       | 17.6 | 20.0 | 1                               | 24.5 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       | 12.2 | 13.5 | 1                               | 17.0 |      |
|                  |                               |                         | SRCLR to Q <sub>H'</sub>               | 2.3 – 2.7             |                       | 25.3 | 30.0 | 1                               | 34   |      |
|                  |                               |                         |                                        | 3.0 – 3.6             |                       | 17.3 | 20.0 | 1                               | 24.0 |      |
|                  |                               |                         |                                        | 4.5 – 5.5             |                       | 11.9 | 14.0 | 1                               | 16.5 |      |

# MC74LV594A


## NOISE CHARACTERISTICS, $V_{CC} = 3.3\text{ V}$ , $C_L = 50\text{ pF}$ , $T_A = 25^\circ\text{C}$

| Symbol      | Parameter                              | Min  | Typ  | Max  | Unit |
|-------------|----------------------------------------|------|------|------|------|
| $V_{OL(P)}$ | Quiet Output, Maximum Dynamic $V_{OL}$ |      | 0.8  | 0.8  | V    |
| $V_{OL(V)}$ | Quiet Output, Minimum Dynamic $V_{OL}$ |      | -0.1 | -0.8 | V    |
| $V_{OH(V)}$ | Quiet Output, Minimum Dynamic $V_{OH}$ |      | 2.8  |      | V    |
| $V_{IH(D)}$ | High-Level Dynamic Input Voltage       | 2.31 |      |      | V    |
| $V_{IL(D)}$ | Low-Level Dynamic Input Voltage        |      |      | 0.99 | V    |

## POWER DISSIPATION CHARACTERISTICS, $T_A = 25^\circ\text{C}$

| Symbol   | Parameter                     | Test Conditions     | $V_{CC}$ (V) | Typ | Unit |
|----------|-------------------------------|---------------------|--------------|-----|------|
| $C_{PD}$ | Power Dissipation Capacitance | $f = 10\text{ MHz}$ | 3.3          | 93  | pF   |
|          |                               |                     | 5            | 112 |      |

## PARAMETER MEASUREMENT INFORMATION

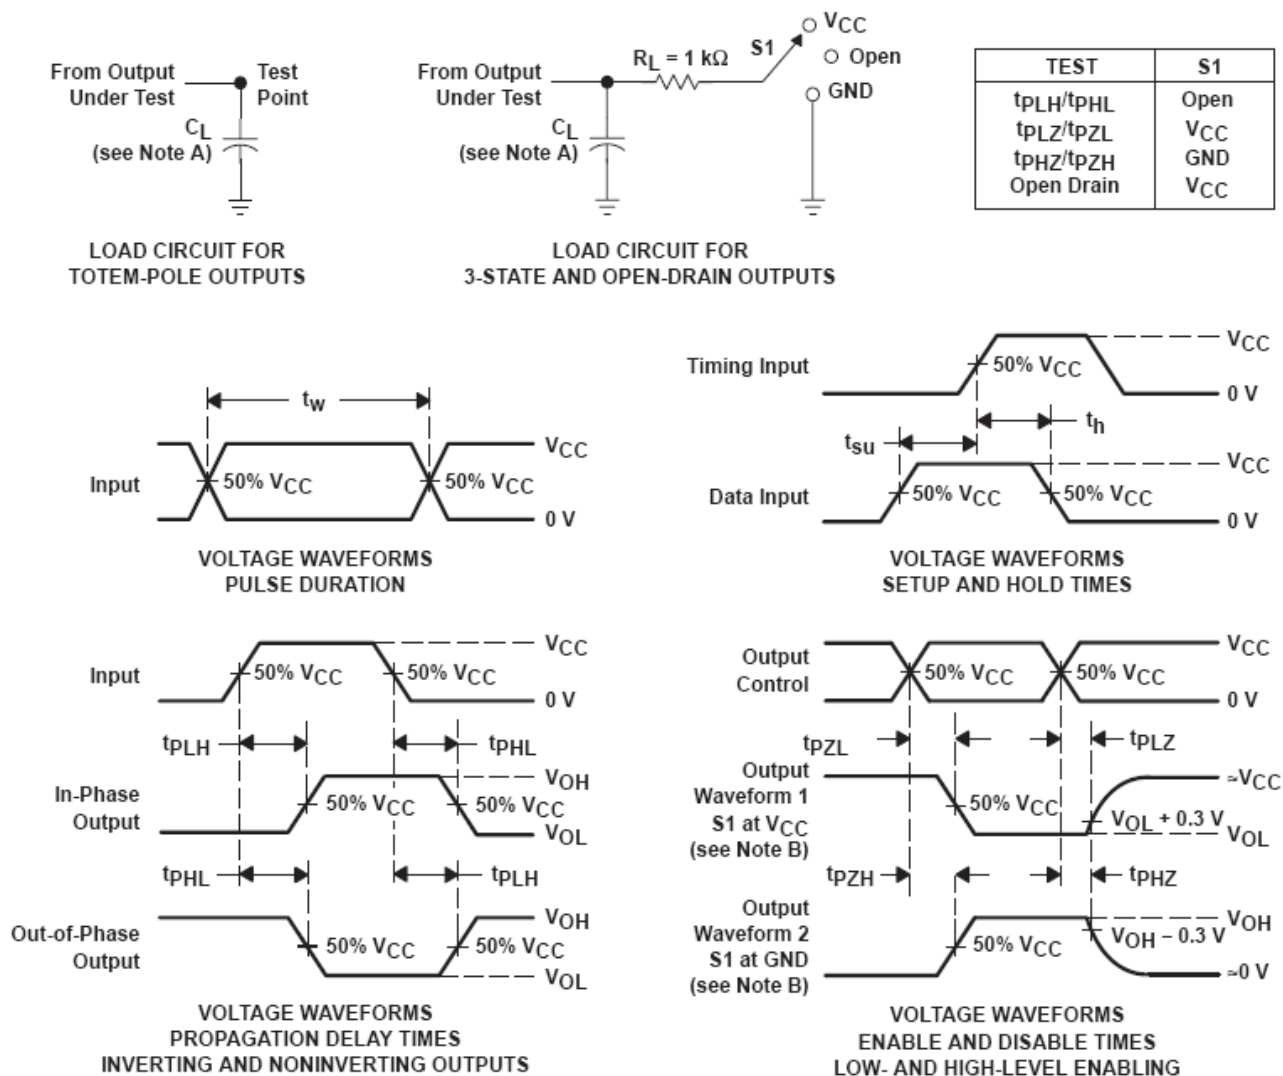


- NOTES:
- A.  $C_L$  includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1\text{ MHz}$ ,  $Z_O = 50\ \Omega$ ,  $t_r \leq 3\text{ ns}$ ,  $t_f \leq 3\text{ ns}$ .
  - D. The outputs are measured one at a time, with one input transition per measurement.
  - E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G.  $t_{PHL}$  and  $t_{PLH}$  are the same as  $t_{pd}$ .
  - H. All parameters and waveforms are not applicable to all devices.

Figure 3. Load Circuit and Voltage Waveforms

# MC74LV594A

## PACKAGE DIMENSIONS

TSSOP-16  
DT SUFFIX  
CASE 948F  
ISSUE B

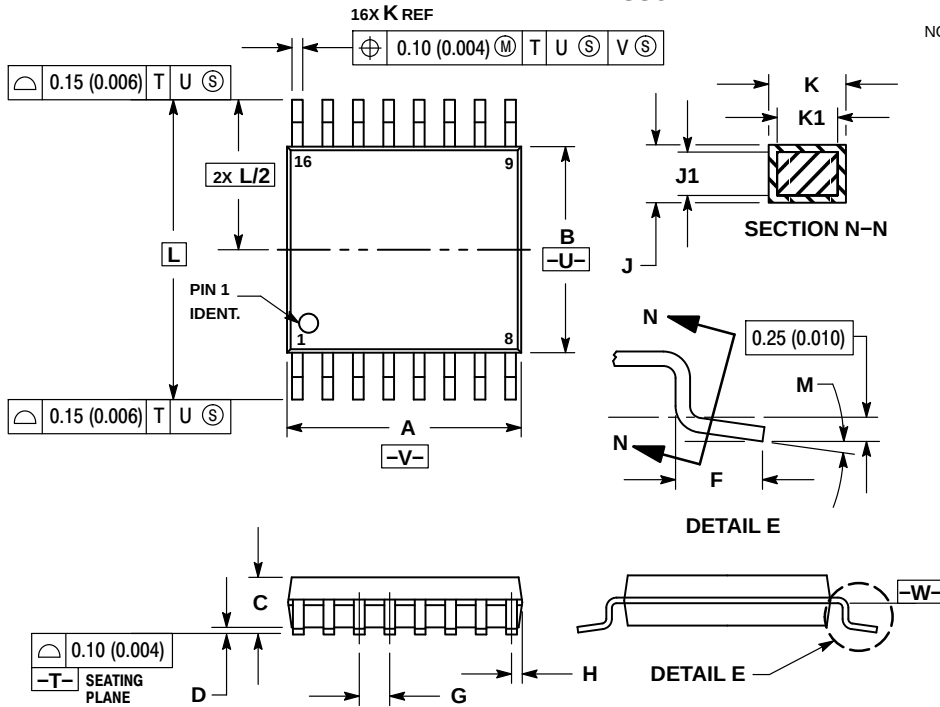


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | —           | 1.20 | —         | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.18        | 0.28 | 0.007     | 0.011 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

### SOLDERING FOOTPRINT\*

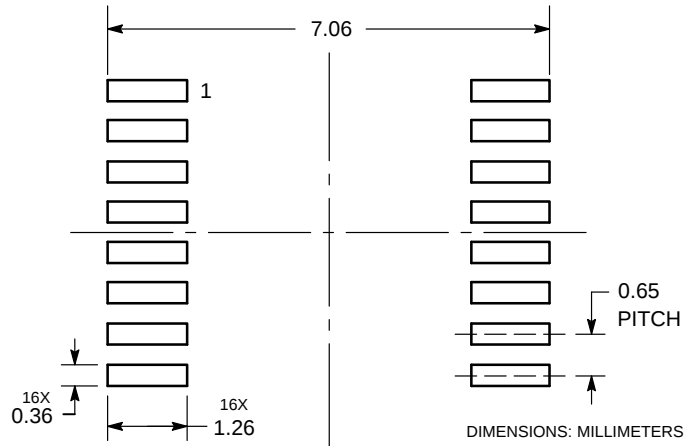


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC74LV594A

## PACKAGE DIMENSIONS

SOIC-16  
CASE 751B-05  
ISSUE K

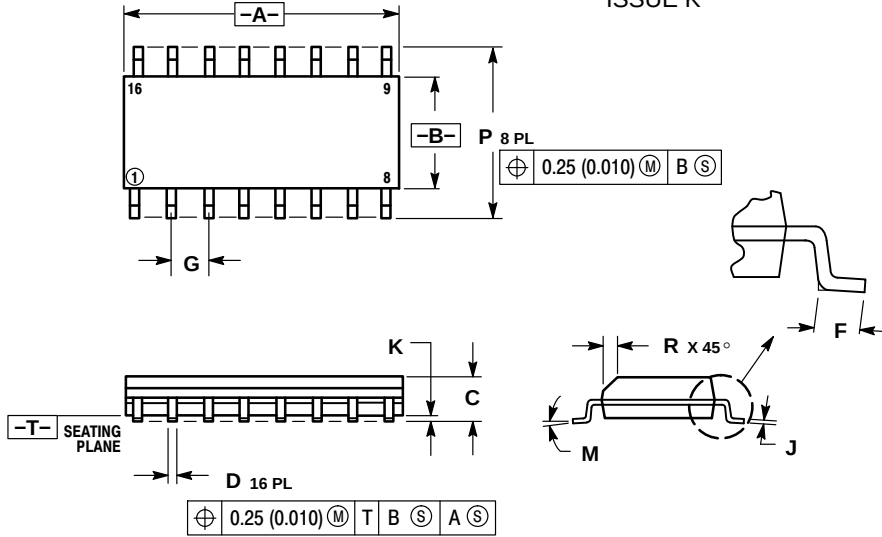


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |

### SOLDERING FOOTPRINT\*

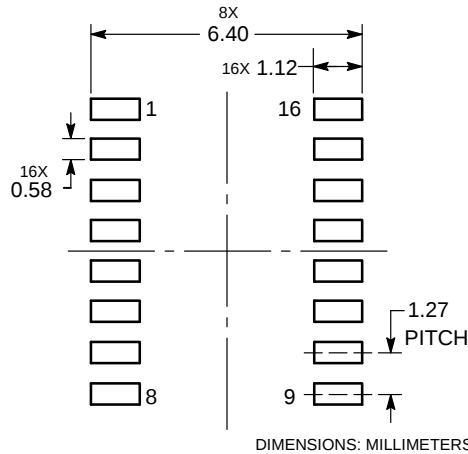

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative