


SPEC:


COMPLIANT RoHS DIRECTIVE 2011/65/UE


MATERIAL	FR4 IMPROVED (low CTE)
BOARD THICKNESS	1.6mm /63mils
STACKUP	SF /1LAYER
MINIMAL GAP	300um /12.0mils
MINIMAL SLIVER	300um /12.0mils
COPPER THICKNESS	35um(1oz)at START
FINISH THICKNESS	CHEMICAL NiAu
SOLDER MASK	GREEN BOT
SILKSCREEN	WHITE TOP&BOT
ALL BOARD ELECTRICALLY TESTED	
MANUFACTURE 'S LOGO & DATECODE MARKED ON BOTTOM SOLDERMASK	

DRILL CHART: TOP to BOTTOM			
ALL UNITS ARE IN MILLIMETERS			
FIGURE	SIZE	PLATED	QTY
▲	0.8	PLATED	8
▲	0.9	PLATED	4
▣	1.0	PLATED	30
□	1.1	PLATED	4
▣	1.2	PLATED	4
▣	1.4	PLATED	26
▲	1.5	PLATED	2
⊙	1.6	PLATED	3
⊙	1.8	PLATED	10
▣	2.2	PLATED	2
⊕	4.0	PLATED	4
□	1.0	NON-PLATED	1
▲	3.2	NON-PLATED	3
⊐	3.5x1.0	PLATED	2

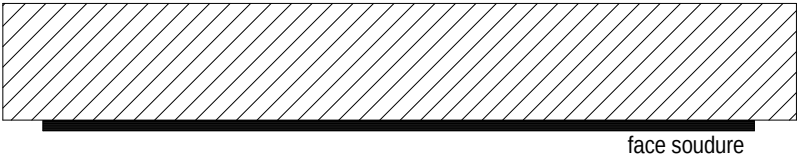

Pour les details des 4 ouvertures a detourer , voir le gerber outline.art

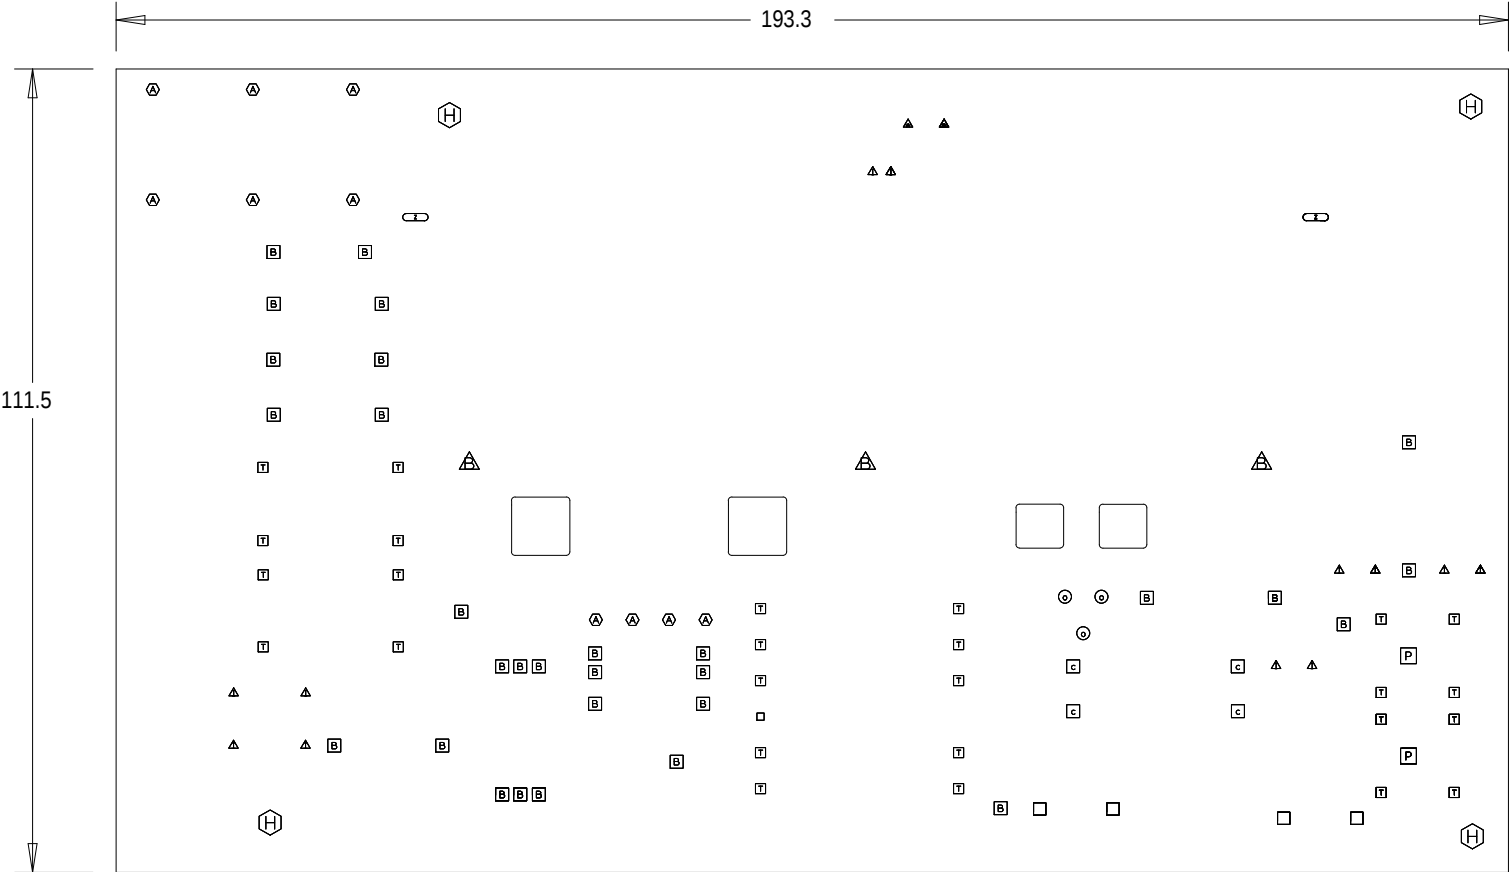

		W44/2014
indice	Description	Date
Controle par :		Autorise par:
 ON semiconductor		Definition CUT DRILL DRAWING PLAN PRECAGE DETOURAGE 
		Subc. DYPE TECH Dessine: e B Echelle: 1/1
Board: NCP1602 DEMO C TLS		Pages: 1/3
CE DOCUMENT EST LA PROPRIETE DE ON semiconductor IL NE PEUT ETRE UTILISER, REPRODUIT OU COMMUNIQUER SANS SONT AUTHORISATION THIS DOCUMENT IS ON semiconductor PROPERTY, IT MAY NOT BE USED, REPRODUCED OR TRANSMITTED WITHOUT THEIR APPROVAL.		Format: A3