

LMP8358 Evaluation Board (551600315-001) User Guide

The LMP8358 includes many features that are not explained in this Evaluation Board User Guide. Please refer to the LMP8358 datasheet for a description of the features of the LMP8358.

To use the LMP8358 Evaluation Board set the following as described below:

J1: Serial or Parallel Communication. Used to set whether the LMP8358 uses serial or parallel communication. The drawings on the PCB on the right side of J1 show how to short the jumpers. When using serial communication J15 is used to input the SPI communication signals. If using parallel communication J7, J8, and J9 are used to set the gain, J10 is used to shutdown the LMP8358. See **Communication Mode Selection** section of the datasheet.

J2: Reference select. This is used to select whether the reference is connected to GND (short GND and center pins), connected to V- (short V- and center pins), or external (no pins shorted, the external reference is input on J14).

J3: +Input. The signal on this BNC is connected to the +IN pin of the LMP8358.

J4: Output. The output of the LMP8358 is connected to this BNC.

J5: Input short. This jumper is used to short an input. If the LMP8358 is to be used with a single input, the signal is connected to J3 or J6, the other input is shorted to ground (center pin) with this jumper.

J6: -Input. The signal on this BNC is connected to the -IN pin of the LMP8358.

J7, J8, J9: These jumpers are used to set the gain of the LMP8358 when used in parallel mode. Connecting the V+ and center pins will input a high signal to the LMP8358, connecting the V- and center pins will input a low signal to the LMP8358. See **Parallel Control Interface Mode** section of the datasheet.

J10: Shutdown. This jumper is used to enable or shutdown the LMP8358 when used in parallel mode. Connecting the V+ and center pins will input a high signal to the LMP8358 which will put it in shutdown mode, connecting the V- and center pins will input a low signal to the LMP8358 which enables the LMP8358. See **Parallel Control Interface Mode** section of the datasheet.

J11: V+, Positive power supply.

J12: GND, Power ground connection.

J13: V-, Negative power supply. The LMP8358 can be used with a single supply or split supplies. To use with a single supply short J13 (V-) to ground.

J14: External Reference. Connect an external reference if no pins of J2 are shorted.

J15: Serial Communication. The SPI signal is input on this connector when the LMP8358 is used in serial mode. See **Serial Control Interface Mode** section of the datasheet.

R4, R9: External Gain Set. Use these resistors to externally set the gain. See **Gain (Serial, Parallel)** section of the datasheet.

C3: Filter Capacitor. Install a capacitor when an external filter is used. See **Filter and External Filter Capacitor** section of the datasheet.

R1, R2, R6, C1, C2: External Load. These components are used to set various loads on the output of the LMP8358.

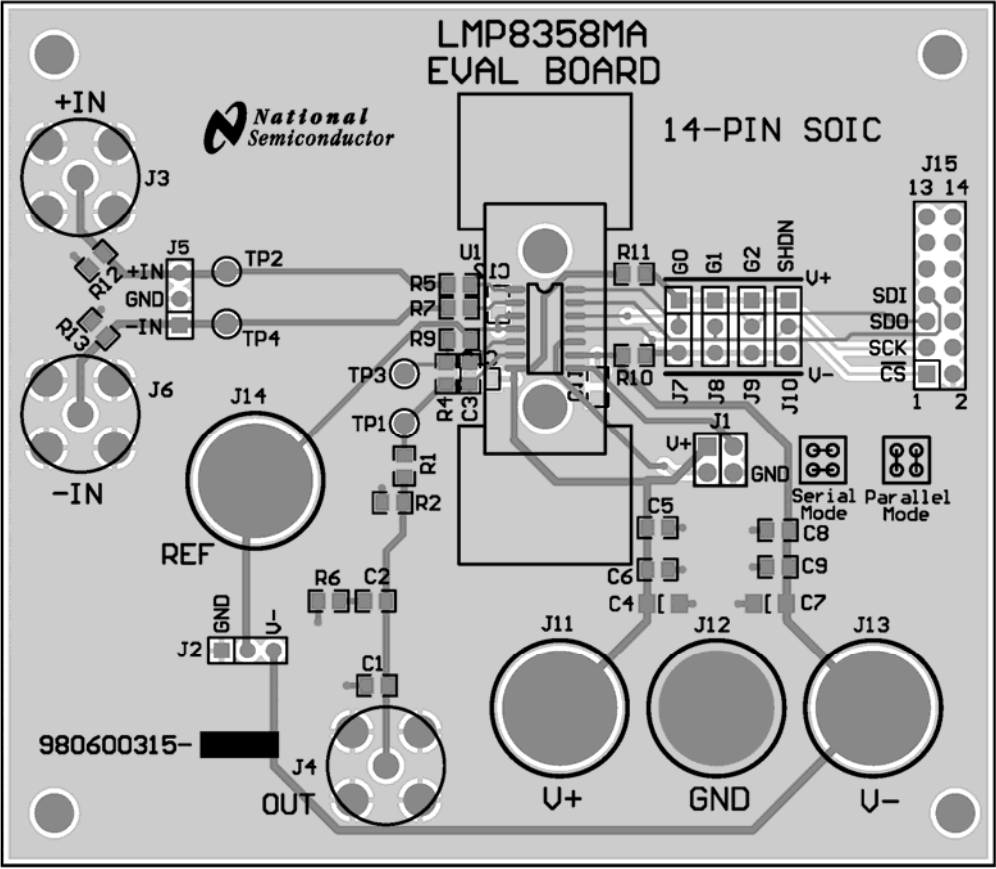


Figure 1. PCB Layout

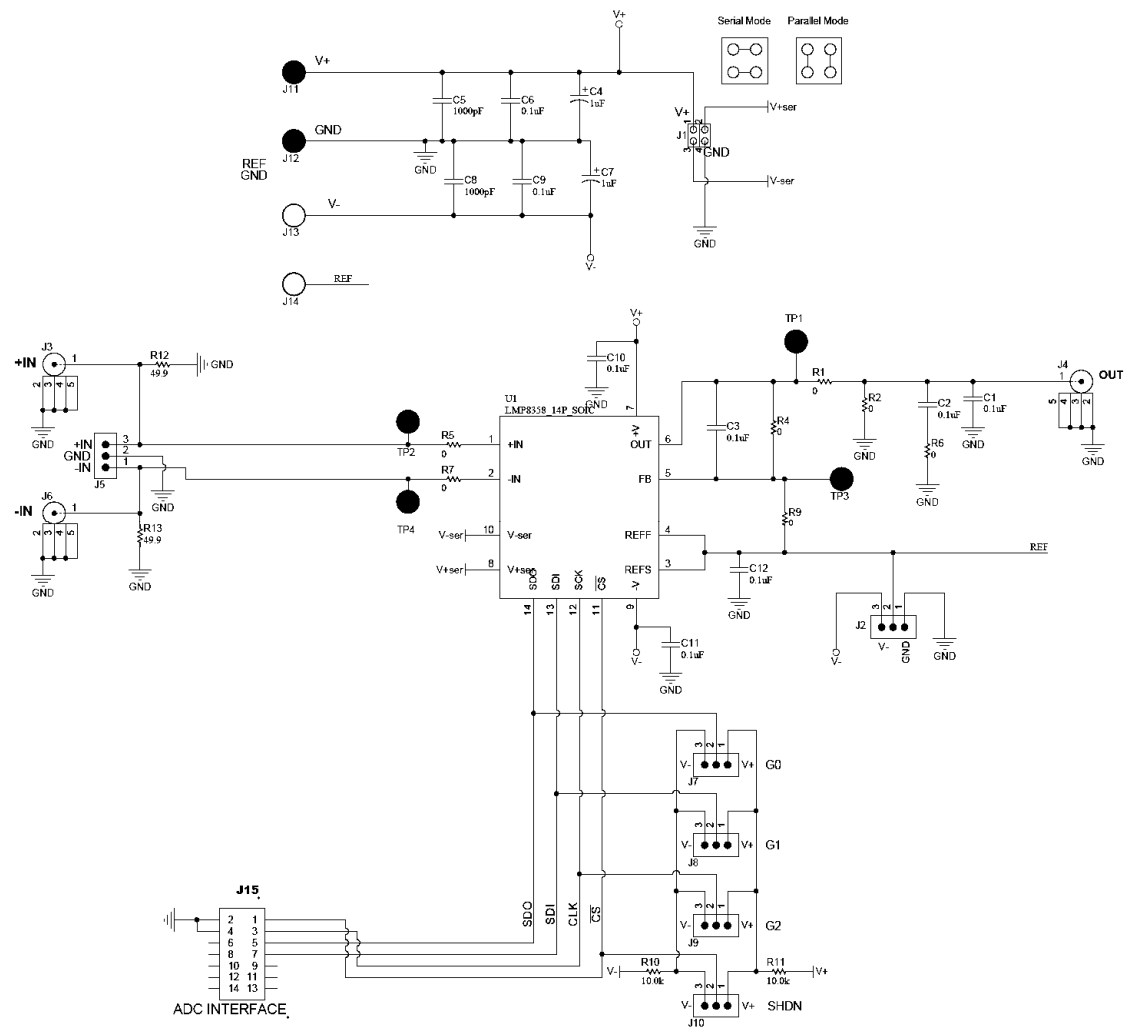


Figure 2. PCB Schematic

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated