

The **LT[®]1620/LT1621** data sheet has been revised as shown below in **bold**. For complete specifications, typical performance characteristics and applications information, please see the **LT1620/LT1621** data sheet.

 LTC and LT are registered trademarks of Linear Technology Corporation.

ELECTRICAL CHARACTERISTICS

$I_{N+} = 16.8V$, $V_{CC} = 5V$, $V_{IOUT} = 2V$, $T_A = 25^{\circ}C$ unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Transconductance Amplifier						
g_m	Amplifier Transconductance		2800 2000	3200	4200 5000	μmho μmho

The ● denotes specifications which apply over the full operating temperature range.

APPLICATIONS INFORMATION

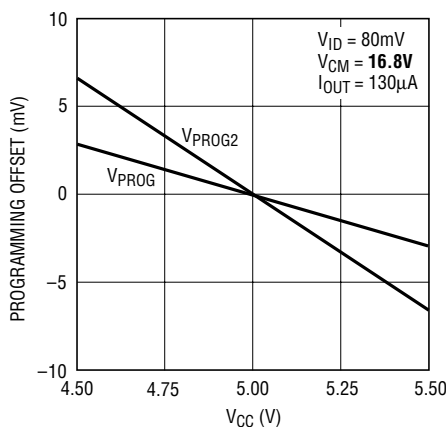


Figure 5e. Typical Setpoint Voltages for V_{PROG} and V_{PROG2} Change Slightly Depending Upon the Supply Voltage (V_{CC})

For further information regarding this specification notice contact:

Linear Technology Corporation
 1630 McCarthy Blvd.
 Milpitas, California 95035-7417
 Attn: Product Marketing Manager
 Phone: (408) 432-1900