IXYS


Advance Technical Information

LinearL2™ Power MOSFET w/Extended FBSOA


N-Channel Enhancement Mode
Avalanche Rated

IXTK240N075L2
IXTX240N075L2


V_{DSS} = 75V
I_{D25} = 240A
$R_{DS(on)}$ ≤ 7mΩ



TO-264 (IXTK)



PLUS247 (IXTX)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	75	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	75	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C (Chip Capability)	240	A
$I_{L(RMS)}$	External Lead Current Limit	160	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	720	A
I_A	T_C = 25°C	240	A
E_{AS}	T_C = 25°C	3	J
P_D	T_C = 25°C	960	W
T_J		-55...+150	°C
T_{JM}		150	°C
T_{stg}		-55...+150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
M_d	Mounting Torque (TO-264)	1.13/10	Nm/lb.in
F_C	Mounting Force (PLUS247)	20..120 /4.5..27	N/lb
Weight	TO-264	10	g
	PLUS247	6	g

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 1mA	75			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 3mA	2.0		4.5	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			10	μA
	T_J = 125°C			50	μA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 0.5 • I_{D25}, Note 1			7	mΩ

Features

- Designed for linear operation
- International standard packages
- Avalanche rated
- Guaranteed FBSOA at 75°C

Advantages

- Easy to mount
- Space savings
- High power density

Applications

- Solid state circuit breakers
- Soft start controls
- Linear amplifiers
- Programmable loads
- Current regulators

© 2016 IXYS CORPORATION, All rights reserved

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	60	86	110	S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		19		nF
C_{oss}			4420		pF
C_{rss}			1470		pF
$t_{d(on)}$	**Resistive Switching Times**		34		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		200		ns
$t_{d(off)}$	R_G = 1Ω (External)		136		ns
t_f			47		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		546		nC
Q_{gs}			86		nC
Q_{gd}			225		nC
R_{thJC}				0.13	°C/W
R_{thCS}			0.15		°C/W

Safe Operating Area Specification

Symbol	Test Conditions	Characteristic Values Min.	Typ.	Max.	
SOA	V_{DS} = 75V, I_D = 7.7A, T_C = 75°C, Tp = 5s	575			W

Source-Drain Diode


Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			240	A
I_{SM}	Repetitive, pulse width limited by T_{JM}			960	A
V_{SD}	I_F = 100A, V_{GS} = 0V, Note 1			1.5	V
t_{rr}	I_F = 120A, -di/dt = 100A/μs,		206		ns
I_{RM}	V_R = 37.5V, V_{GS} = 0V		18.8		A
Q_{RM}			1.9		μC

Note: 1. Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.


TO-264 Outline

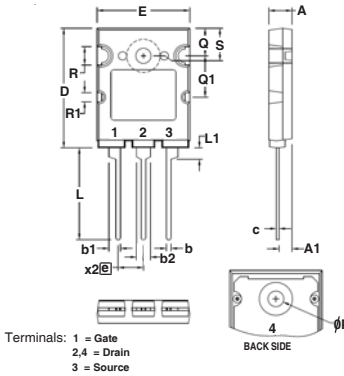

Terminals: 1 = Gate
2,4 = Drain
3 = Source

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.185	.209	4.70	5.30
A1	.102	.118	2.60	3.00
b	.035	.049	0.90	1.25
b1	.091	.106	2.30	2.70
b2	.110	.126	2.80	3.20
c	.020	.033	0.50	0.85
D	1.012	1.035	25.70	26.30
E	.776	.799	19.70	20.30
e	.215BSC		5.46 BSC	
L	.768	.807	19.50	20.50
L1	.091	.106	2.30	2.70
ØP	.122	.138	3.10	3.50
Q	.228	.244	5.80	6.20
Q1	.346	.362	8.80	9.20
ØR	.150	.165	3.80	4.20
ØR1	.071	.087	1.80	2.20
S	.228	.244	5.80	6.20

PLUS 247™ Outline

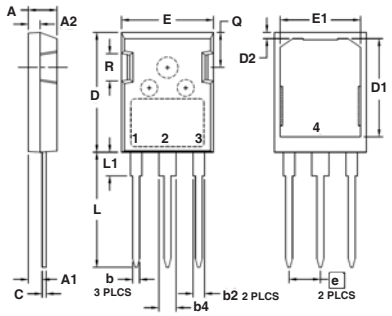

Terminals: 1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b2	.075	.087	1.91	2.20
b4	.115	.126	2.92	3.20
C	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
D1	.650	.690	16.51	17.53
D2	.035	.050	0.89	1.27
E	.620	.635	15.75	16.13
E1	.520	.560	13.08	14.22
e	.215 BSC		5.45 BSC	
L	.780	.810	19.81	20.57
L1	.150	.170	3.81	4.32
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

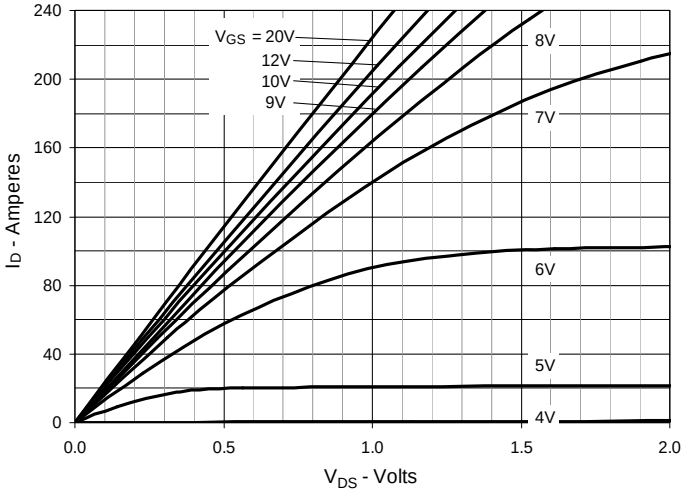


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

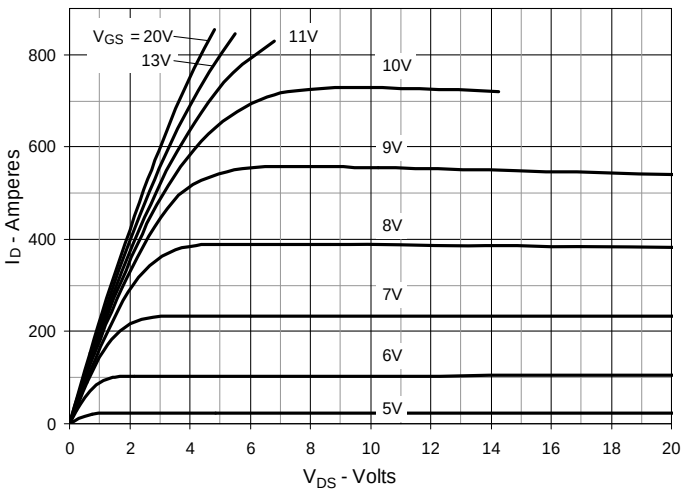


Fig. 3. Output Characteristics @ T_J = 125ºC

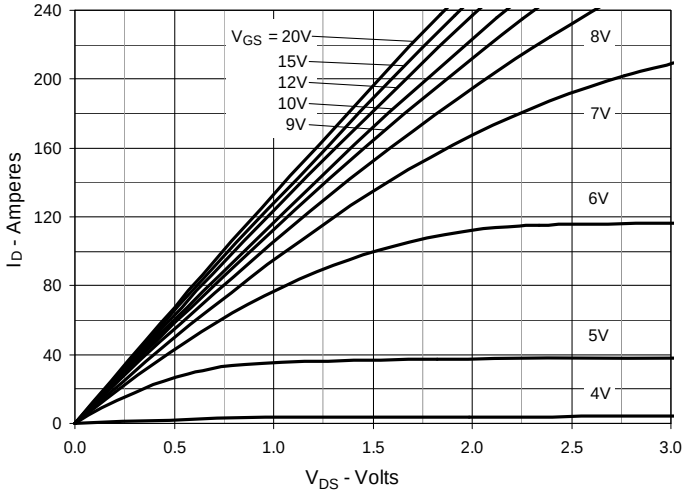


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 120A Value vs. Junction Temperature

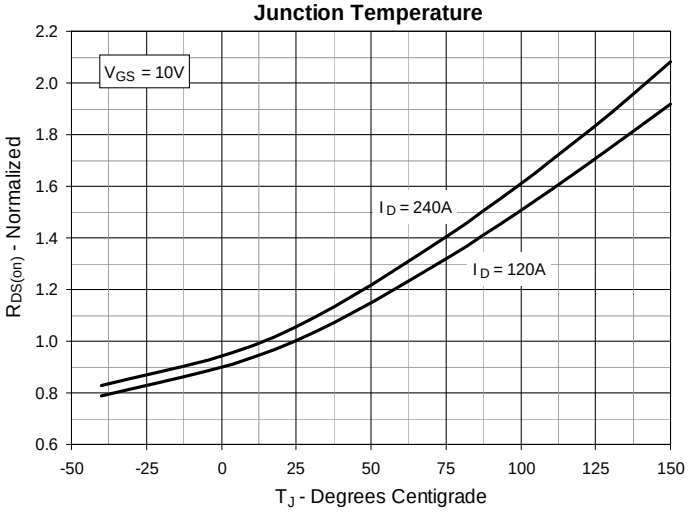


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 120A Value vs. Drain Current


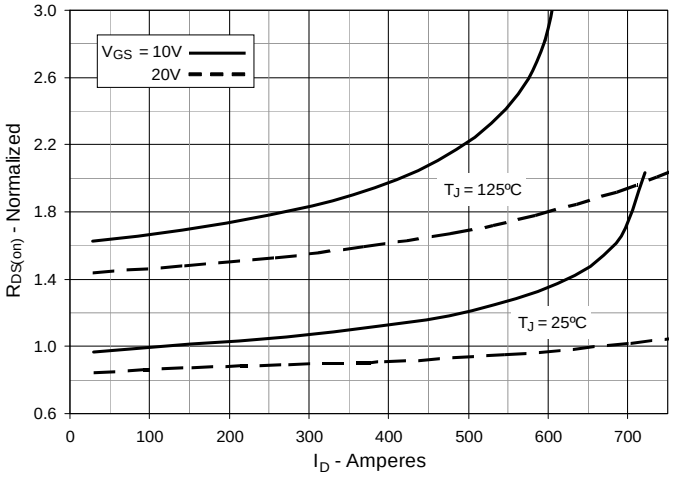


Fig. 6. Maximum Drain Current vs. Case Temperature

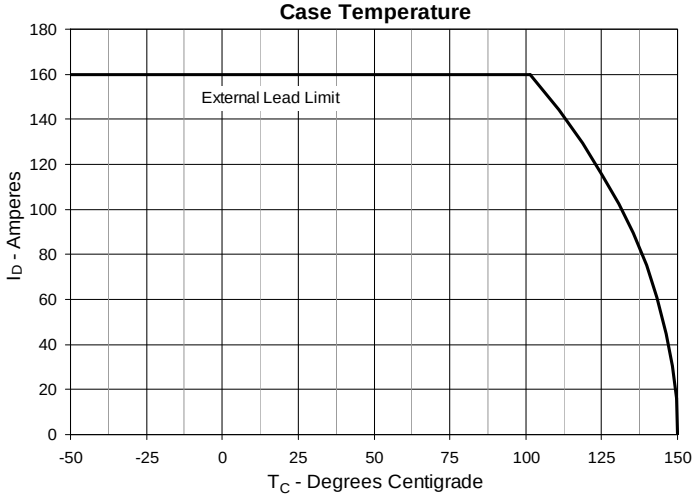

© 2016 IXYS CORPORATION, All rights reserved

Fig. 7. Input Admittance

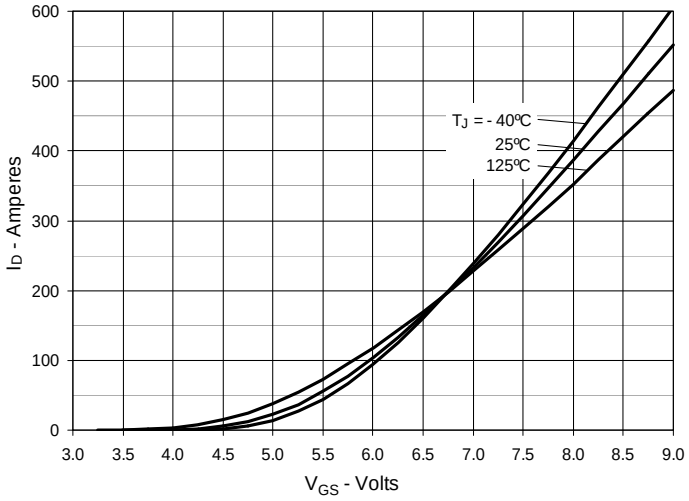


Fig. 8. Transconductance

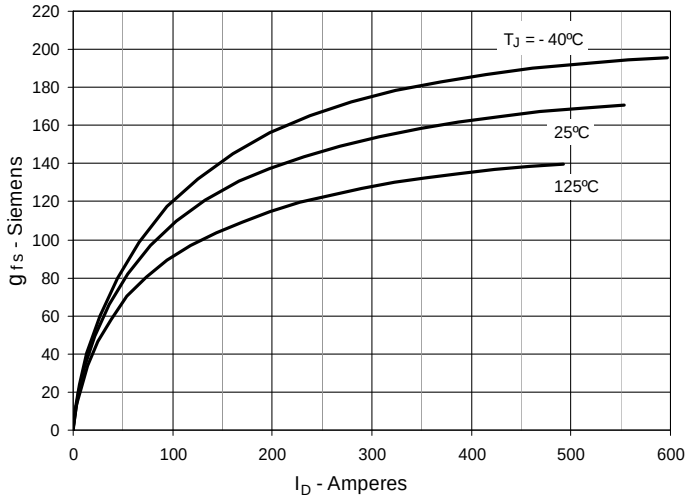


Fig. 9. Forward Voltage Drop of Intrinsic Diode

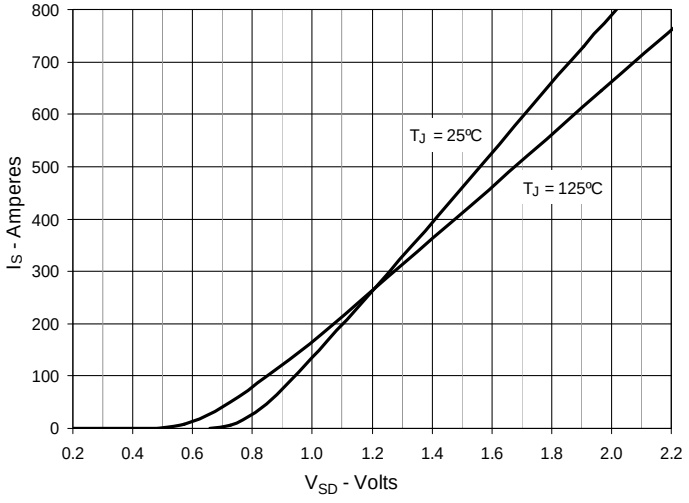


Fig. 10. Gate Charge

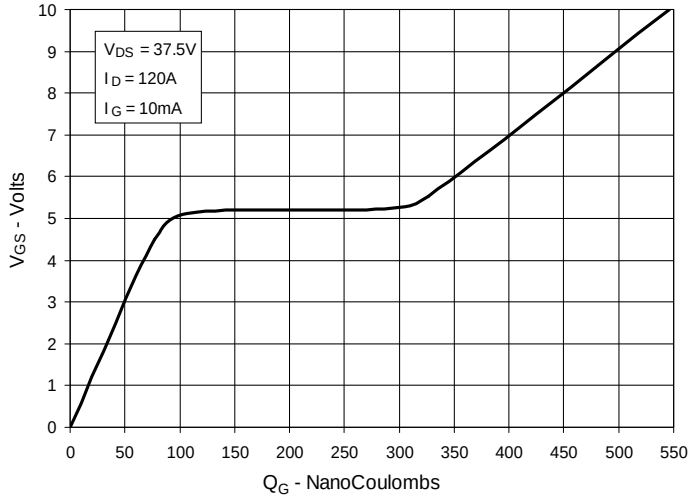


Fig. 11. Capacitance


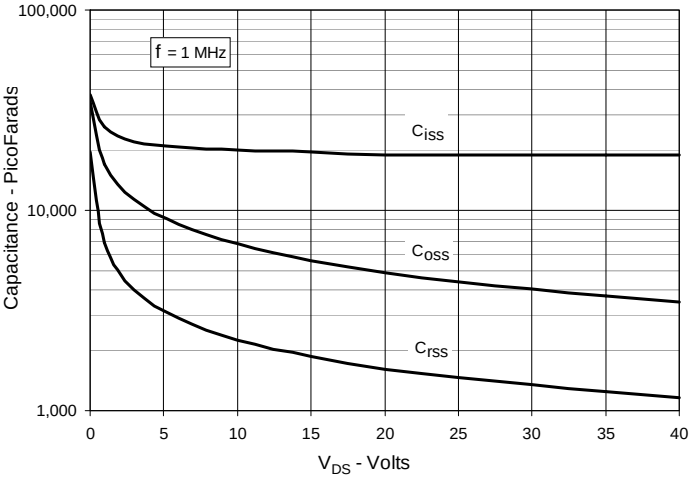


Fig. 12. Maximum Transient Thermal Impedance

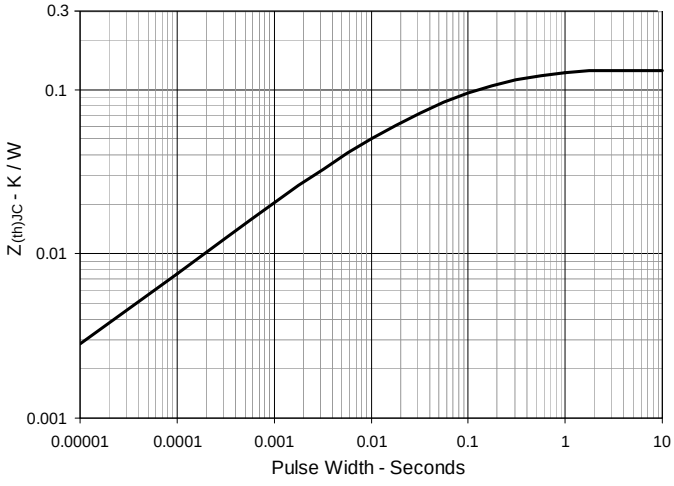

IXYS reserves the right to change limits, test conditions, and dimensions.

Fig. 13. Forward-Bias Safe Operating Area @ T_C = 25ºC


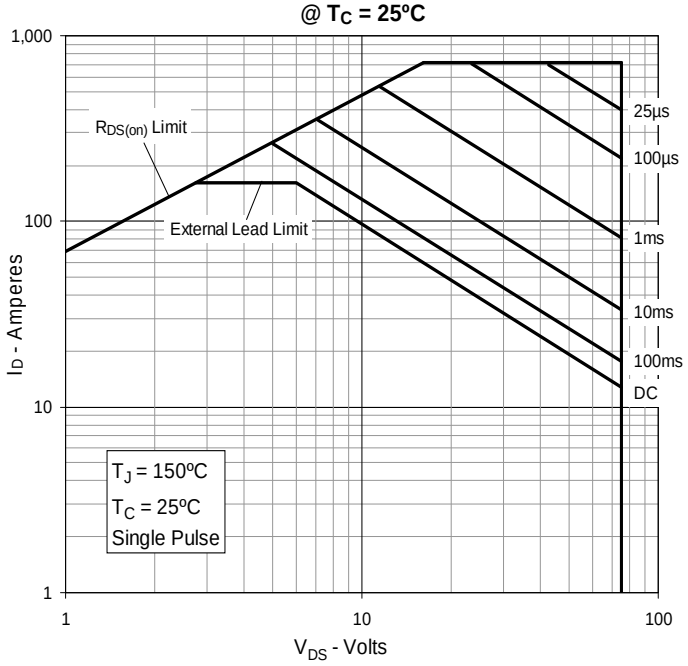


Fig. 14. Forward-Bias Safe Operating Area @ T_C = 75ºC



© 2016 IXYS CORPORATION, All rights reserved

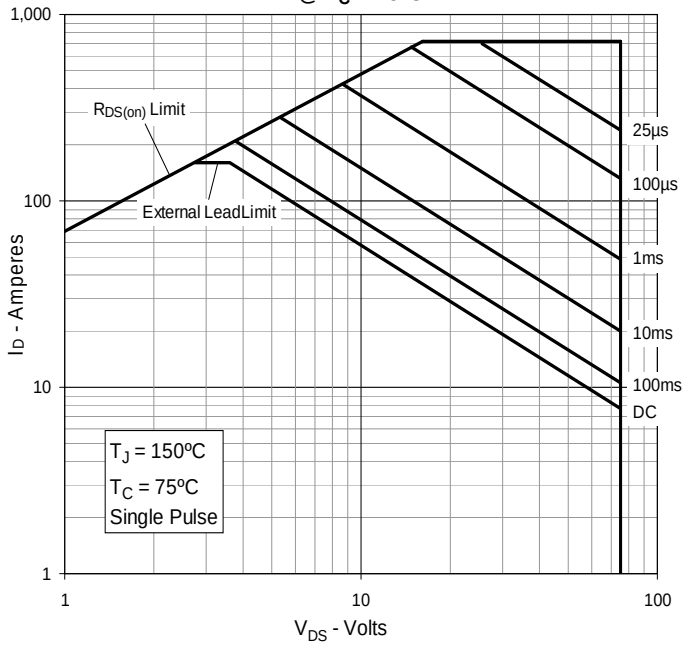

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.