


SIZE	QTY	SYM	PLTD
95	5	+	PLTD
15	9	X	PLTD
70	2	□	NPLTD


REVISIONS		
REV	DESCRIPTION	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISHED.
THICKNESS .062 +/- .006 TOTAL OF 2 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM.
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER.
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

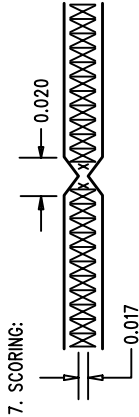

FAB DRAWING

APPROVALS					1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
	INIT	DATE				
DRAWN						
CHECK						
DESIGN	JUNE WU	12/9/02	TITLE: LTC4210-1CS6, Single Channel 5V Hot Swap Controller			
ENGR	ERIC T.	12/9/02				
			SIZE	A	DC628A	REV. A
SCALE = NONE			DES-250042		SHT 1 of 1	