IXYS


Advance Technical Information

X3-Class HiPerFET™ Power MOSFET


IXFK400N15X3
IXFX400N15X3

V_{DSS} = 150V
I_{D25} = 400A
$R_{DS(on)}$ ≤ 3mΩ


N-Channel Enhancement Mode
Avalanche Rated



TO-264 (IXFK)



PLUS247 (IXFX)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	150	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	150	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	400	A
$I_{L(RMS)}$	External Lead Current Limit	160	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	900	A
I_A	T_C = 25°C	200	A
E_{AS}	T_C = 25°C	3.5	J
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	20	V/ns
P_D	T_C = 25°C	1250	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
M_d	Mounting Torque (TO-264)	1.13/10	Nm/lb.in
F_C	Mounting Force (PLUS247)	20..120 /4.5..27	N/lb
Weight	TO-264	10	g
	PLUS247	6	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 3mA	150			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 8mA	2.5		4.5	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			25	μA
	T_J = 125°C			1.5	mA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1			3	mΩ

Features

- International Standard Packages
- Low $R_{DS(ON)}$ and Q_G
- Avalanche Rated
- Low Package Inductance

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

© 2017 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	85	145	S
R_{Gi}	Gate Input Resistance		2.15	Ω
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		23.7	nF
C_{oss}			3730	PF
C_{rss}			140	pF
	Effective Output Capacitance			
$C_{o(er)}$	Energy related; V_{GS} = 0V		2200	pF
$C_{o(tr)}$	Time related; V_{DS} = 0.8 • V_{DSS}		5330	pF
$t_{d(on)}$	**Resistive Switching Times**		36	ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		30	ns
$t_{d(off)}$	R_G = 1Ω (External)		210	ns
t_f			19	ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		365	nC
Q_{gs}			103	nC
Q_{gd}			87	nC
R_{thJC}				0.10 °C/W
R_{thCS}			0.15	°C/W

Source-Drain Diode


Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
I_S	V_{GS} = 0V			400	A
I_{SM}	Repetitive, pulse Width Limited by T_{JM}			1600	A
V_{SD}	I_F = 100A, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 150A, -di/dt = 100A/μs		132		ns
Q_{RM}	V_R = 100V		580		nC
I_{RM}			8.8		A

Note 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.


TO-264 Outline

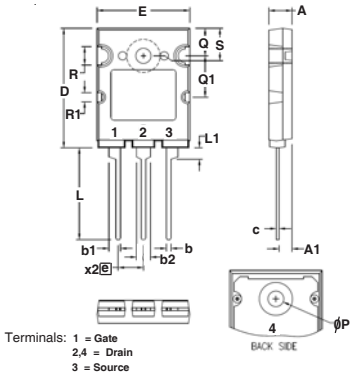

Terminals: 1 = Gate
2,4 = Drain
3 = Source

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.185	.209	4.70	5.30
A1	.102	.118	2.60	3.00
b	.035	.049	0.90	1.25
b1	.091	.106	2.30	2.70
b2	.110	.126	2.80	3.20
c	.020	.033	0.50	0.85
D	1.012	1.035	25.70	26.30
E	.776	.799	19.70	20.30
e	.215BSC		5.46 BSC	
L	.768	.807	19.50	20.50
L1	.091	.106	2.30	2.70
ØP	.122	.138	3.10	3.50
Q	.228	.244	5.80	6.20
Q1	.346	.362	8.80	9.20
ØR	.150	.165	3.80	4.20
ØR1	.071	.087	1.80	2.20
S	.228	.244	5.80	6.20

PLUS 247™ Outline

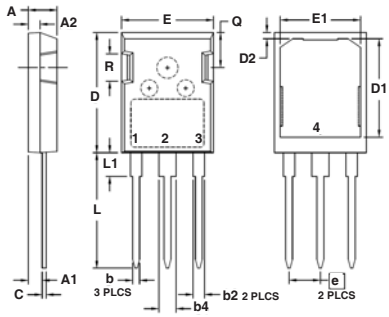

Terminals: 1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b2	.075	.087	1.91	2.20
b4	.115	.126	2.92	3.20
C	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
D1	.650	.690	16.51	17.53
D2	.035	.050	0.89	1.27
E	.620	.635	15.75	16.13
E1	.520	.560	13.08	14.22
e	.215 BSC		5.45 BSC	
L	.780	.810	19.81	20.57
L1	.150	.170	3.81	4.32
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123B1 6,306,728B1 6,404,065B1 6,534,343 6,583,505 6,683,344 6,710,405B2 6,710,463 6,727,585 6,759,692 6,771,478B2 7,005,734B2 7,063,975B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25°C

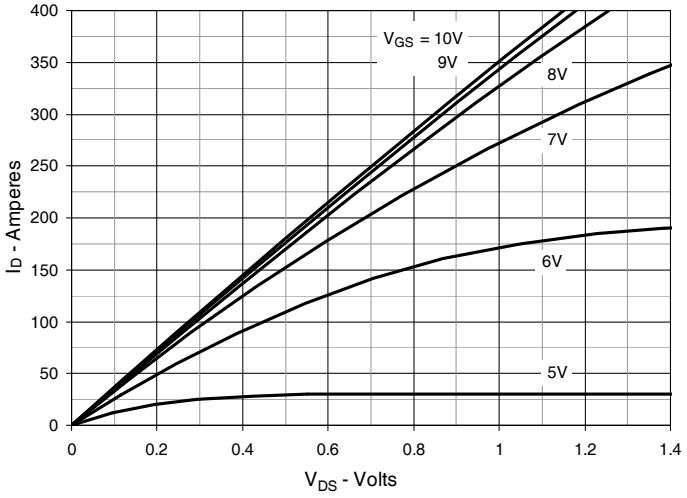


Fig. 2. Extended Output Characteristics @ T_J = 25°C

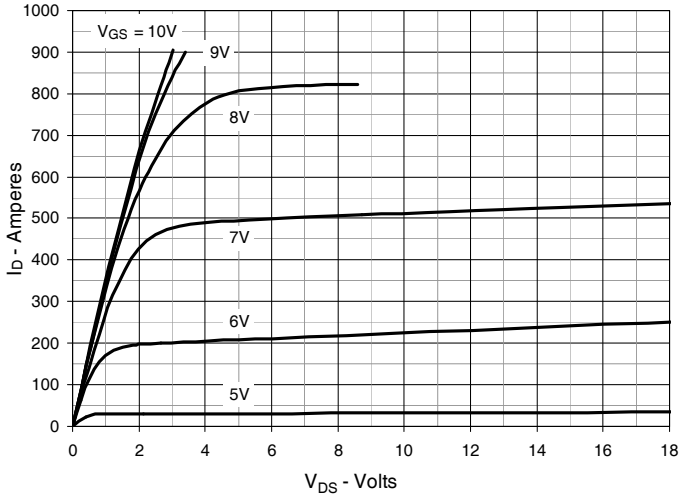


Fig. 3. Output Characteristics @ T_J = 125°C

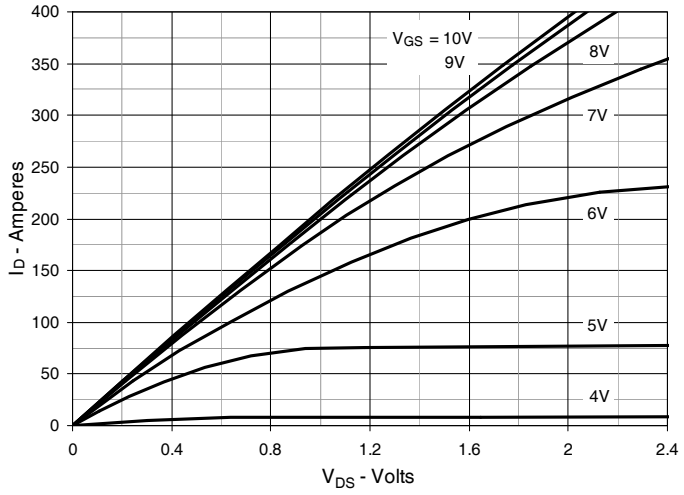


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 200A Value vs. Junction Temperature

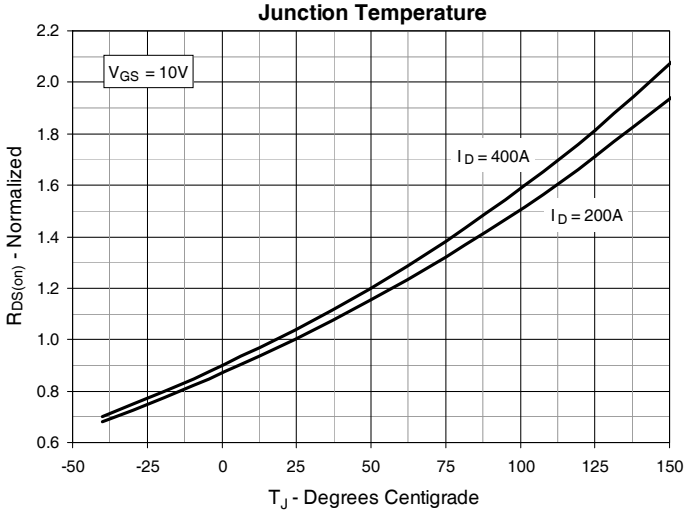


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 200A Value vs. Drain Current


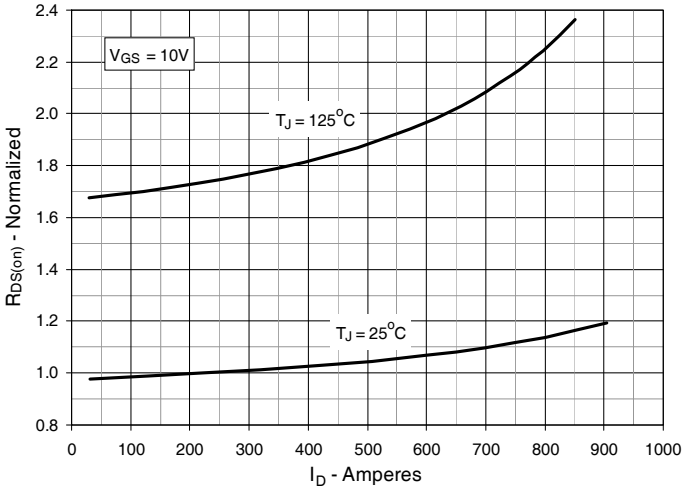


Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature

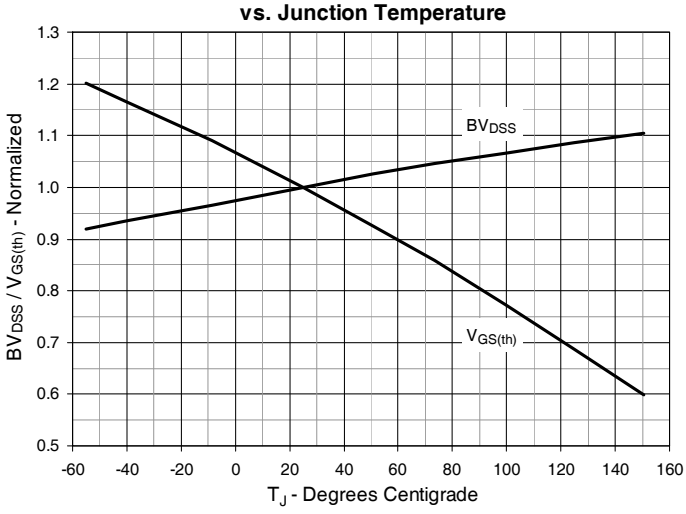

© 2017 IXYS CORPORATION, All Rights Reserved

Fig. 7. Maximum Drain Current vs. Case Temperature

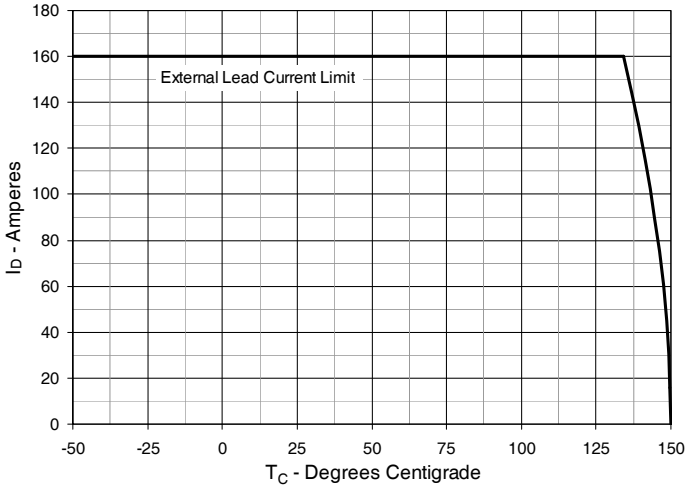


Fig. 8. Input Admittance

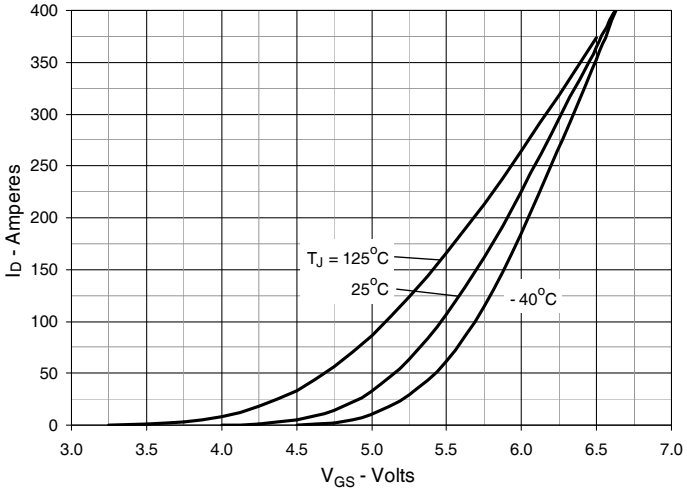


Fig. 9. Transconductance

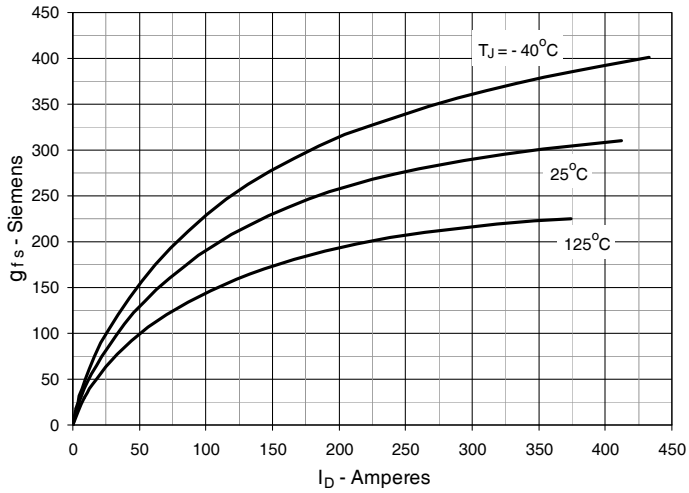


Fig. 10. Forward Voltage Drop of Intrinsic Diode

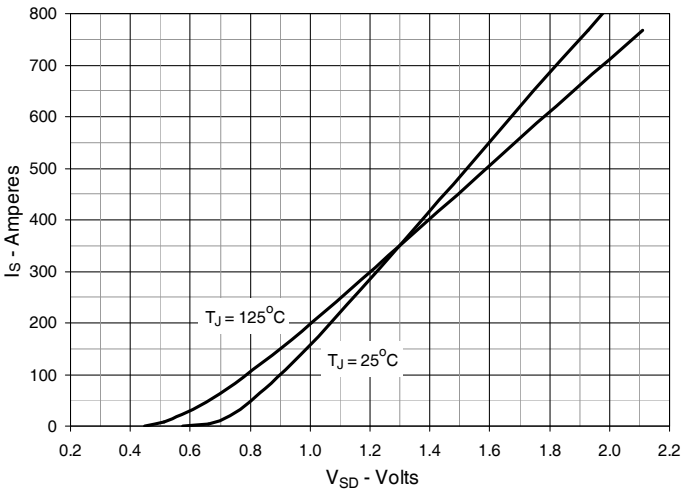


Fig. 11. Gate Charge


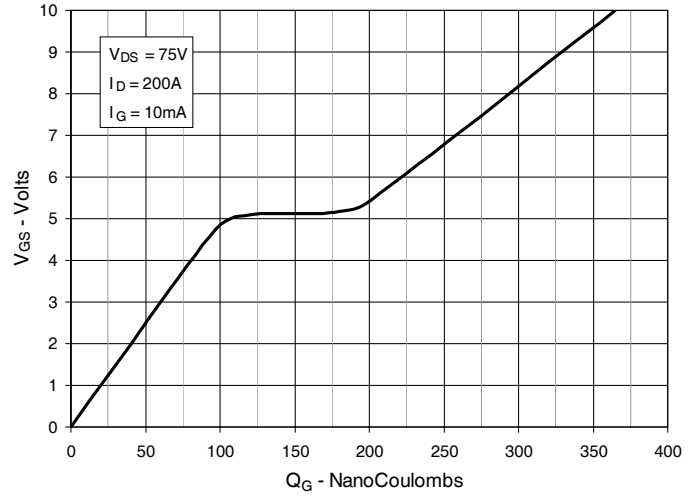


Fig. 12. Capacitance

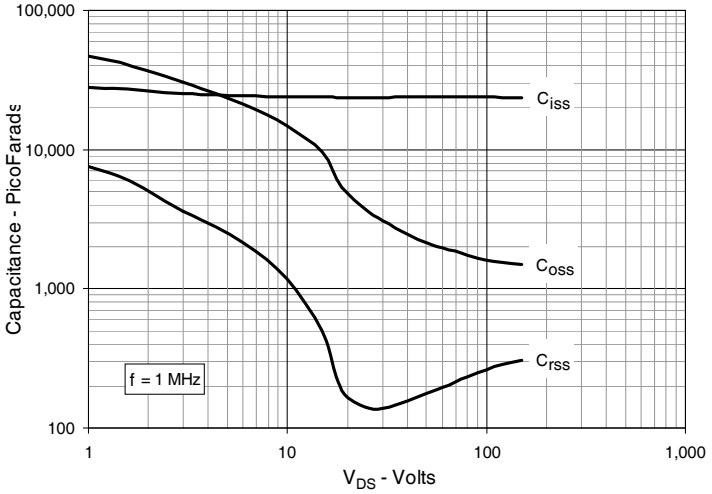

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Output Capacitance Stored Energy

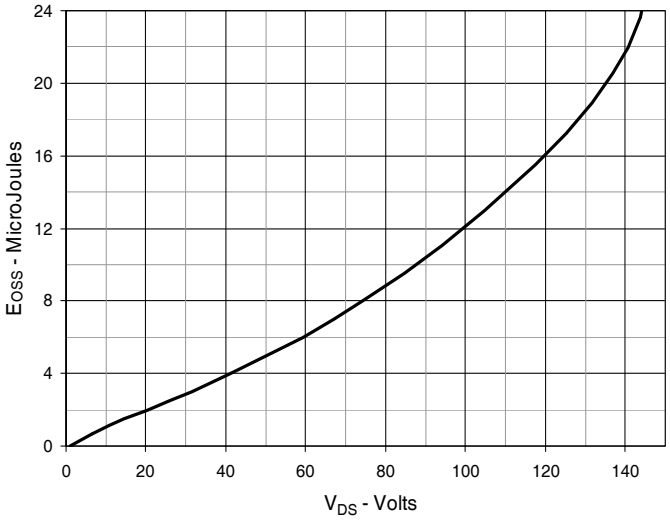


Fig. 14. Forward-Bias Safe Operating Area


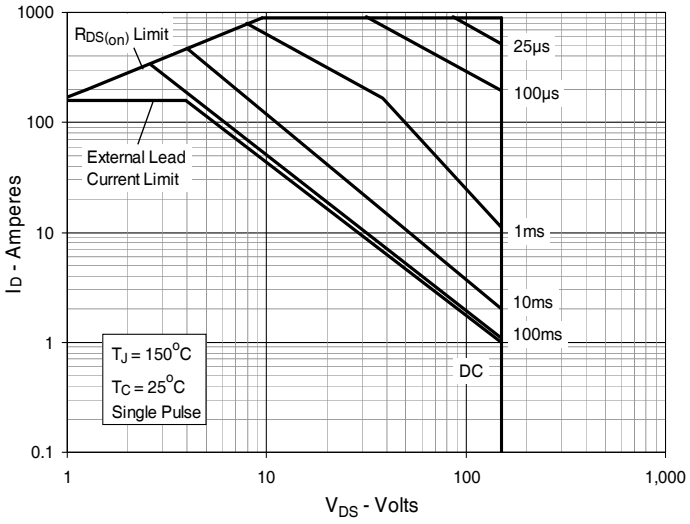


Fig. 15. Maximum Transient Thermal Impedance



© 2017 IXYS CORPORATION, All Rights Reserved

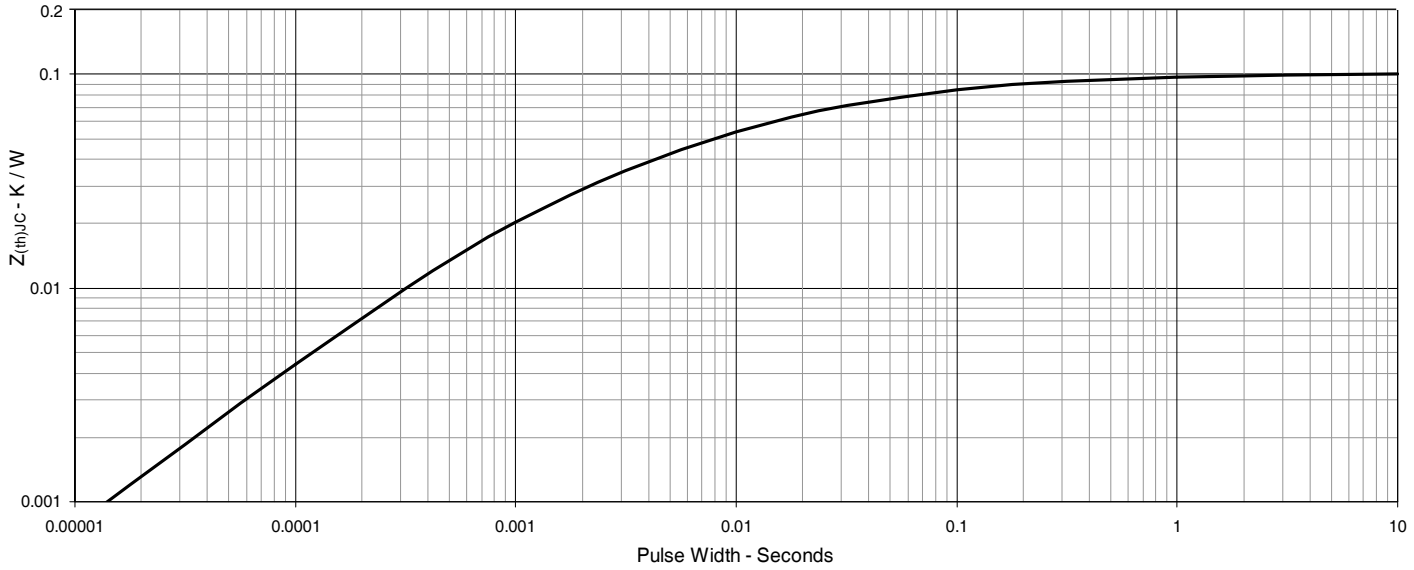

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.