
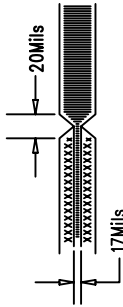


REVISIONS		
REV	APPR	DATE


NOTES: UNLESS OTHERWISE SPECIFIED:

- ARTWORK P/N Demo Circuit 1088A
- FAB PER IPC-A-600. 4-Layers.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
.062 +/- .005 INCH THICKNESS WITH 1 OZ.
COPPER FINISH ON TWO OUTER LAYERS AND
1 OZ. COPPER ON TWO INTERNAL LAYERS.
FLAMABILITY RATING: 94 V-2 MINIMUM .
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
- BOARD: SELECTIVE PLATED BOARD. SOLDER
MASK OVER BARE COPPER, COLOR, GREEN LPI.
WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.
SILKSCREEN COMPONENT SIDE WITH WHITE NON-
CONDUCTIVE INK.
PLATE THRU ALL HOLES WITH COPPER
MIN. PLATING THICKNESS: 1 OZ. EXCEPT
WHERE PLATING NOT REQUIRED
- DRILL: ALL HOLES SHALL BE DRILLED +/- .003 INCH
WITH RESPECT TO CTR. OF DRILLED PAD.
ALL HOLES FINISHED SIZE AFTER PLATING.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- SCORING:

- DO NOT ALTER SOLDER MASK MAINTAIN .0005 (1/2 MIL) CLEARANCE
ON SMT PADS.

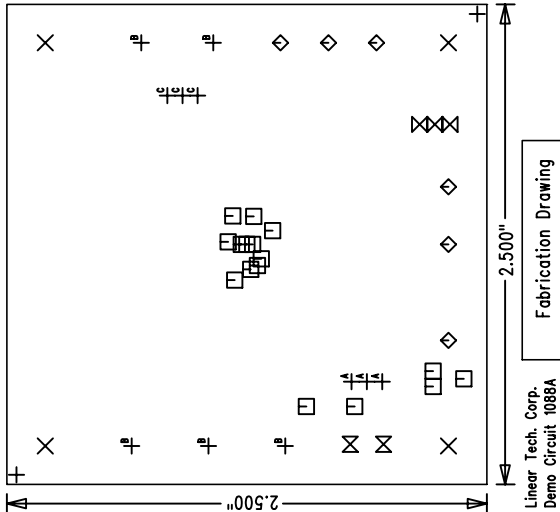

SIZE	QTY	SYM	PLATED	TOL
0.07	2	+	NO	+/- .003
0.19	4	X	YES	+/- .003
0.01	16	□	YES	+/- .003
0.063	6	◇	YES	+/- .003
0.031	3	⊗	YES	+/- .003
0.035	2	⊗	NO	+/- .003
0.035	3	⊗	YES	+/- .003
0.094	5	⊗	YES	+/- .003
0.0311	3	⊗	YES	+/- .003

Fabrication Drawing

APPROVALS		 LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK	N/C	1/25/07			
ENGR	MM				
TITLE: Dual Input Standalone Li-Ion Charger					
SIZE: NONE			REV. A		
SCALE = NONE			DES-23xxxx		
			SHT 1 of 1		