

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 938

MICROPOWER SYNCHRONOUS BUCK-BOOST DC/DC CONVERTER

LTC3530

DESCRIPTION

Demonstration circuit 938 is a micropower synchronous buck-boost converter based on the LTC3530 monolithic buck-boost regulator. The DC938 has an input voltage range of 1.8 V to 5.5V and an output of 3.3V @ 500mA. The converter can work under manual or programmable automatic burst mode, providing high conversion efficiency over a wide range of load currents. The LTC3530 comes in a 10 lead 3×3

DFN package. These features make the DC938 demo board an ideal circuit for use in Li-Ion and dual cell AA (Alkaline/NiCad/NiMH) battery-powered, hand-held applications.


Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

QUICK START PROCEDURE


Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Start with Load set to 0A.
2. Set Power Supply to ~ 3Vin
3. The Load can be set from 0 – 500mA.
4. Vin can be adjusted between 1.8V and 5.5V (note however, max output current is lower than 500mA at Vin below 2.2V).

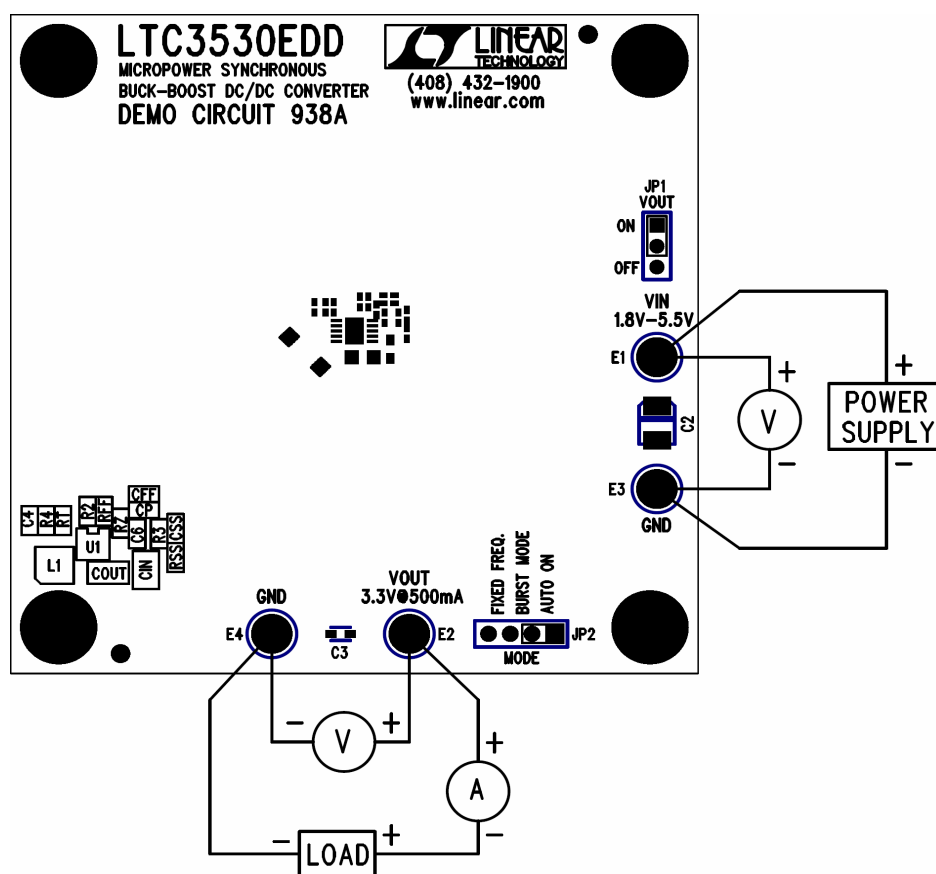

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 938

MICROPOWER SYNCHRONOUS BUCK-BOOST DC/DC CONVERTER

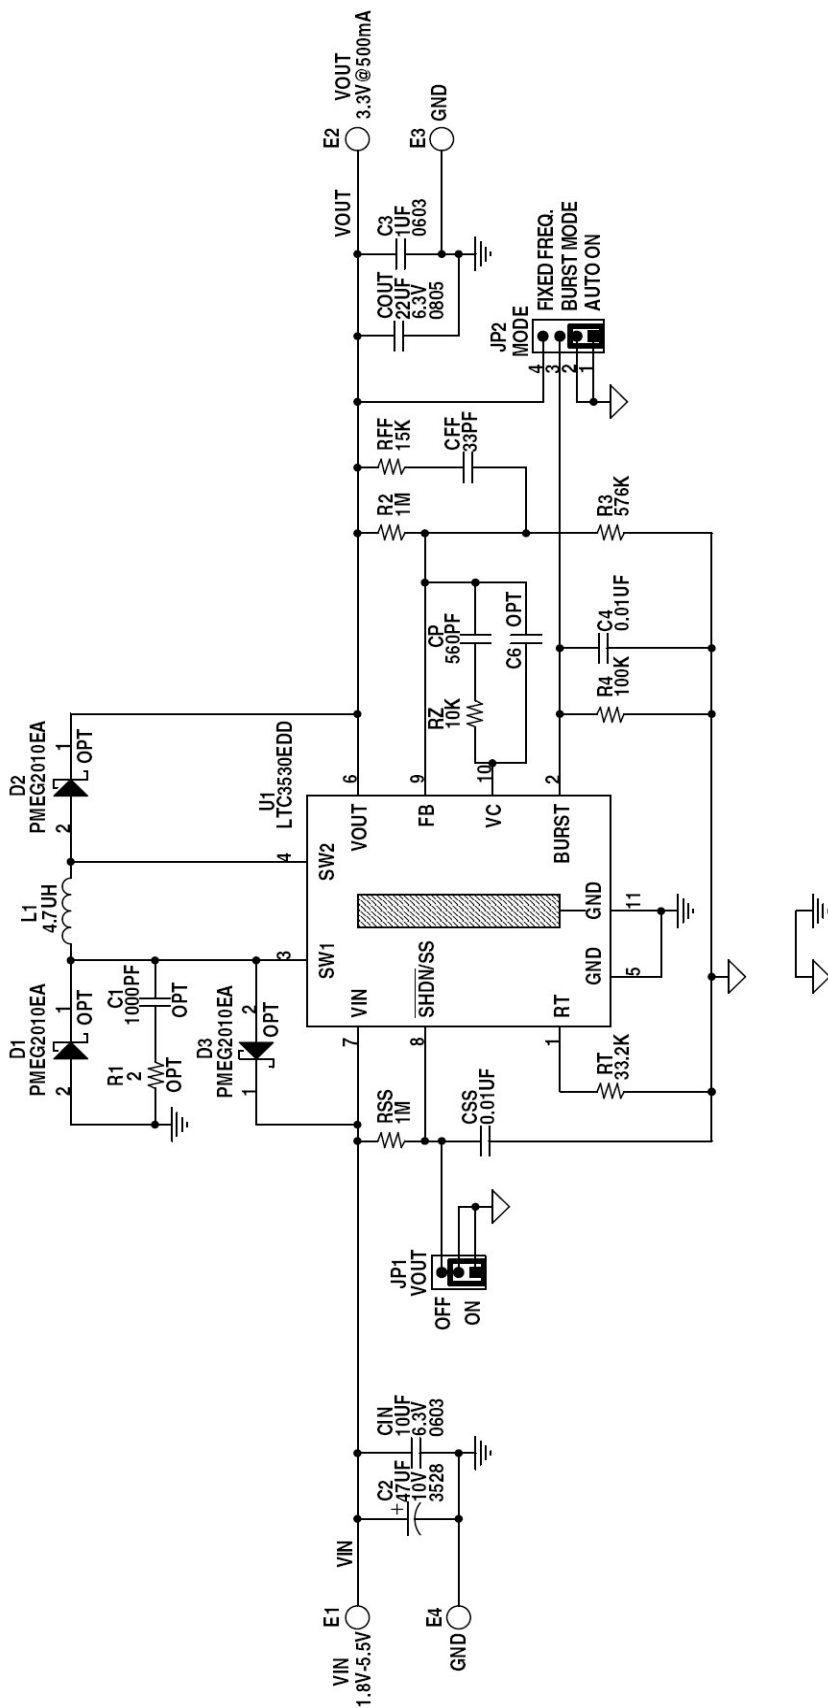

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

LINEAR
TECHNOLOGY

1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507
LTC Confidential-For Customer Use Only

CONTRACT NO.

APPROVALS

DRAWN:

CHECKED:

APPROVED:

ENGINEER: DAVID C.

DESIGNER: KIM T.

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL RESISTORS ARE IN OHMS, 0402.
2. ALL CAPACITORS ARE IN MICROFARADS, 0402.
3. INSTALL SHUNTS ON JP1-JP2 PIN 1 AND 2.

SIZE
A

DWG NO.

DC938A-1 * LTC3530EDD

REV

A

DATE: Thursday, June 21, 2007

SHEET 1 OF 1