



# ST1S12XX

## ST1S12XX12, ST1S12XX18

Synchronous rectification with enable, 0.7 A, 1.7 MHz fixed or adjustable step-down switching regulator in TSOT23-5L

### Features

- Step-down current mode PWM (1.7 MHz) DC-DC converter
- 3% DC output voltage tolerance
- Synchronous rectification
- Fixed output voltage 1.2 V, 1.8 V, and ADJ (available on request 1.5 V, 2.5 V and 3.3 V)
- Enable function
- Internal soft start
- Typical efficiency: > 90%
- 0.7 A output current capability
- Not switching quiescent current: max 650  $\mu$ A over temperature range
- $R_{DS(on)}$  typ. 250 m $\Omega$  and 400 m $\Omega$
- Uses tiny capacitors and inductors
- Operative junction temp. -40 °C to 125 °C
- Available in TSOT23-5L package



guaranteed by the current mode PWM topology and by the use of low ESR SMD ceramic capacitors. The device is thermally protected and the current is limited to prevent damage due to accidental short-circuit. The ST1S12 is available in the TSOT23-5L package.

### Description

The ST1S12 is a step down DC-DC converter optimized for powering low-voltage digital cores in HDD applications and, generally, to replace the high current linear solution when the power dissipation may cause high heating of the application environment. It provides up to 0.7 A over an input voltage range of 2.5 V to 5.5 V. A high switching frequency (1.7 MHz) allows the use of tiny surface-mount components. In addition to the resistor divider to set the output voltage value, only an inductor and two capacitors are required. Moreover, a low output ripple is

**Table 1. Device summary**


| Part numbers | Order codes | Package   |
|--------------|-------------|-----------|
| ST1S12XX     | ST1S12GR    | TSOT23-5L |
| ST1S12XX12   | ST1S12G12R  | TSOT23-5L |
| ST1S12XX18   | ST1S12G18R  | TSOT23-5L |

## Contents

|          |                                                  |           |
|----------|--------------------------------------------------|-----------|
| <b>1</b> | <b>Schematic .....</b>                           | <b>3</b>  |
| <b>2</b> | <b>Pin configuration .....</b>                   | <b>4</b>  |
| <b>3</b> | <b>Maximum ratings .....</b>                     | <b>5</b>  |
| <b>4</b> | <b>Electrical characteristics .....</b>          | <b>6</b>  |
| <b>5</b> | <b>Typical application .....</b>                 | <b>9</b>  |
| <b>6</b> | <b>Application notes .....</b>                   | <b>10</b> |
| <b>7</b> | <b>Typical performance characteristics .....</b> | <b>11</b> |
| <b>8</b> | <b>Package mechanical data .....</b>             | <b>15</b> |
| <b>9</b> | <b>Revision history .....</b>                    | <b>19</b> |

# 1 Schematic

Figure 1. Schematic diagram

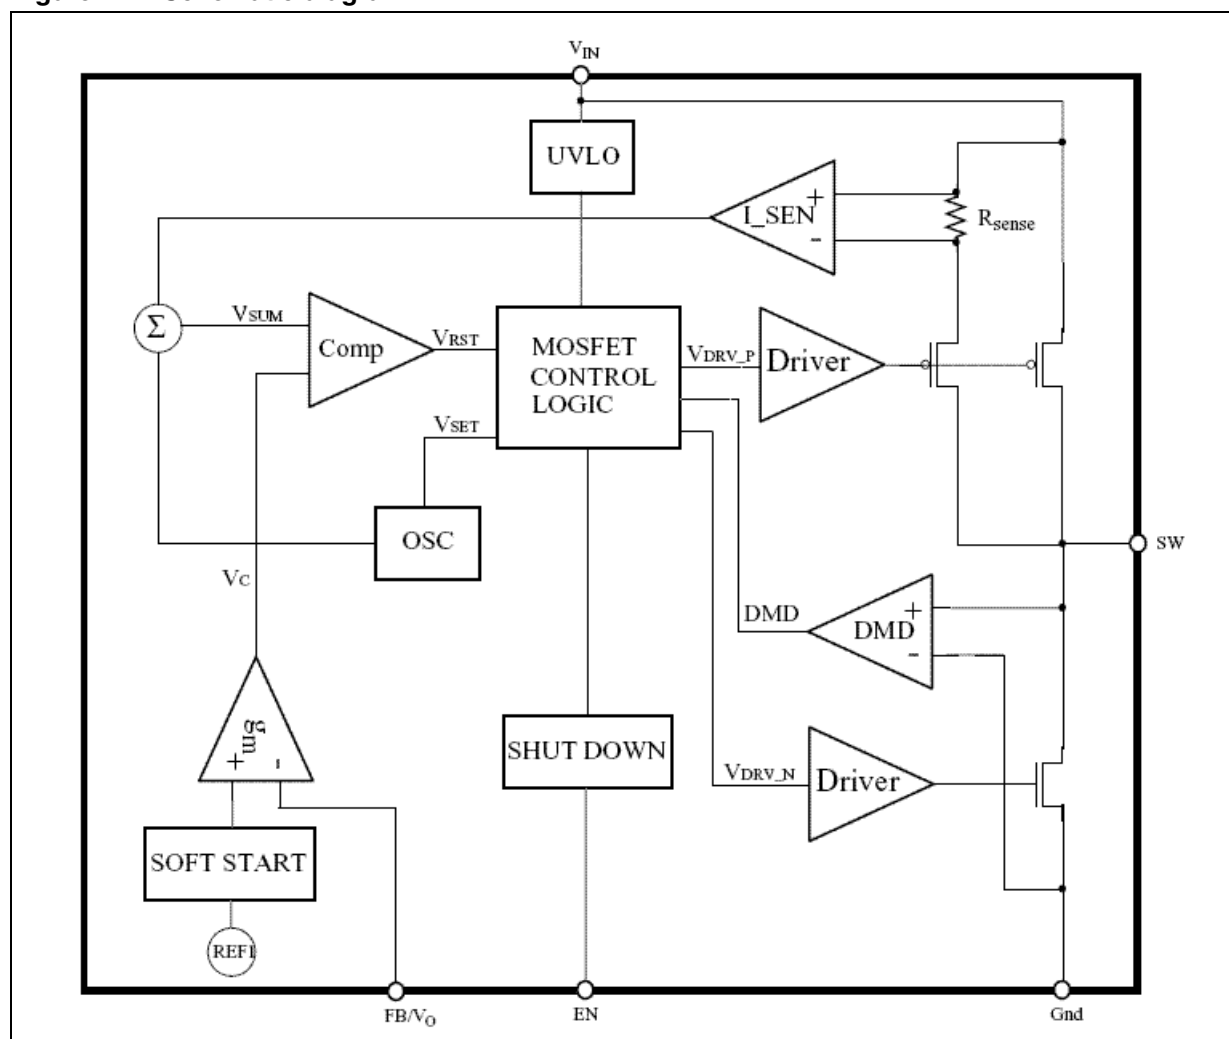

## 2 Pin configuration

Figure 2. Pin connections (top view)

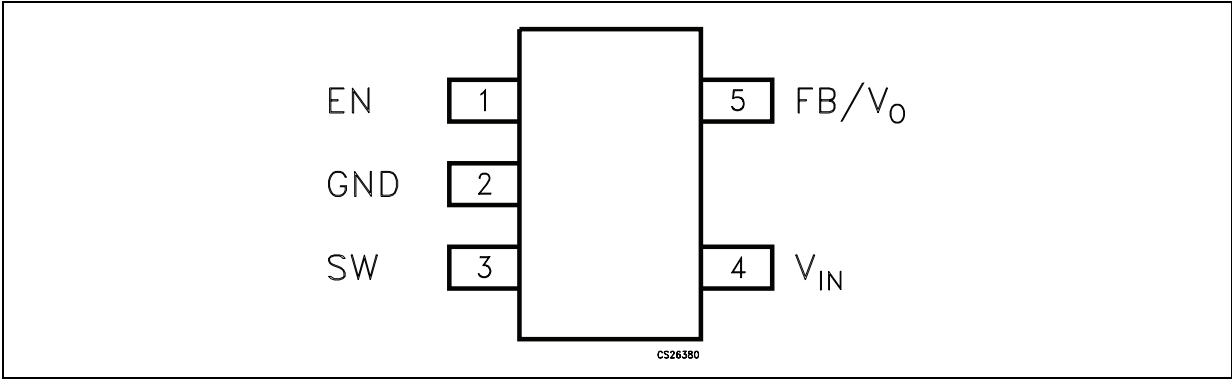


Table 2. Pin description

| Pin n° | Symbol    | Name and function                    |
|--------|-----------|--------------------------------------|
| 1      | EN        | Enable pin                           |
| 2      | GND       | System ground                        |
| 3      | SW        | Switching pin                        |
| 4      | $V_{IN}$  | Input supply pin                     |
| 5      | FB/ $V_O$ | Feedback voltage / or output voltage |

### 3 Maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol         | Parameter                           | Value                  | Unit |
|----------------|-------------------------------------|------------------------|------|
| $V_{IN}$       | Positive power supply voltage       | -0.3 to 6.5            | V    |
| $V_{EN}$       | Enable voltage                      | -0.3 to $V_{IN} + 0.3$ | V    |
| SWITCH Voltage | Max. voltage of output pin          | -0.3 to $V_{IN} + 0.3$ | V    |
| $V_{FB}/V_O$   | Feedback voltage                    | -0.3 to 3              | V    |
| $V_O$          | Output voltage (for $V_O > 1.6$ V)  | -0.3 to 6              | V    |
| $T_J$          | Max junction temperature            | -40 to 150             | °C   |
| $T_{STG}$      | Storage temperature range           | -65 to 150             | °C   |
| $T_{LEAD}$     | Lead temperature (soldering) 10 sec | 260                    | °C   |

*Note:* Absolute maximum ratings are the values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

**Table 4. Thermal data**

| Symbol     | Parameter                           | Value | Unit |
|------------|-------------------------------------|-------|------|
| $R_{thJA}$ | Thermal resistance junction-ambient | 220   | °C/W |
| $R_{thJC}$ | Thermal resistance junction-case    | 110   | °C/W |

**Table 5. ESD performance**

| Symbol | Parameter              | Test conditions | Value | Unit |
|--------|------------------------|-----------------|-------|------|
| ESD    | ESD protection voltage | HBM             | 2     | kV   |
|        |                        | MM              | 0.3   | kV   |

## 4 Electrical characteristics

$V_{IN} = V_{EN} = 3.6\text{ V}$ ,  $C_{IN} = 4.7\text{ }\mu\text{F}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $L = 2.2\text{ }\mu\text{H}$ ,  $T_J = -40\text{ to }125\text{ }^\circ\text{C}$  (unless otherwise specified. Typical values are referred to  $25\text{ }^\circ\text{C}$ ).

**Table 6. Electrical characteristics for ST1S12G**

| Symbol                | Parameter                      | Test conditions                                                                                                                           | Min. | Typ.   | Max.  | Unit                  |
|-----------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------|--------|-------|-----------------------|
| FB                    | Feedback voltage               | $T_J = -40\text{ to }125^\circ\text{C}$                                                                                                   | 582  | 600    | 618   | mV                    |
| $I_{FB}$              | $V_{FB}$ pin bias current      |                                                                                                                                           | -50  |        | 50    | nA                    |
| $V_{IN}$              | Minimum input voltage          | $I_O = 10\text{ mA to }0.7\text{ A}$                                                                                                      | 2.5  |        |       | V                     |
| $I_Q$                 | Quiescent current              | $V_{IN} = V_{EN}$ , $V_{FB} = 0.65\text{ V}$                                                                                              |      | 500    | 650   | $\mu\text{A}$         |
|                       |                                | $V_{EN} = 0$ , $T_J = -40^\circ\text{C to }85^\circ\text{C}$                                                                              |      |        | 1     | $\mu\text{A}$         |
| $I_O$                 | Output current                 | $V_{IN} = 2.5\text{ V to }5.5\text{ V}^{(1)}$                                                                                             | 0.7  |        |       | A                     |
| $V_{EN}$              | Enable threshold               | Device ON, $V_{IN} = 2.5\text{ V to }5.5\text{ V}$                                                                                        | 1.5  |        |       | V                     |
|                       |                                | Device OFF                                                                                                                                |      |        | 0.5   |                       |
| $I_{EN}$              | Enable pin current             |                                                                                                                                           |      |        | 1     | $\mu\text{A}$         |
| $\%V_O/\Delta V_{IN}$ | Reference line regulation      | $V_{IN} = 2.5\text{ V to }5.5\text{ V}^{(1)}$                                                                                             |      | 0.05   | 0.1   | $\%V_O/\Delta V_{IN}$ |
| $\%V_O/\Delta I_O$    | Reference load regulation      | $I_O = 10\text{ mA to }700\text{ mA}^{(1)}$                                                                                               |      | 0.0025 | 0.005 | $\%V_O/\text{mA}$     |
| PWMf <sub>S</sub>     | PWM switching frequency        |                                                                                                                                           | 1.16 | 1.7    | 2.08  | MHz                   |
| D <sub>MAX</sub>      | Maximum duty cycle             |                                                                                                                                           |      |        | 100   | %                     |
| R <sub>DS(on)-N</sub> | NMOS switch on resistance      | $I_{SW} = 100\text{ mA}$                                                                                                                  |      | 0.25   | 0.4   | $\Omega$              |
| R <sub>DS(on)-P</sub> | PMOS switch on resistance      | $I_{SW} = 100\text{ mA}$                                                                                                                  |      | 0.25   | 0.45  | $\Omega$              |
| $I_{SWL}$             | Switching current limitation   | <sup>(1)</sup>                                                                                                                            |      | 1.6    |       | A                     |
| $\eta$                | Efficiency <sup>(1)</sup>      | $I_O = 10\text{ mA to }100\text{ mA}$ , $V_O = 1.8\text{ V}$                                                                              |      | 80     |       | %                     |
|                       |                                | $I_O = 100\text{ mA to }0.7\text{ A}$ , $V_O = 1.8\text{ V}$                                                                              |      | 90     |       |                       |
| T <sub>SHDN</sub>     | Thermal shutdown               |                                                                                                                                           | 130  | 150    |       | $^\circ\text{C}$      |
| T <sub>HYS</sub>      | Thermal shutdown hysteresis    |                                                                                                                                           |      | 15     |       | $^\circ\text{C}$      |
| $\%V_O/\Delta I_O$    | Load transient response        | $I_O = 100\text{ mA to }700\text{ mA}$ , $T_A = 25^\circ\text{C}$<br>$t_R = t_F \geq 200\text{ ns}$ , $C_O = 22\text{ }\mu\text{F}^{(1)}$ | -5   |        | +5    | $\%V_O$               |
| $\%V_O/\Delta I_O$    | Short circuit removal response | $I_O = 10\text{ mA to }I_{O=short}$ ,<br>$T_A = 25^\circ\text{C}^{(1)}$                                                                   | -10  |        | +10   | $\%V_O$               |

1. Guaranteed by design, but not tested in production.

$V_{IN} = V_{EN} = 3\text{ V}$ ,  $C_{IN} = 4.7\text{ }\mu\text{F}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $L = 2.2\text{ }\mu\text{H}$ ,  $T_J = -40\text{ to }125\text{ }^\circ\text{C}$  (unless otherwise specified. Typical values are referred to  $25\text{ }^\circ\text{C}$ ).

**Table 7. Electrical characteristics for ST1S12G12**

| Symbol                | Parameter                      | Test conditions                                                                                                                                   | Min.  | Typ.   | Max.  | Unit                  |
|-----------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|-------|-----------------------|
| OUT                   | Output feedback pin            | $T_J = -40\text{ to }125\text{ }^\circ\text{C}$                                                                                                   | 1.164 | 1.2    | 1.236 | V                     |
| $I_O$                 | $V_O$ pin bias current         |                                                                                                                                                   |       | 15     | 20    | $\mu\text{A}$         |
| $V_{IN}$              | Minimum input voltage          | $I_O = 10\text{ mA to }0.7\text{ A}$                                                                                                              | 2.5   |        |       | V                     |
| $I_Q$                 | Quiescent current              | $V_{IN} = V_{EN}$ , $V_{FB} = 1.5\text{ V}$                                                                                                       |       | 500    | 650   | $\mu\text{A}$         |
|                       |                                | $V_{EN} = 0$ , $T = -40\text{ }^\circ\text{C to }85\text{ }^\circ\text{C}$                                                                        |       |        | 1     | $\mu\text{A}$         |
| $I_O$                 | Output current                 | $V_{IN} = 2.5\text{ V to }5.5\text{ V}^{(1)}$                                                                                                     | 0.7   |        |       | A                     |
| $V_{EN}$              | Enable threshold               | Device ON, $V_{IN} = 2.5\text{ to }5.5\text{ V}$                                                                                                  | 1.5   |        |       | V                     |
|                       |                                | Device OFF                                                                                                                                        |       |        | 0.5   |                       |
| $I_{EN}$              | Enable pin current             |                                                                                                                                                   |       |        | 1     | $\mu\text{A}$         |
| $\%V_O/\Delta V_{IN}$ | Reference line regulation      | $V_{IN} = 2.5\text{ V to }5.5\text{ V}^{(1)}$                                                                                                     |       | 0.05   | 0.1   | $\%V_O/\Delta V_{IN}$ |
| $\%V_O/\Delta I_O$    | Reference load regulation      | $I_O = 10\text{ mA to }700\text{ mA}^{(1)}$                                                                                                       |       | 0.0025 | 0.005 | $\%V_O/\text{mA}$     |
| $\text{PWMf}_S$       | PWM switching frequency        |                                                                                                                                                   | 1.16  | 1.7    | 2.08  | MHz                   |
| $R_{DS(on)-N}$        | NMOS switch on resistance      | $I_{SW} = 100\text{ mA}$                                                                                                                          |       | 0.25   | 0.4   | $\Omega$              |
| $R_{DS(on)-P}$        | PMOS switch on resistance      | $I_{SW} = 100\text{ mA}$                                                                                                                          |       | 0.25   | 0.45  | $\Omega$              |
| $I_{SWL}$             | Switching current limitation   | <sup>(1)</sup>                                                                                                                                    |       | 1.6    |       | A                     |
| $\eta$                | Efficiency <sup>(1)</sup>      | $I_O = 10\text{ mA to }100\text{ mA}$                                                                                                             |       | 80     |       | %                     |
|                       |                                | $I_O = 100\text{ mA to }0.7\text{ A}$                                                                                                             |       | 85     |       |                       |
| $T_{SHDN}$            | Thermal shutdown               |                                                                                                                                                   | 130   | 150    |       | $^\circ\text{C}$      |
| $T_{HYS}$             | Thermal shutdown hysteresis    |                                                                                                                                                   |       | 15     |       | $^\circ\text{C}$      |
| $\%V_O/\Delta I_O$    | Load transient response        | $I_O = 100\text{ mA to }700\text{ mA}$ , $T_A = 25\text{ }^\circ\text{C}$<br>$t_R = t_F \geq 200\text{ ns}$ , $C_O = 22\text{ }\mu\text{F}^{(1)}$ | -5    |        | +5    | $\%V_O$               |
| $\%V_O/\Delta I_O$    | Short circuit removal response | $I_O = 10\text{ mA to }I_O = \text{short}$ ,<br>$T_A = 25\text{ }^\circ\text{C}^{(1)}$                                                            | -10   |        | +10   | $\%V_O$               |

1. Guaranteed by design, but not tested in production.

$V_{IN} = V_{EN} = 3.6\text{ V}$ ,  $C_{IN} = 4.7\text{ }\mu\text{F}$ ,  $C_O = 10\text{ }\mu\text{F}$ ,  $L = 2.2\text{ }\mu\text{H}$ ,  $T_J = -40\text{ to }125\text{ }^\circ\text{C}$  (unless otherwise specified. Typical values are referred to  $25\text{ }^\circ\text{C}$ ).


**Table 8. Electrical characteristics for ST1S12G18**

| Symbol                | Parameter                      | Test conditions                                                                                                                        | Min.  | Typ.   | Max.  | Unit                  |
|-----------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------|--------|-------|-----------------------|
| OUT                   | Output feedback pin            | $T_J = -40\text{ to }125^\circ\text{C}$                                                                                                | 1.746 | 1.8    | 1.854 | V                     |
| $I_O$                 | $V_O$ pin bias current         |                                                                                                                                        |       | 15     | 20    | $\mu\text{A}$         |
| $V_{IN}$              | Minimum input voltage          | $I_O = 10\text{mA to }0.7\text{A}$                                                                                                     | 2.5   |        |       | V                     |
| $I_Q$                 | Quiescent current              | $V_{IN} = V_{EN}$ , $V_{FB} = 2\text{V}$                                                                                               |       | 500    | 650   | $\mu\text{A}$         |
|                       |                                | $V_{EN} = 0$ , $T_J = -40^\circ\text{C to }85^\circ\text{C}$                                                                           |       |        | 1     | $\mu\text{A}$         |
| $I_O$                 | Output current                 | $V_{IN} = 2.5\text{V to }5.5\text{V}^{(1)}$                                                                                            | 0.7   |        |       | A                     |
| $V_{EN}$              | Enable threshold               | Device ON, $V_I = 2.5\text{V to }5.5\text{V}$                                                                                          | 1.5   |        |       | V                     |
|                       |                                | Device OFF                                                                                                                             |       |        | 0.5   |                       |
| $I_{EN}$              | Enable pin current             |                                                                                                                                        |       |        | 1     | $\mu\text{A}$         |
| $\%V_O/\Delta V_{IN}$ | Reference line regulation      | $V_{IN} = 2.5\text{V to }5.5\text{V}^{(1)}$                                                                                            |       | 0.05   | 0.1   | $\%V_O/\Delta V_{IN}$ |
| $\%V_O/\Delta I_O$    | Reference load regulation      | $I_O = 10\text{mA to }700\text{mA}^{(1)}$                                                                                              |       | 0.0025 | 0.005 | $\%V_O/\text{mA}$     |
| $\text{PWM}f_S$       | PWM switching frequency        |                                                                                                                                        | 1.16  | 1.7    | 2.08  | MHz                   |
| $R_{DS(on)-N}$        | NMOS switch on resistance      | $I_{SW} = 100\text{mA}$                                                                                                                |       | 0.25   | 0.4   | $\Omega$              |
| $R_{DS(on)-P}$        | PMOS switch on resistance      | $I_{SW} = 100\text{mA}$                                                                                                                |       | 0.25   | 0.45  | $\Omega$              |
| $I_{SWL}$             | Switching current limitation   | <sup>(1)</sup>                                                                                                                         |       | 1.6    |       | A                     |
| $\eta$                | Efficiency <sup>(1)</sup>      | $I_O = 10\text{mA to }100\text{mA}$                                                                                                    |       | 80     |       | %                     |
|                       |                                | $I_O = 100\text{mA to }0.7\text{A}$                                                                                                    |       | 90     |       |                       |
| $T_{SHDN}$            | Thermal shutdown               |                                                                                                                                        | 130   | 150    |       | $^\circ\text{C}$      |
| $T_{HYS}$             | Thermal shutdown hysteresis    |                                                                                                                                        |       | 15     |       | $^\circ\text{C}$      |
| $\%V_O/\Delta I_O$    | Load transient response        | $I_O = 100\text{mA to }700\text{mA}$ , $T_A = 25^\circ\text{C}$<br>$t_R = t_F \geq 200\text{ns}$ , $C_O = 22\text{ }\mu\text{F}^{(1)}$ | -5    |        | +5    | $\%V_O$               |
| $\%V_O/\Delta I_O$    | Short circuit removal response | $I_O = 10\text{mA to }I_O = \text{short}$ ,<br>$T_A = 25^\circ\text{C}^{(1)}$                                                          | -10   |        | +10   | $\%V_O$               |

1. Guaranteed by design, but not tested in production.

## 5 Typical application

Figure 3. Application circuit

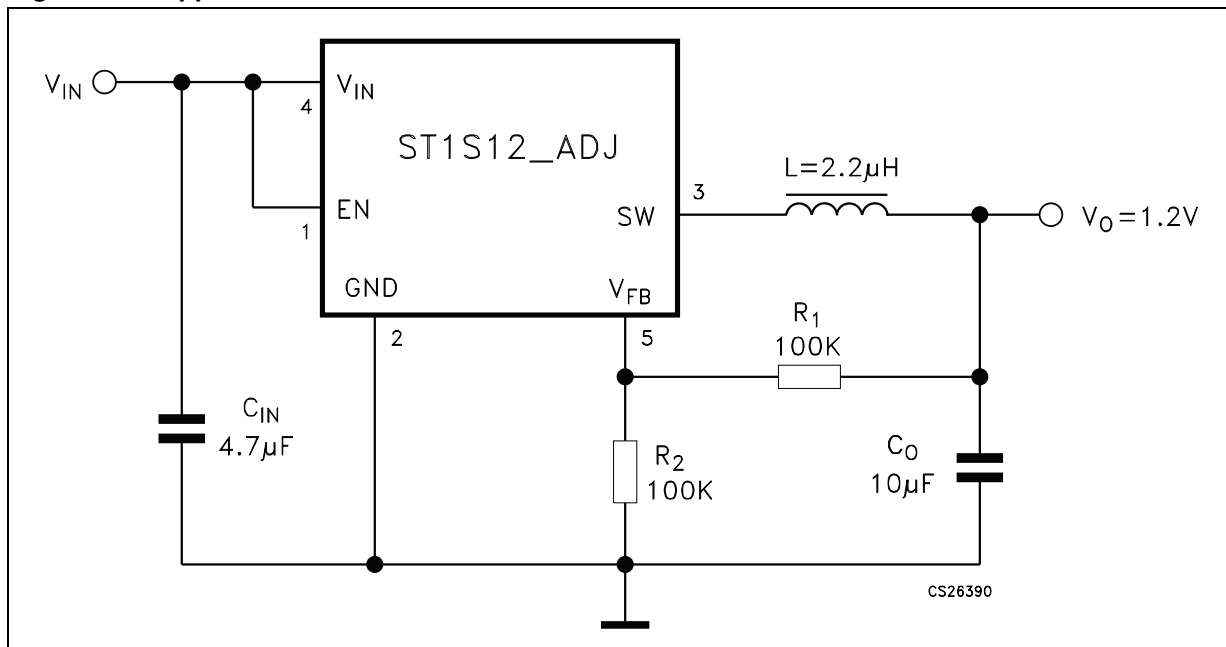

## 6 Application notes

The ST1S12 is an adjustable current mode PWM step-down DC-DC converter with internal 0.7 A power switch, packaged in TSOT23-5L. This device is a complete 0.7 A switching regulator, with its internal compensation eliminating the need for additional components.

Because the ST1S12 an adjustable regulator, the output voltage is determined by an external resistor divider. The desired value is derived by the following equation:

### Equation 1


$$V_O = V_{FB} [1 + R_1 / R_2]$$

For the device to function only a few component are required: an inductor, two capacitors and the resistor divider. The inductor selected must be capable of non saturation at peak current level. Moreover, its value can be selected taking into account that a large inductor value increases efficiency at low output current and reduces output voltage ripple, while a smaller inductor can be used when it is important to reduce package size and the total cost of the application. Finally, the ST1S12 has been designed to work properly with X5R or X7R SMD ceramic capacitors both at the input and at the output. These types of capacitors, due to their very low series resistance (ESR), minimize the output voltage ripple. Other low ESR capacitors can be used according to the need of the application without compromising the correct functioning of the device.


## 7 Typical performance characteristics

Unless otherwise specified, refer to the typical application circuit under the following conditions:  $C_{IN} = 4.7 \mu F$ ,  $C_{OUT} = 10 \mu F$ ,  $L = 2.2 \mu H$


**Figure 4. Voltage feedback vs. temperature**

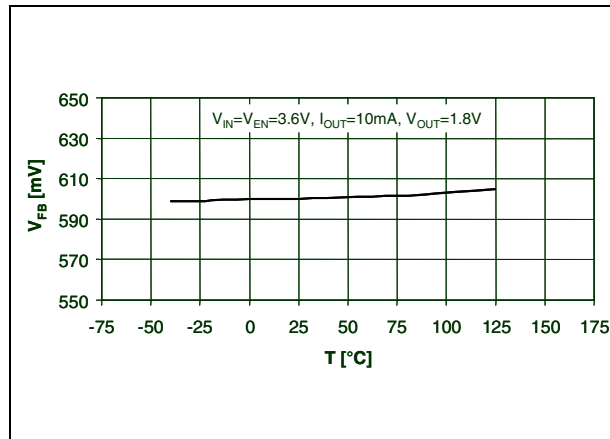


**Figure 5. Drop vs. temperature**

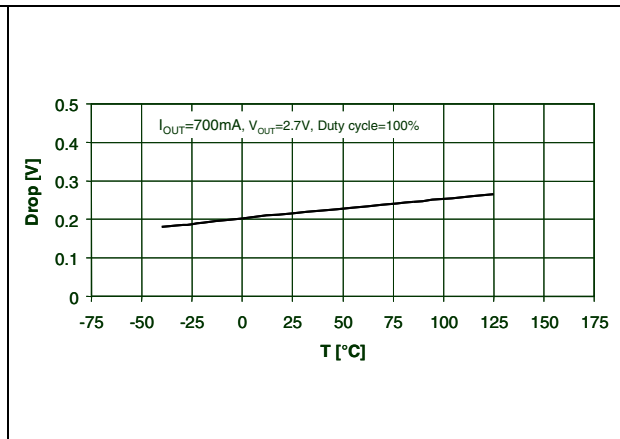


**Figure 6. Oscillator frequency vs. temperature**

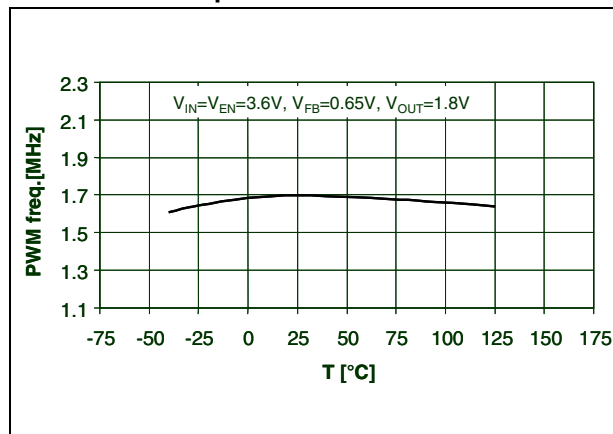

**Figure 7. Efficiency vs. output current**

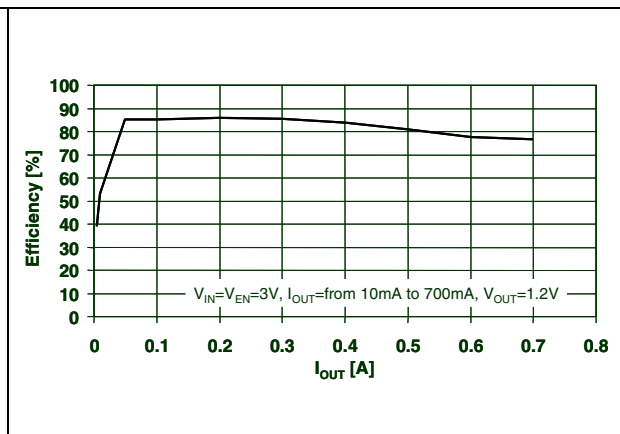

**Figure 8. Efficiency vs. output current**

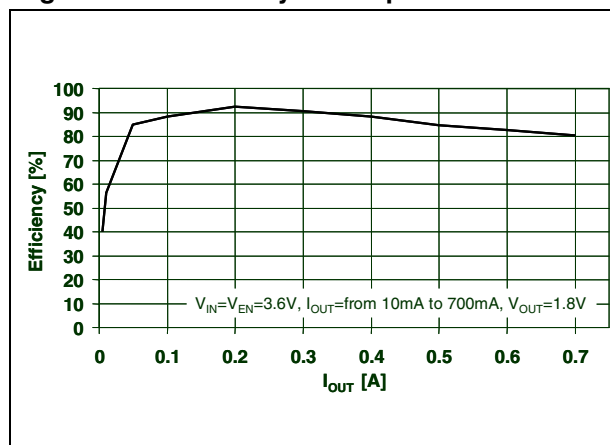

**Figure 9. Efficiency vs. temperature**

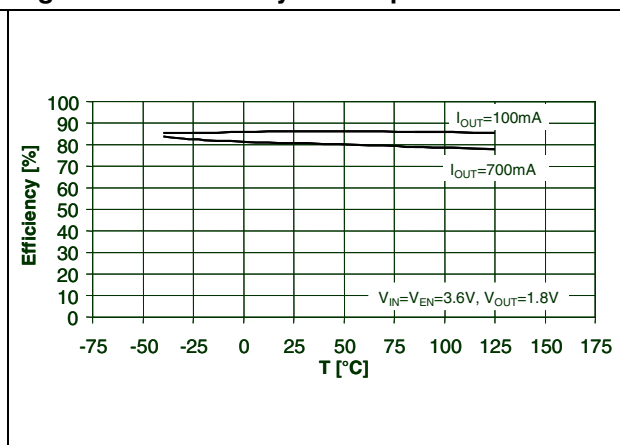


Figure 10. Efficiency vs. temperature

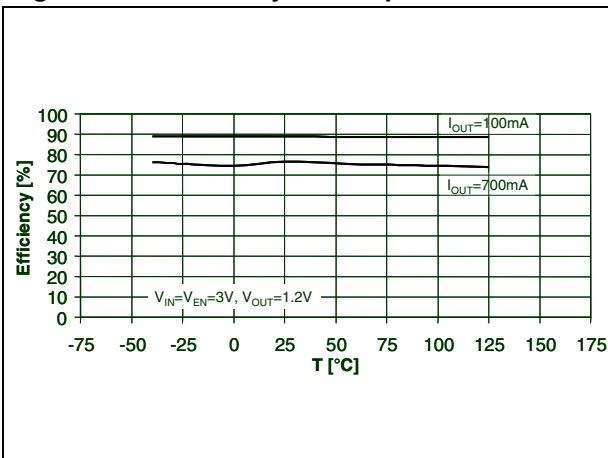


Figure 11. Supply current vs. temperature

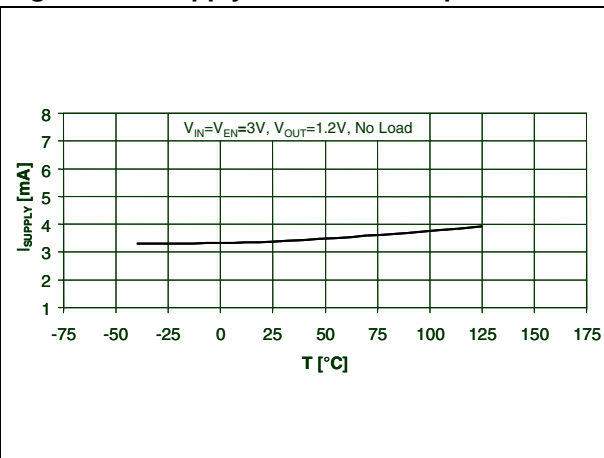


Figure 12. Quiescent current vs. temperature

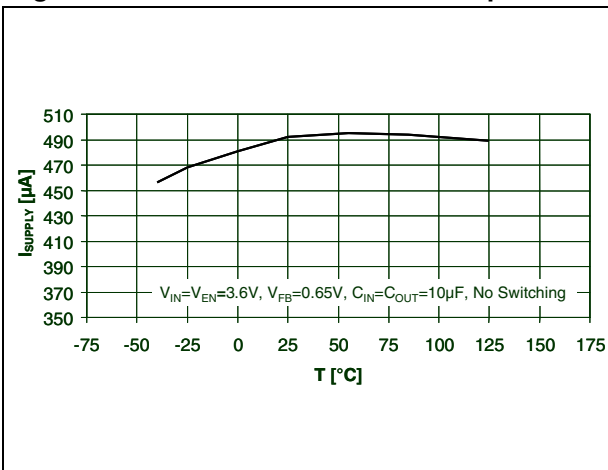


Figure 13. Enable voltage vs. temperature

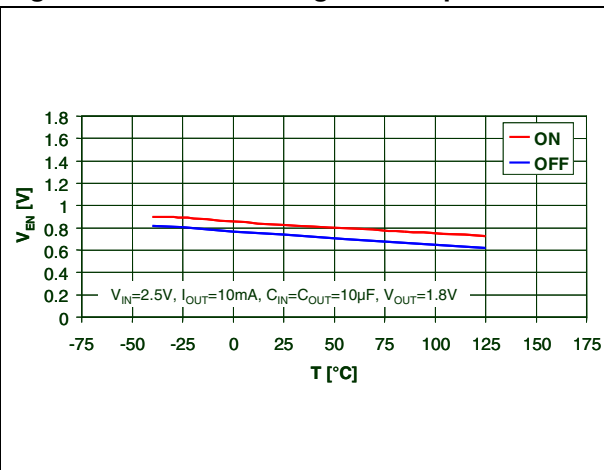


Figure 14. Enable voltage vs. temperature

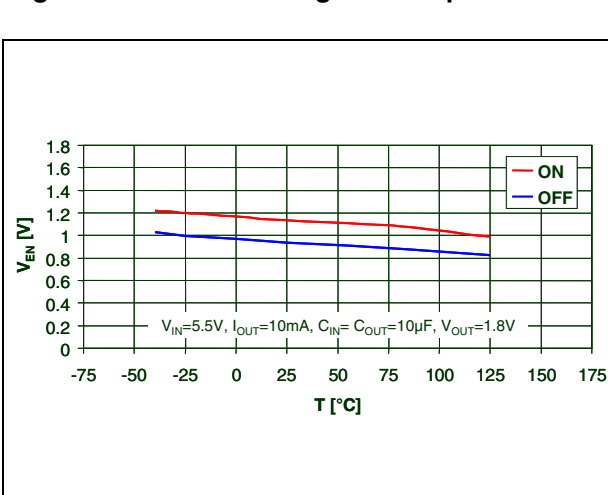


Figure 15. Reference line regulation vs. temperature

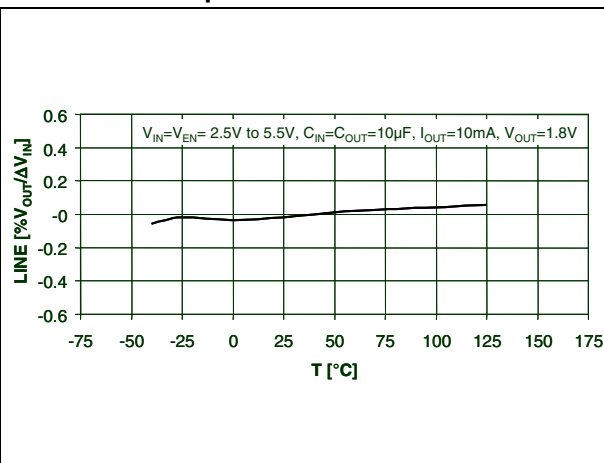


Figure 16. Reference load regulation vs. temperature

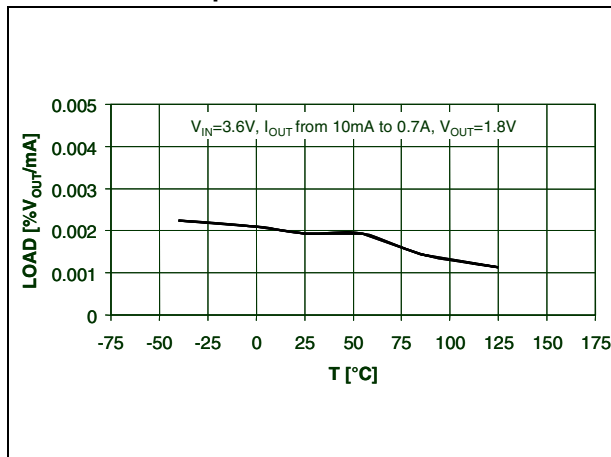


Figure 17. NMOS switch on resistance vs. temperature

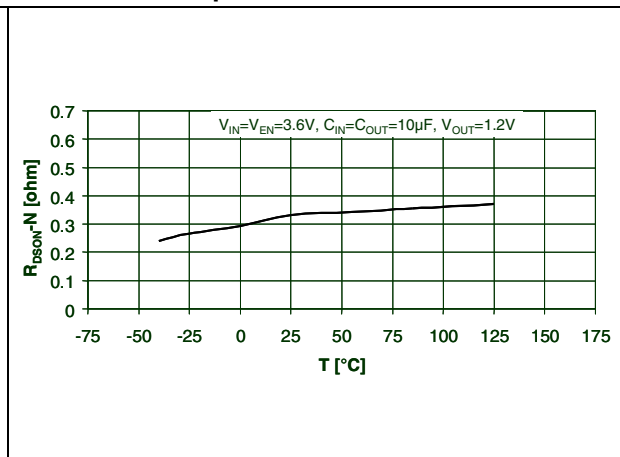


Figure 18. PMOS switch on resistance vs. temperature

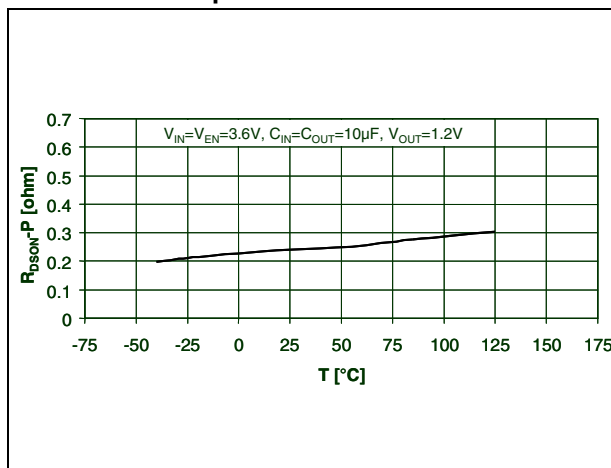


Figure 19. Switching current limitation vs. temperature

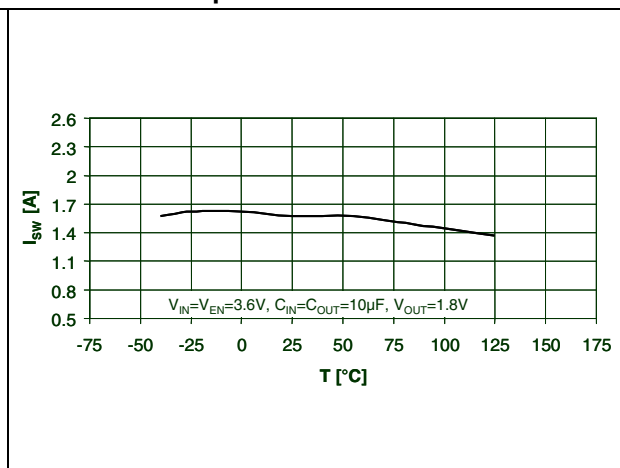


Figure 20. Switching current limitation vs. input voltage

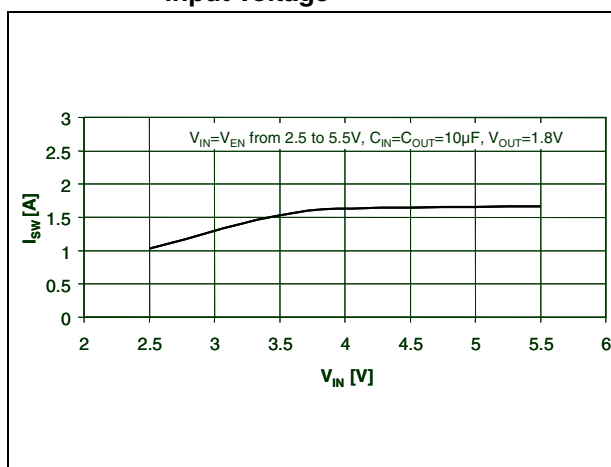


Figure 21. Output voltage vs. input voltage

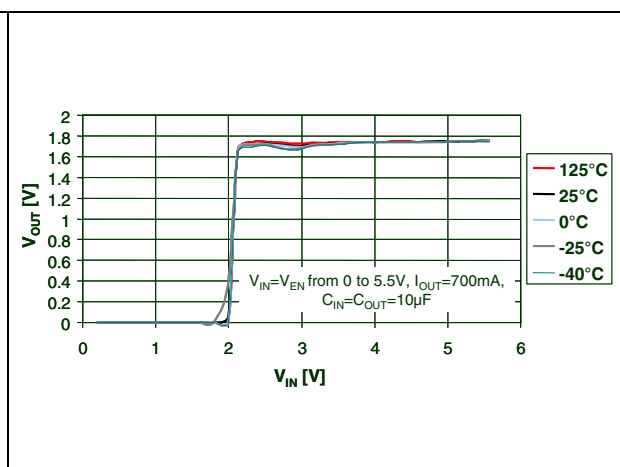


Figure 22. Line transient

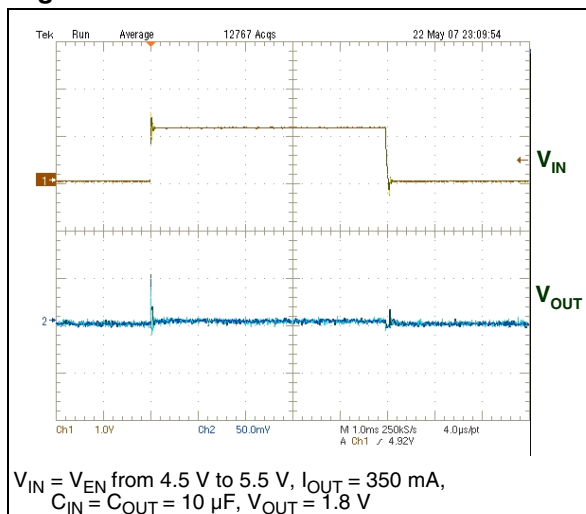


Figure 23. Load transient

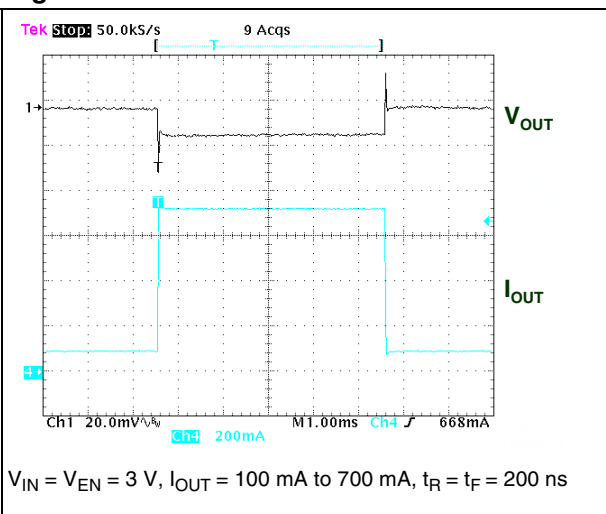


Figure 24. Start-up transient


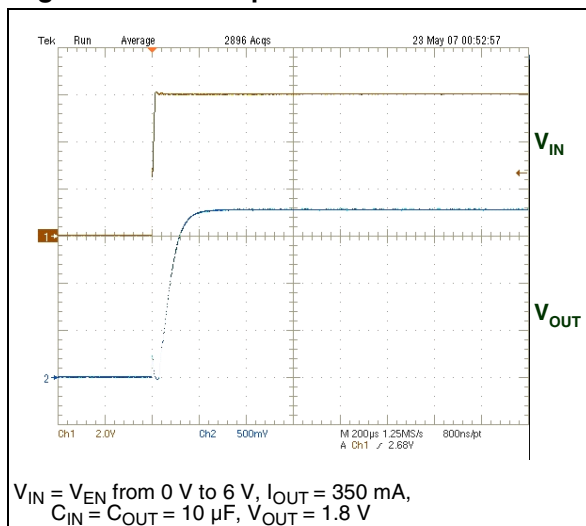


Figure 25. Enable transient

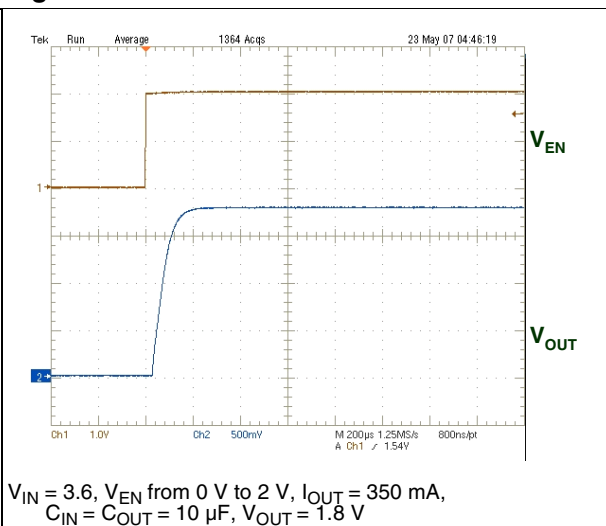


## 8 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.

TSOT23-5L mechanical data

| Dim. | mm.  |      |      | mils. |       |      |
|------|------|------|------|-------|-------|------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max. |
| A    |      |      | 1.1  |       |       | 43.3 |
| A1   | 0    |      | 0.1  |       |       | 3.9  |
| A2   | 0.7  |      | 1.0  | 27.6  |       | 39.4 |
| b    | 0.3  |      | 0.5  | 11.8  |       | 19.7 |
| C    | 0.08 |      | 0.2  | 3.1   |       | 7.9  |
| D    |      | 2.9  |      |       | 114.2 |      |
| E    |      | 2.8  |      |       | 110.2 |      |
| E1   |      | 1.6  |      |       | 63.0  |      |
| e    |      | 0.95 |      |       | 37.4  |      |
| e1   |      | 1.9  |      |       | 74.8  |      |
| L    | 0.3  |      | 0.6  | 11.8  |       | 23.6 |

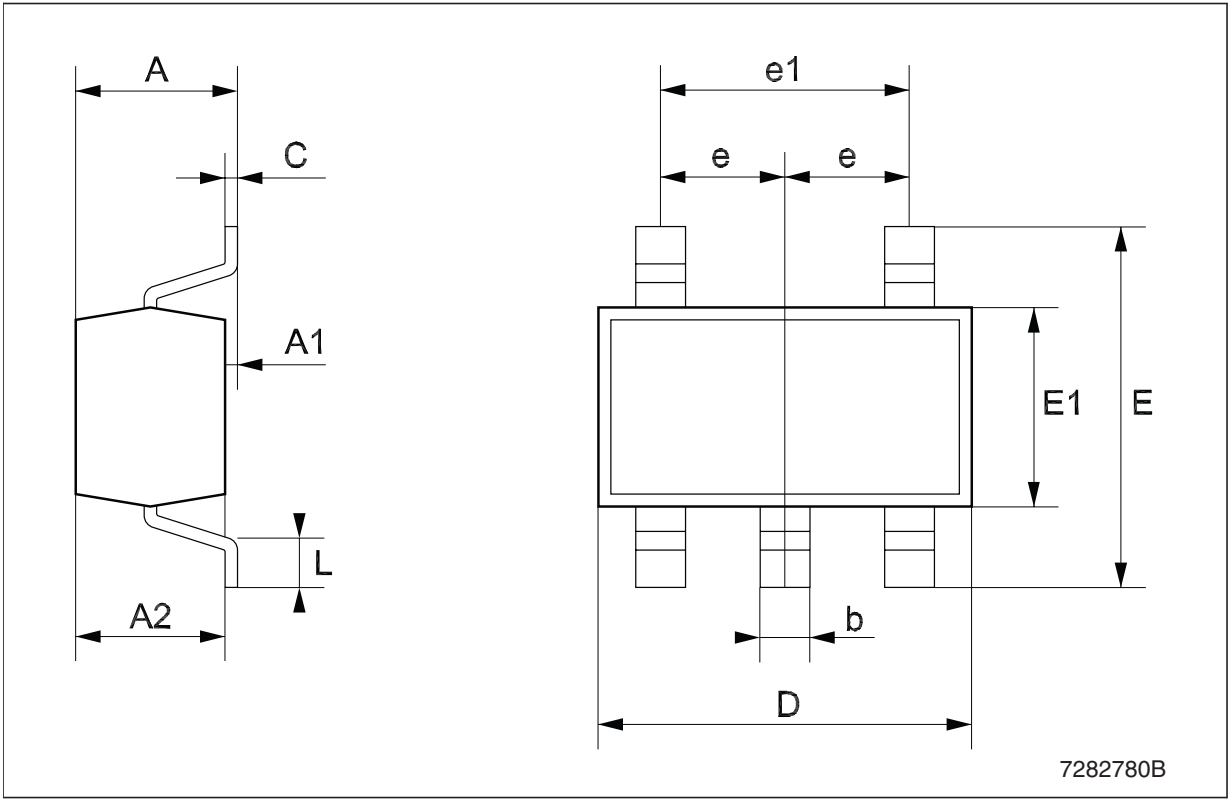

Tape & reel TSOT23-5L mechanical data

| Dim. | mm.  |      |      | inch. |       |       |
|------|------|------|------|-------|-------|-------|
|      | Min. | Typ. | Max. | Min.  | Typ.  | Max.  |
| A    |      |      | 180  |       |       | 7.086 |
| C    | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D    | 20.2 |      |      | 0.795 |       |       |
| N    | 60   |      |      | 2.362 |       |       |
| T    |      |      | 14.4 |       |       | 0.567 |
| Ao   | 3.13 | 3.23 | 3.33 | 0.123 | 0.127 | 0.131 |
| Bo   | 3.07 | 3.17 | 3.27 | 0.120 | 0.124 | 0.128 |
| Ko   | 1.27 | 1.37 | 1.47 | 0.050 | 0.054 | 0.058 |
| Po   | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |
| P    | 3.9  | 4.0  | 4.1  | 0.153 | 0.157 | 0.161 |

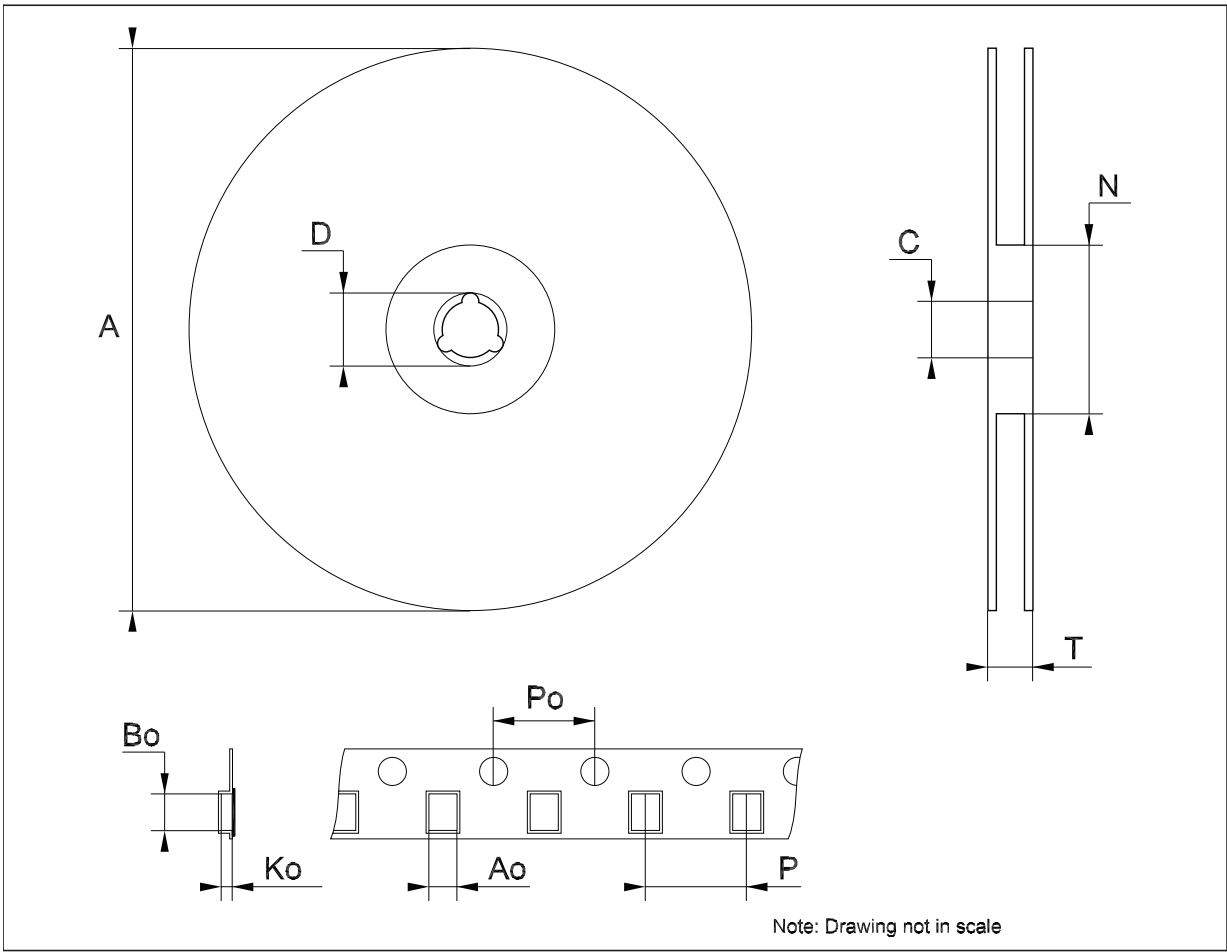


Figure 26. TSOT23-5L footprint recommended data

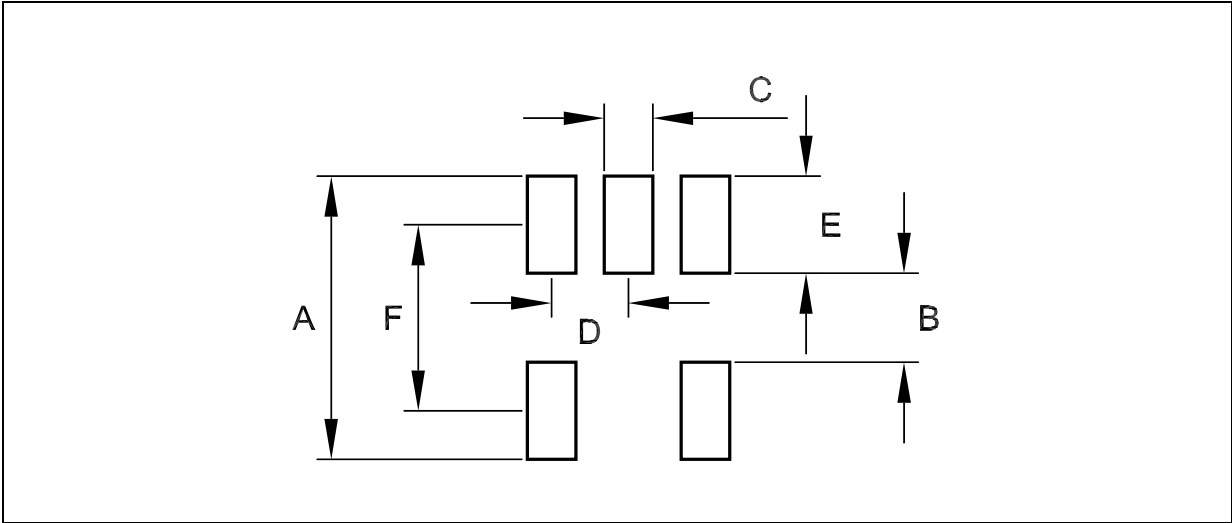


Table 9. Footprint data

| Values |      |       |
|--------|------|-------|
|        | mm.  | inch. |
| A      | 3.50 | 0.138 |
| B      | 1.10 | 0.043 |
| C      | 0.60 | 0.024 |
| D      | 0.95 | 0.037 |
| E      | 1.20 | 0.047 |
| F      | 2.30 | 0.090 |

## 9 Revision history

Table 10. Document revision history

| Date        | Revision | Changes                                                                                                                                                            |
|-------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10-Jan-2008 | 1        | Initial release.                                                                                                                                                   |
| 01-Feb-2008 | 2        | Modified: <a href="#">Figure 3 on page 9</a> .                                                                                                                     |
| 23-Feb-2010 | 3        | Modified: $V_{IN}$ value <a href="#">Table 3 on page 5</a> .                                                                                                       |
| 23-Jun-2011 | 4        | Modified: FB unit <a href="#">Table 6 on page 6</a> .                                                                                                              |
| 17-Feb-2012 | 5        | Modified: quiescent current max value 600 ==> 650 <a href="#">Table 6 on page 6</a> ,<br><a href="#">Table 7 on page 7</a> and <a href="#">Table 8 on page 8</a> . |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)