NST3946DXV6

Complementary General Purpose Transistor

The NST3946DXV6T1 device is a spin-off of our popular SOT−23/SOT−323 three-leaded device. It is designed for general purpose amplifier applications and is housed in the SOT−563 six-leaded surface mount package. By putting two discrete devices in one package, this device is ideal for low-power surface mount applications where board space is at a premium.

- h_{FE}, 100−300
- Low $V_{CE(sat)}$, ≤ 0.4 V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

Table 1. MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector−Emitter Voltage (NPN) (PNP)	V_{CEO}	 40 −40	Vdc
Collector−Base Voltage (NPN) (PNP)	V_{CBO}	 60 −40	Vdc
Emitter−Base Voltage (NPN) (PNP)	V_{EBO}	 6.0 −5.0	Vdc
Collector Current − Continuous (NPN) (PNP)	I_C	 200 −200	mAdc
Electrostatic Discharge	ESD	HBM>16000, MM>2000	V


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

ON Semiconductor®

http://onsemi.com



SOT−563
CASE 463A



NST3946DXV6T1*

*Q1 PNP
Q2 NPN

MARKING DIAGRAM



46 = Specific Device Code
M = Date Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Package	Shipping†
NST3946DXV6T1G	SOT−563 (Pb-Free)	4,000 / Tape & Reel
NSVT3946DXV6T1G	SOT−563 (Pb-Free)	4,000 / Tape & Reel
NST3946DXV6T5G	SOT−563 (Pb-Free)	8,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2014

Table 2. THERMAL CHARACTERISTICS

Characteristic (One Junction Heated)		Symbol	Max	Unit
Total Device Dissipation Derate above 25°C	T_A = 25°C	P_D	357 (Note 1) 2.9 (Note 1)	mW mW/°C
Thermal Resistance Junction-to-Ambient		$R_{\theta JA}$	350 (Note 1)	°C/W
Characteristic (Both Junctions Heated)		**Symbol**	**Max**	**Unit**
Total Device Dissipation Derate above 25°C	T_A = 25°C	P_D	500 (Note 1) 4.0 (Note 1)	mW mW/°C
Thermal Resistance Junction-to-Ambient		$R_{\theta JA}$	250 (Note 1)	°C/W
Junction and Storage Temperature Range		T_J, T_{stg}	55 to +150	°C

1. FR−4 @ Minimum Pad

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector−Emitter Breakdown Voltage (Note 2)		$V_{(BR)CEO}$			Vdc
(I_C = 1.0 mAdc, I_B = 0)	(NPN)		40	−	
(I_C = −1.0 mAdc, I_B = 0)	(PNP)		−40	−	
Collector−Base Breakdown Voltage		$V_{(BR)CBO}$			Vdc
(I_C = 10 μAdc, I_E = 0)	(NPN)		60	−	
(I_C = −10 μAdc, I_E = 0)	(PNP)		−40	−	
Emitter−Base Breakdown Voltage		$V_{(BR)EBO}$			Vdc
(I_E = 10 μAdc, I_C = 0)	(NPN)		6.0	−	
(I_E = −10 μAdc, I_C = 0)	(PNP)		−5.0	−	
Base Cutoff Current		I_{BL}			nAdc
(V_{CE} = 30 Vdc, V_{EB} = 3.0 Vdc)	(NPN)		−	50	
(V_{CE} = −30 Vdc, V_{EB} = −3.0 Vdc)	(PNP)		−	−50	
Collector Cutoff Current		I_{CEX}			nAdc
(V_{CE} = 30 Vdc, V_{EB} = 3.0 Vdc)	(NPN)		−	50	
(V_{CE} = −30 Vdc, V_{EB} = −3.0 Vdc)	(PNP)		−	−50	
ON CHARACTERISTICS (Note 2)					
DC Current Gain		h_{FE}			−
(I_C = 0.1 mAdc, V_{CE} = 1.0 Vdc)	(NPN)		40	−	
(I_C = 1.0 mAdc, V_{CE} = 1.0 Vdc)			70	−	
(I_C = 10 mAdc, V_{CE} = 1.0 Vdc)			100	300	
(I_C = 50 mAdc, V_{CE} = 1.0 Vdc)			60	−	
(I_C = 100 mAdc, V_{CE} = 1.0 Vdc)			30	−	
(I_C = −0.1 mAdc, V_{CE} = −1.0 Vdc)	(PNP)		60	−	
(I_C = −1.0 mAdc, V_{CE} = −1.0 Vdc)			80	−	
(I_C = −10 mAdc, V_{CE} = −1.0 Vdc)			100	300	
(I_C = −50 mAdc, V_{CE} = −1.0 Vdc)			60	−	
(I_C = −100 mAdc, V_{CE} = −1.0 Vdc)			30	−	
Collector−Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 mAdc, I_B = 1.0 mAdc)	(NPN)		−	0.2	
(I_C = 50 mAdc, I_B = 5.0 mAdc)			−	0.3	
(I_C = −10 mAdc, I_B = −1.0 mAdc)	(PNP)		−	−0.25	
(I_C = −50 mAdc, I_B = −5.0 mAdc)			−	−0.4	
Base−Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 10 mAdc, I_B = 1.0 mAdc)	(NPN)		0.65	0.85	
(I_C = 50 mAdc, I_B = 5.0 mAdc)			−	0.95	
(I_C = −10 mAdc, I_B = −1.0 mAdc)	(PNP)		−0.65	−0.85	
(I_C = −50 mAdc, I_B = −5.0 mAdc)			−	−0.95	


ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (continued)


Characteristic		Symbol	Min	Max	Unit
SMALL-SIGNAL CHARACTERISTICS					
Current−Gain − Bandwidth Product		f_T			MHz
(I_C = 10 mAdc, V_{CE} = 20 Vdc, f = 100 MHz)	(NPN)		300	−	
(I_C = −10 mAdc, V_{CE} = −20 Vdc, f = 100 MHz)	(PNP)		250	−	
Output Capacitance		C_{obo}			pF
(V_{CB} = 5.0 Vdc, I_E = 0, f = 1.0 MHz)	(NPN)		−	4.0	
(V_{CB} = −5.0 Vdc, I_E = 0, f = 1.0 MHz)	(PNP)		−	4.5	
Input Capacitance		C_{ibo}			pF
(V_{EB} = 0.5 Vdc, I_C = 0, f = 1.0 MHz)	(NPN)		−	8.0	
(V_{EB} = −0.5 Vdc, I_C = 0, f = 1.0 MHz)	(PNP)		−	10.0	
Input Impedance		h_{ie}			k Ω
(V_{CE} = 10 Vdc, I_C = 1.0 mAdc, f = 1.0 kHz)	(NPN)		1.0	10	
(V_{CE} = −10 Vdc, I_C = −1.0 mAdc, f = 1.0 kHz)	(PNP)		2.0	12	
Voltage Feedback Ratio		h_{re}			X 10^{-4}
(V_{CE} = 10 Vdc, I_C = 1.0 mAdc, f = 1.0 kHz)	(NPN)		0.5	8.0	
(V_{CE} = −10 Vdc, I_C = −1.0 mAdc, f = 1.0 kHz)	(PNP)		0.1	10	
Small−Signal Current Gain		h_{fe}			−
(V_{CE} = 10 Vdc, I_C = 1.0 mAdc, f = 1.0 kHz)	(NPN)		100	400	
(V_{CE} = −10 Vdc, I_C = −1.0 mAdc, f = 1.0 kHz)	(PNP)		100	400	
Output Admittance		h_{oe}			μmhos
(V_{CE} = 10 Vdc, I_C = 1.0 mAdc, f = 1.0 kHz)	(NPN)		1.0	40	
(V_{CE} = −10 Vdc, I_C = −1.0 mAdc, f = 1.0 kHz)	(PNP)		3.0	60	
Noise Figure		NF			dB
(V_{CE} = 5.0 Vdc, I_C = 100 μAdc, R_S = 1.0 k Ω, f = 1.0 kHz)	(NPN)		−	5.0	
(V_{CE} = −5.0 Vdc, I_C = −100 μAdc, R_S = 1.0 k Ω, f = 1.0 kHz)	(PNP)		−	4.0	
SWITCHING CHARACTERISTICS					
Delay Time		t_d			ns
(V_{CC} = 3.0 Vdc, V_{BE} = −0.5 Vdc)	(NPN)		−	35	
(V_{CC} = −3.0 Vdc, V_{BE} = 0.5 Vdc)	(PNP)		−	35	
Rise Time		t_r			
(I_C = 10 mAdc, I_{B1} = 1.0 mAdc)	(NPN)		−	35	
(I_C = −10 mAdc, I_{B1} = −1.0 mAdc)	(PNP)		−	35	
Storage Time		t_s			ns
(V_{CC} = 3.0 Vdc, I_C = 10 mAdc)	(NPN)		−	200	
(V_{CC} = −3.0 Vdc, I_C = −10 mAdc)	(PNP)		−	225	
Fall Time		t_f			
(I_{B1} = I_{B2} = 1.0 mAdc)	(NPN)		−	50	
(I_{B1} = I_{B2} = −1.0 mAdc)	(PNP)		−	75	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.

(NPN)

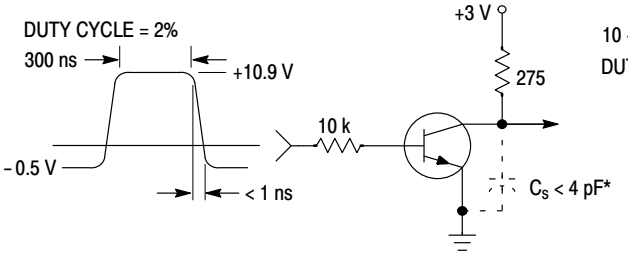

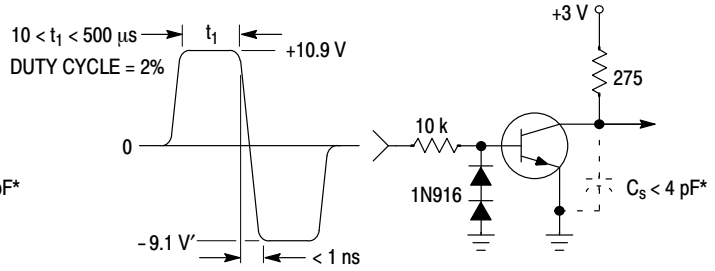

* Total shunt capacitance of test jig and connectors

Figure 1. Delay and Rise Time Equivalent Test Circuit

Figure 2. Storage and Fall Time Equivalent Test Circuit

TYPICAL TRANSIENT CHARACTERISTICS

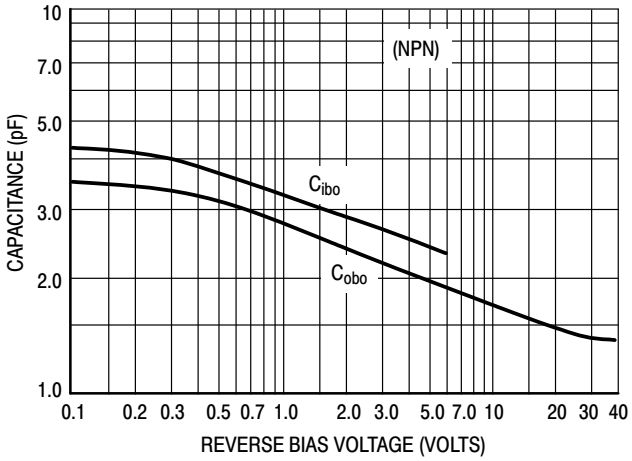


Figure 3. Capacitance

(NPN)

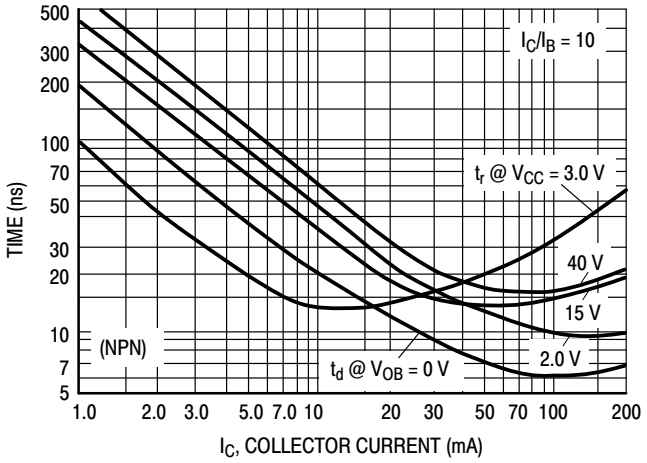


Figure 4. Turn-On Time

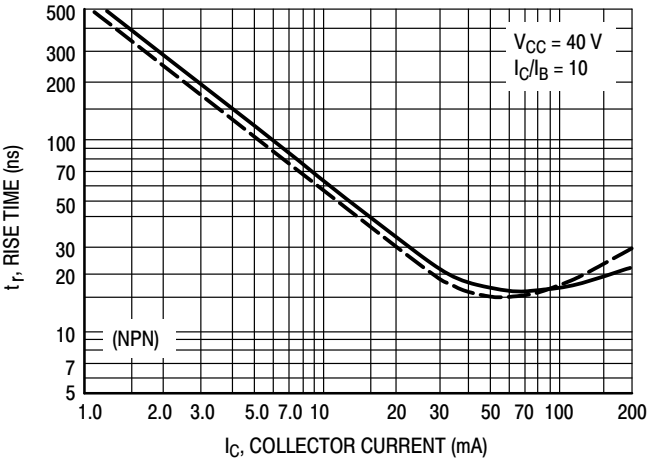


Figure 5. Rise Time

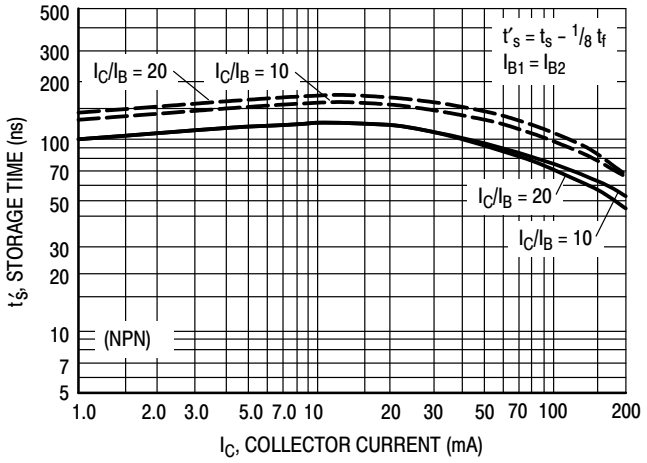


Figure 6. Storage Time

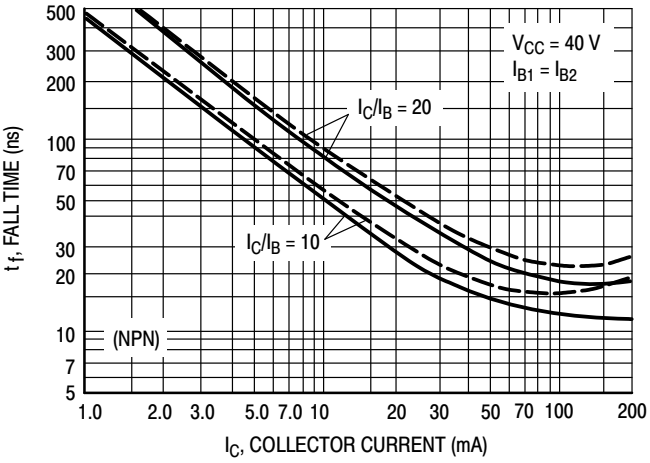


Figure 7. Fall Time

TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS
NOISE FIGURE VARIATIONS

(V_{CE} = 5.0 Vdc, T_A = 25°C, Bandwidth = 1.0 Hz)

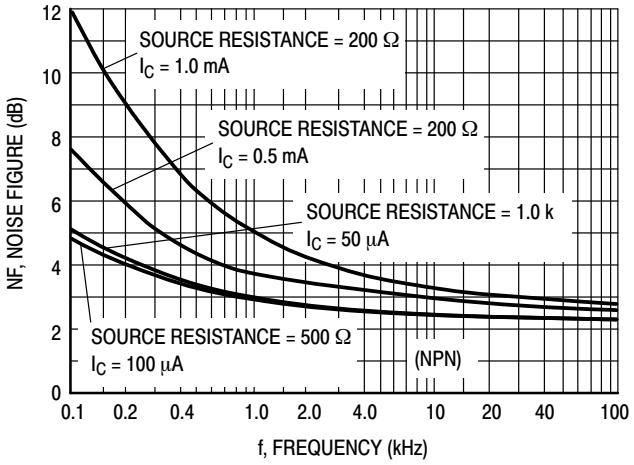


Figure 8. Noise Figure

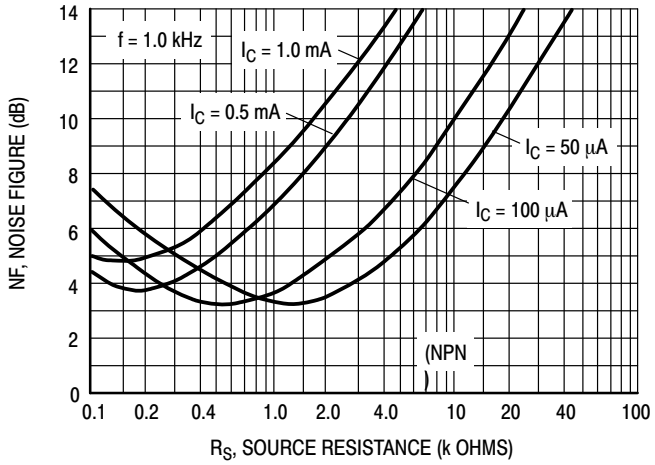


Figure 9. Noise Figure

(NPN)

h PARAMETERS

(V_{CE} = 10 Vdc, f = 1.0 kHz, T_A = 25°C)

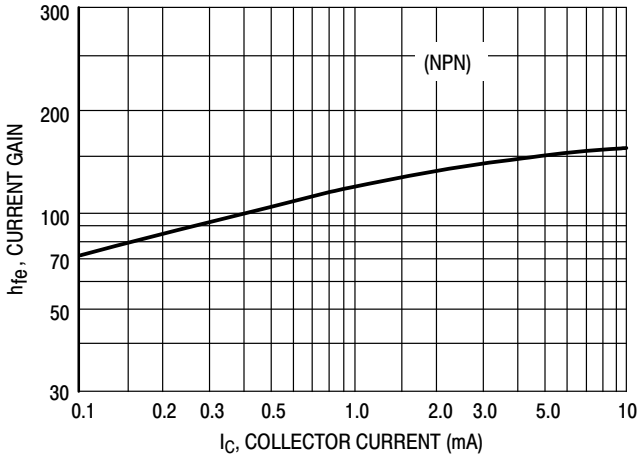


Figure 10. Current Gain

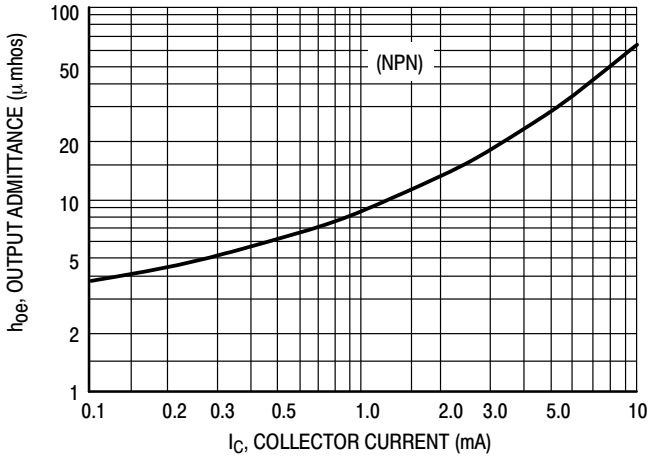


Figure 11. Output Admittance

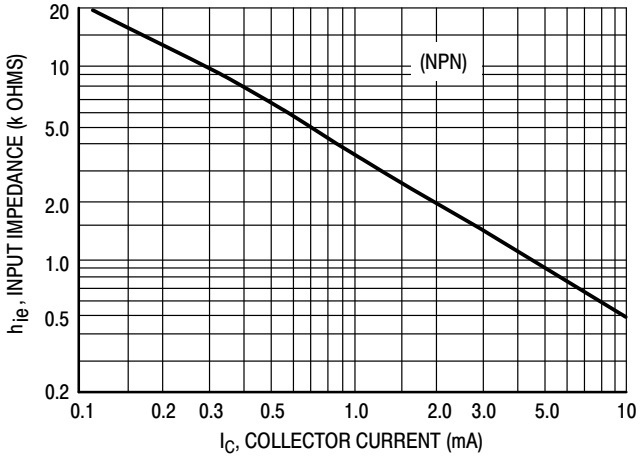


Figure 12. Input Impedance

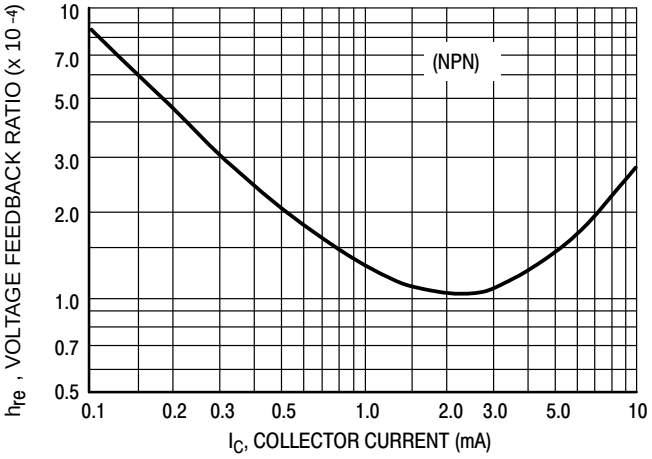


Figure 13. Voltage Feedback Ratio

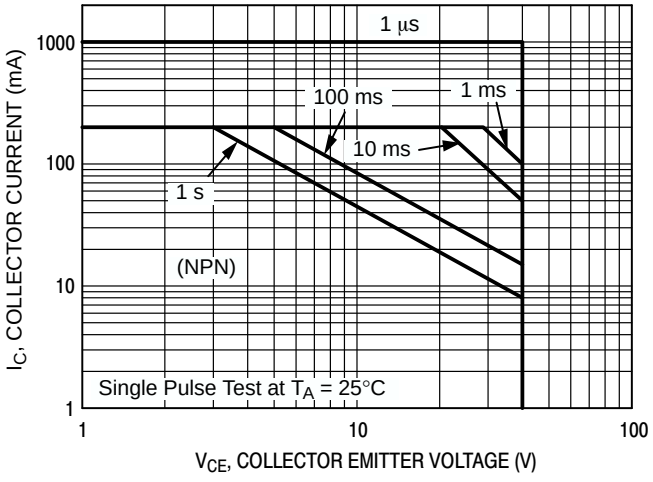


Figure 14. Safe Operating Area

(NPN)

TYPICAL STATIC CHARACTERISTICS

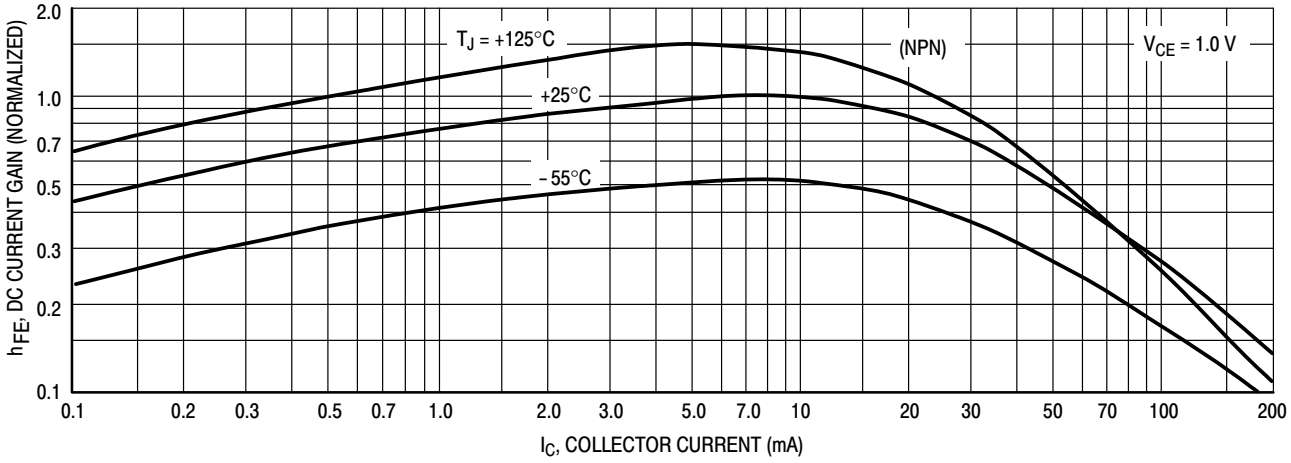


Figure 15. DC Current Gain

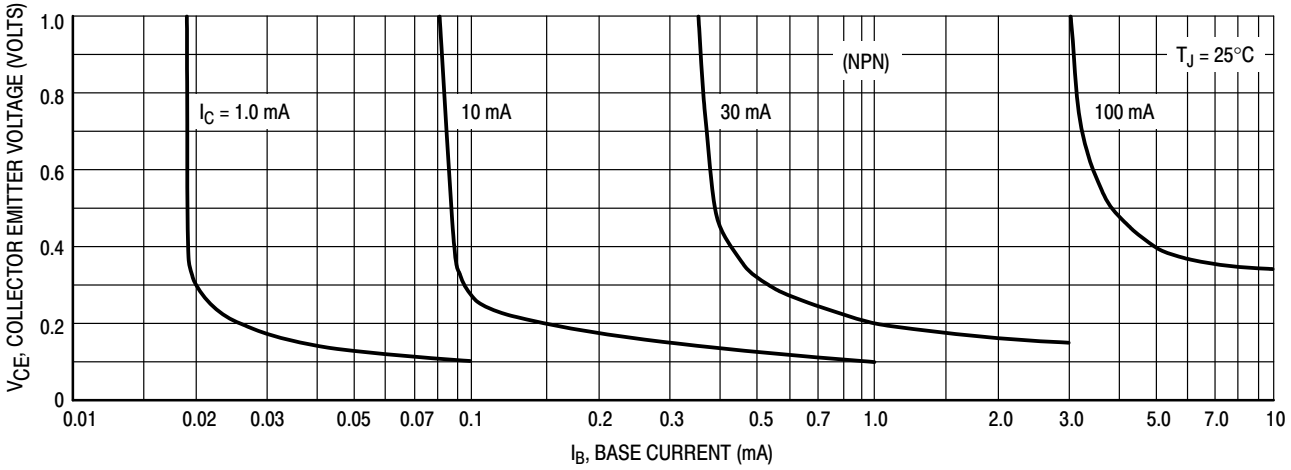


Figure 16. Collector Saturation Region

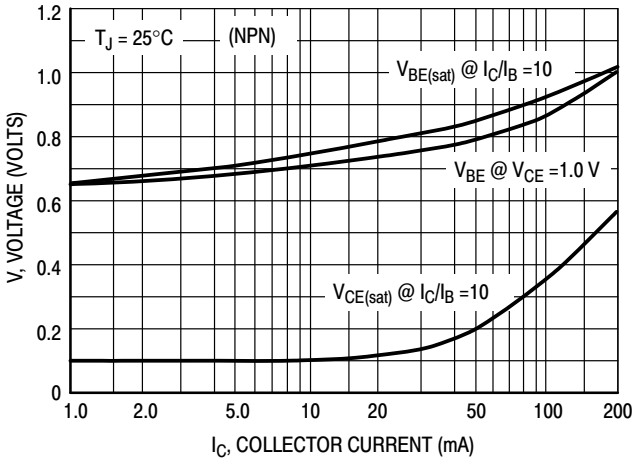


Figure 17. “ON” Voltages

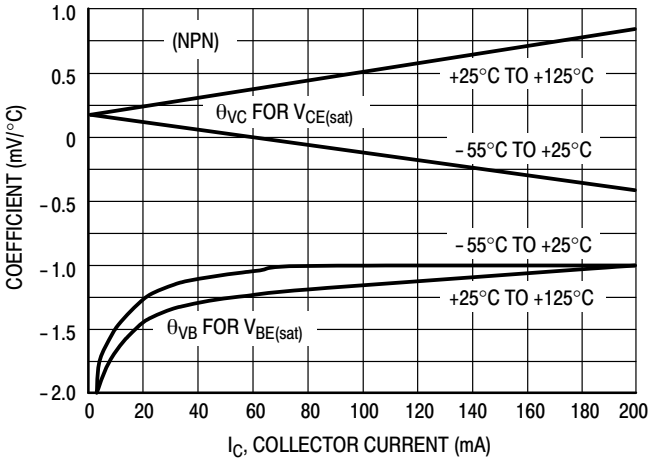


Figure 18. Temperature Coefficients

(PNP)

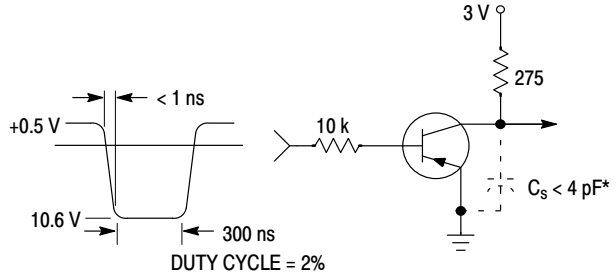


Figure 19. Delay and Rise Time Equivalent Test Circuit

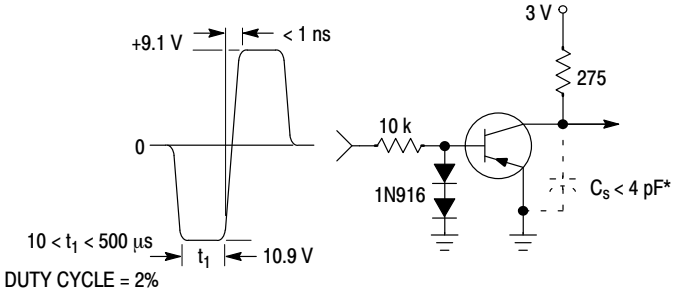


Figure 20. Storage and Fall Time Equivalent Test Circuit

* Total shunt capacitance of test jig and connectors

TYPICAL TRANSIENT CHARACTERISTICS

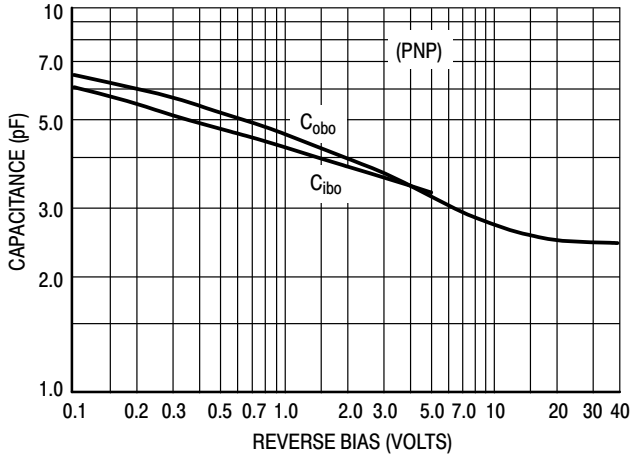


Figure 21. Capacitance

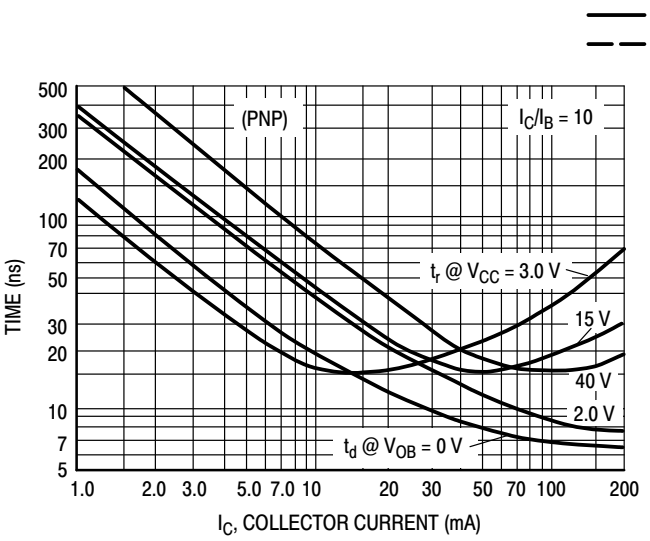


Figure 22. Turn-On Time

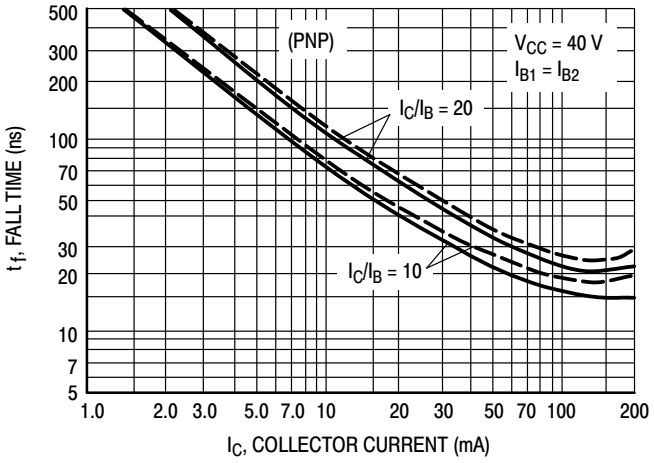


Figure 23. Fall Time

(PNP)

TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS
NOISE FIGURE VARIATIONS

(V_{CE} = −5.0 Vdc, T_A = 25°C, Bandwidth = 1.0 Hz)

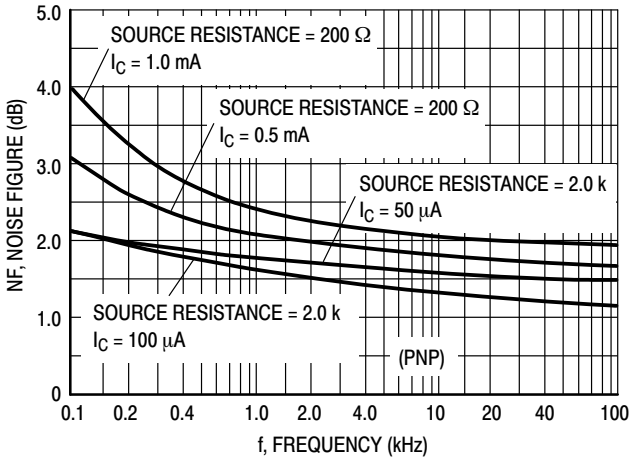


Figure 24.

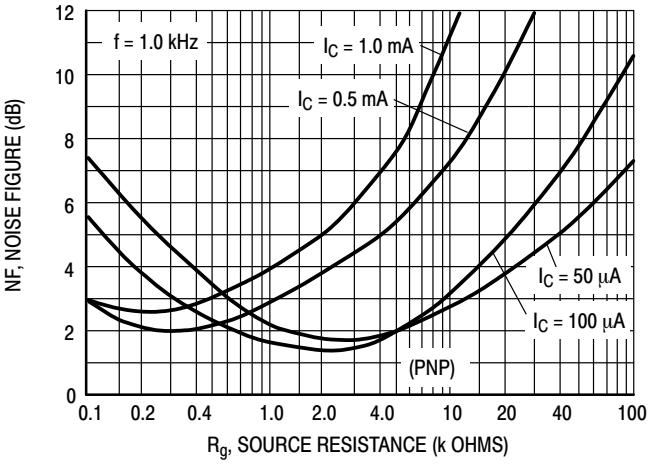


Figure 25.

h PARAMETERS

(V_{CE} = −10 Vdc, f = 1.0 kHz, T_A = 25°C)

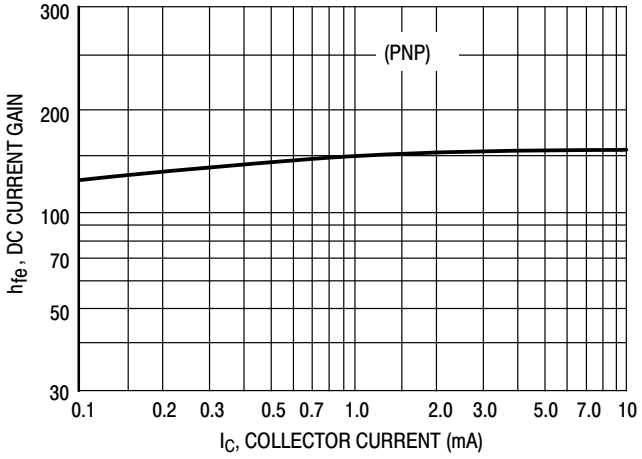


Figure 26. Current Gain

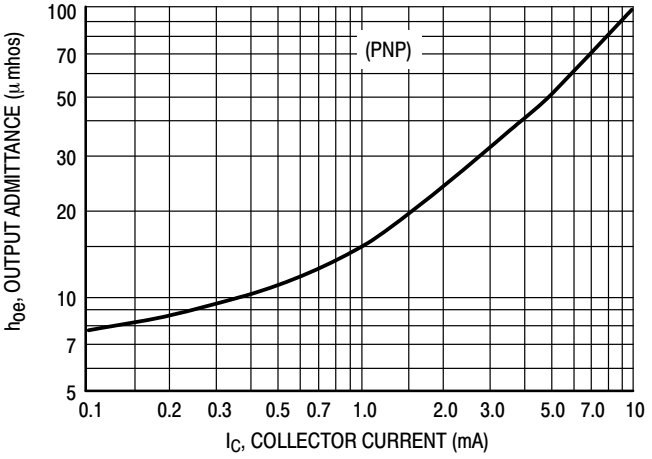


Figure 27. Output Admittance

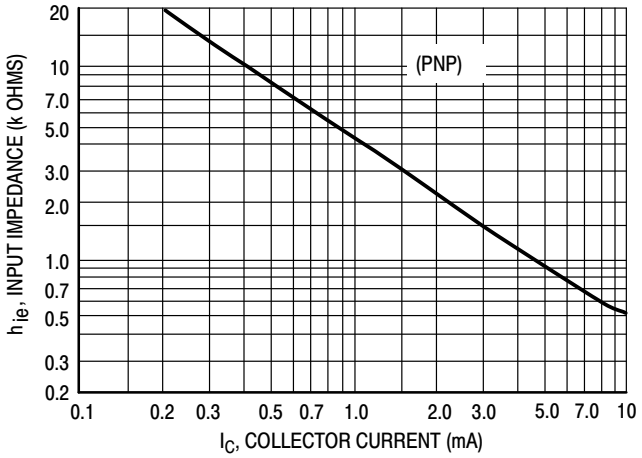


Figure 28. Input Impedance

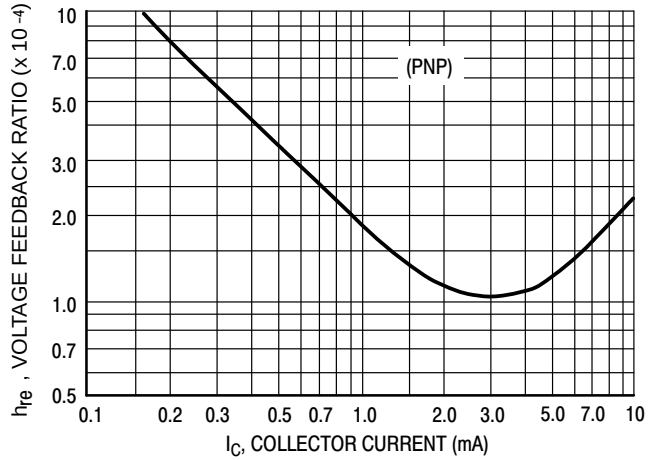


Figure 29. Voltage Feedback Ratio

(PNP)

TYPICAL STATIC CHARACTERISTICS

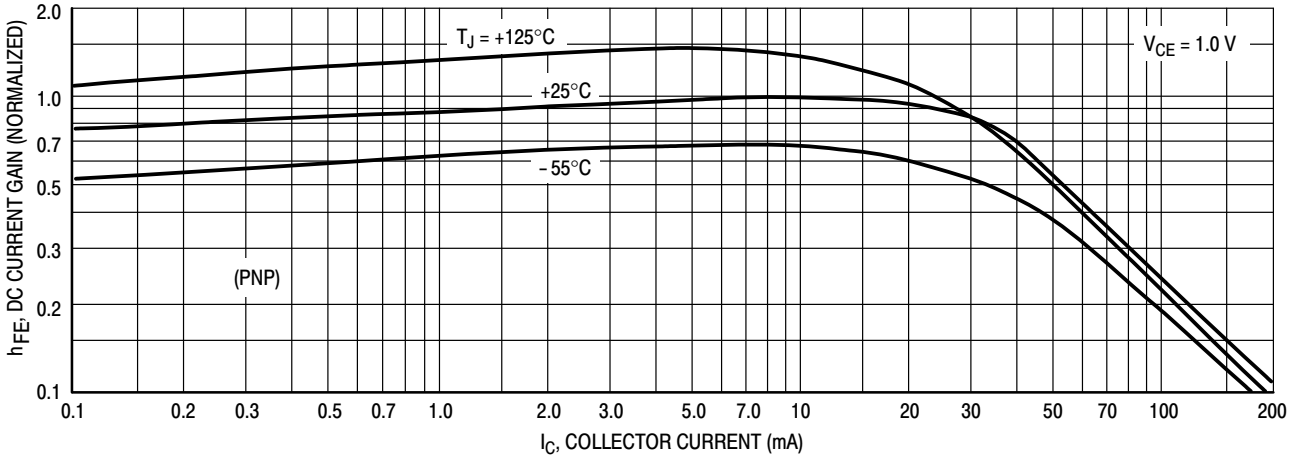


Figure 30. DC Current Gain

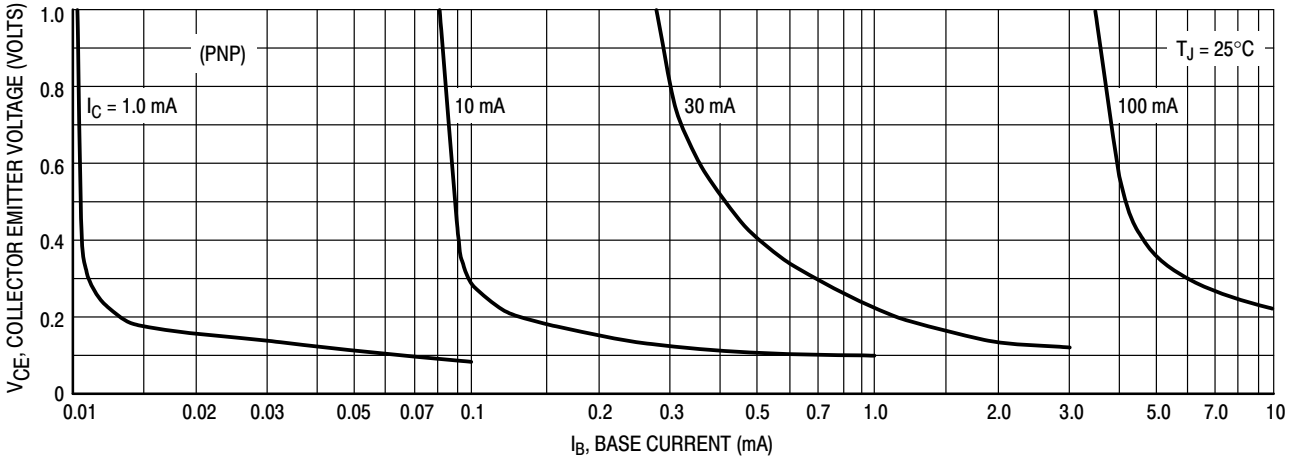


Figure 31. Collector Saturation Region

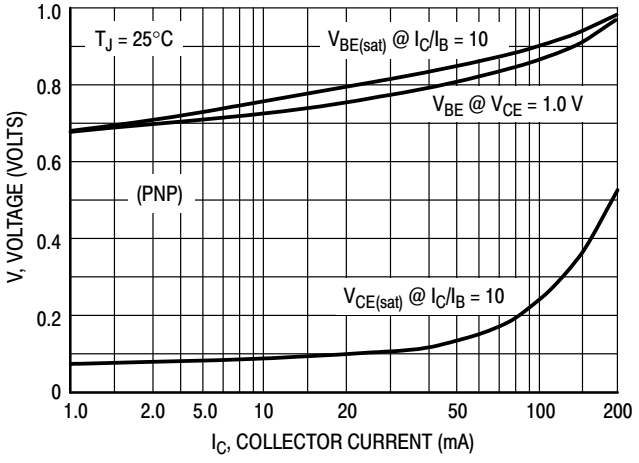


Figure 32. “ON” Voltages

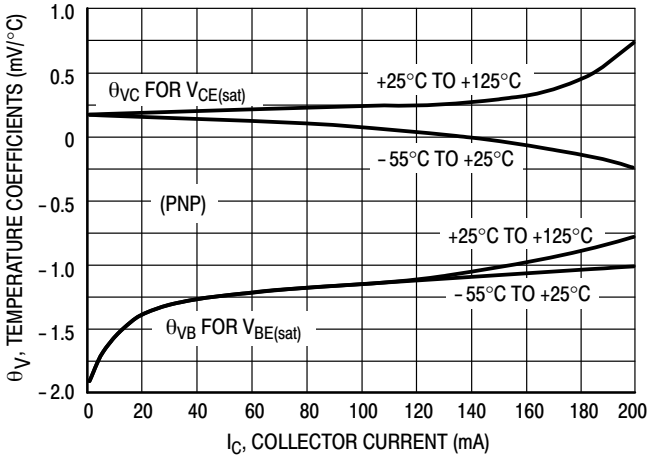


Figure 33. Temperature Coefficients


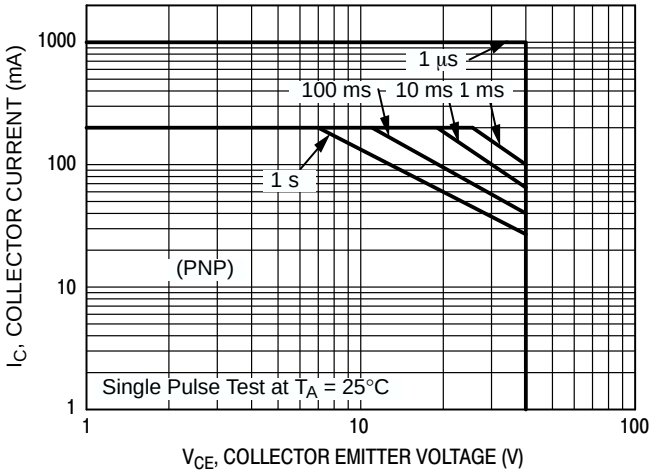


Figure 34. Safe Operating Area

NST3946DXV6

PACKAGE DIMENSIONS


SOT−563, 6 LEAD
CASE 463A
ISSUE F

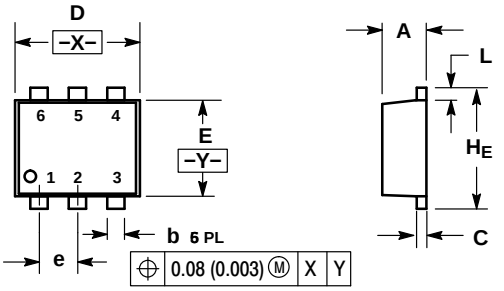

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
A	0.50	0.55	0.60	0.020	0.021	0.023
b	0.17	0.22	0.27	0.007	0.009	0.011
C	0.08	0.12	0.18	0.003	0.005	0.007
D	1.50	1.60	1.70	0.059	0.062	0.066
E	1.10	1.20	1.30	0.043	0.047	0.051
e	0.5 BSC			0.02 BSC		
L	0.10	0.20	0.30	0.004	0.008	0.012
H_E	1.50	1.60	1.70	0.059	0.062	0.066

SOLDERING FOOTPRINT*

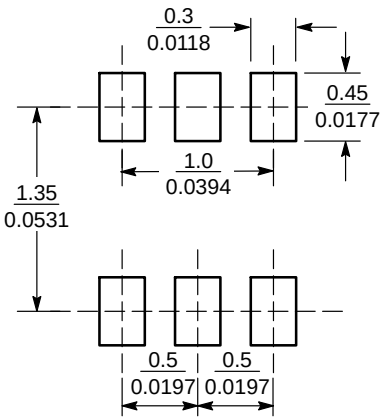

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

NST3946DXV6T1/D