


REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
.062 +/- .005 INCH THICKNESS WITH 2 OZ.
COPPER FINISHED ON 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003
INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. PANELIZED BOARD SHOULD TAB ROUTE AND RETAIN WITH RAT-BITES.

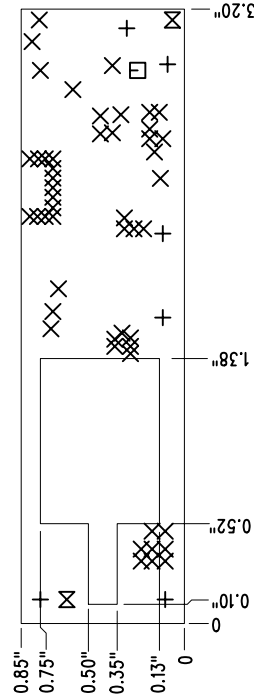

SIZE	QTY	SYM	PLTD
65	6	+	PLTD
10	50	X	PLTD
40	1	□	PLTD
70	2	⊗	NPLTD

FAB DRAWING

APPROVALS		LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	JUNE WU	4/1/02	TITLE:		
ENGR	David C.	4/1/02	LT1373CS8, POWER SUPPLY, CCFL, SINGLE LAMP		
			SIZE	A	REV. A
			DEMO	DC515A	
SCALE = NONE			DES-230544		SHT 1 of 1