


SIZE	QTY	SYM	PLTD
95	5	+	PLTD
35	5	X	PLTD
15	42	□	PLTD
72	2	◇	NPLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 2 OZ. COPPER
THICKNESS .062 +/- .006 TOTAL OF 2 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003
INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE EXCEPT IN THE AREA AS SHOWN.
7. SCORING:

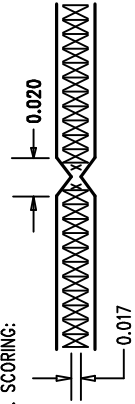

FAB DRAWING

APPROVALS		LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	JUNE WU	9/13/00	TITLE: LTC1732EMS Li-Ion Battery Charger		
ENGR	FRAN H.	9/13/00			
SCALE = NONE		SIZE A	DEMO DC364A	LTC1732EMS	REV. A
		DES-230407			
		SHT 1 of 1			