preliminary


Schottky Diode Gen ²

V_{RRM} = 100 V
I_{FAV} = 2x 30 A
V_F = 0.78 V


High Performance Schottky Diode
Low Loss and Soft Recovery
Common Cathode

Part number

DSA60C100PB

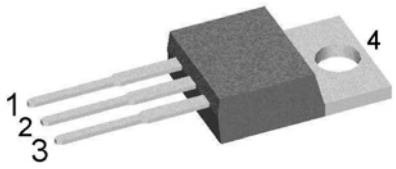

Backside: cathode

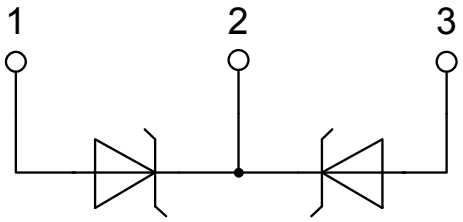

Features / Advantages:

- Very low Vf
- Extremely low switching losses
- Low Irm values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Package: TO-220

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

© 2013 IXYS all rights reserved

preliminary


Schottky				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			100	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			100	V
I_R	*reverse current, drain current*	V_R = 100 V	T_{VJ} = 25°C			450	µA
		V_R = 100 V	T_{VJ} = 125°C			5	mA
V_F	*forward voltage drop*	I_F = 30 A	T_{VJ} = 25°C			0.95	V
		I_F = 60 A				1.15	V
		I_F = 30 A	T_{VJ} = 125°C			0.78	V
		I_F = 60 A				1.01	V
I_{FAV}	*average forward current*	T_C = 150°C	T_{VJ} = 175°C			30	A
		rectangular d = 0.5					
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 175°C			0.46	V
r_F	*slope resistance* }					7.8	mΩ
R_{thJC}	*thermal resistance junction to case*					0.85	K/W
R_{thCH}	*thermal resistance case to heatsink*				0.50		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			175	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine; V_R = 0 V	T_{VJ} = 45°C			440	A
C_J	*junction capacitance*	V_R = 12 V f = 1 MHz	T_{VJ} = 25°C		289		pF

© 2013 IXYS all rights reserved

preliminary

Package TO-220			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	*RMS current*	per terminal [1]			35	A
T_{VJ}	*virtual junction temperature*		-55		175	°C
T_{op}	*operation temperature*		-55		150	°C
T_{stg}	*storage temperature*		-55		150	°C
Weight				2		g
M_D	*mounting torque*		0.4		0.6	Nm
F_C	*mounting force with clip*		20		60	N

Product Marking

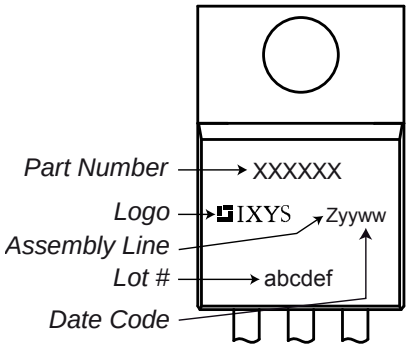

Part number


D = Diode
S = Schottky Diode
A = low VF
60 = Current Rating [A]
C = Common Cathode
100 = Reverse Voltage [V]
PB = TO-220AB (3)

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSA60C100PB	DSA60C100PB	Tube	50	502503

Similar Part	Package	Voltage class
DSA50C100HB	TO-247AD (3)	100
DSA50C100QB	TO-3P (3)	100

Equivalent Circuits for Simulation

** on die level* T_{VJ} = 175 °C




Schottky


$V_{0\,max}$	*threshold voltage*	0.46	V
$R_{0\,max}$	*slope resistance **	4.6	mΩ

© 2013 IXYS all rights reserved

Outlines TO-220

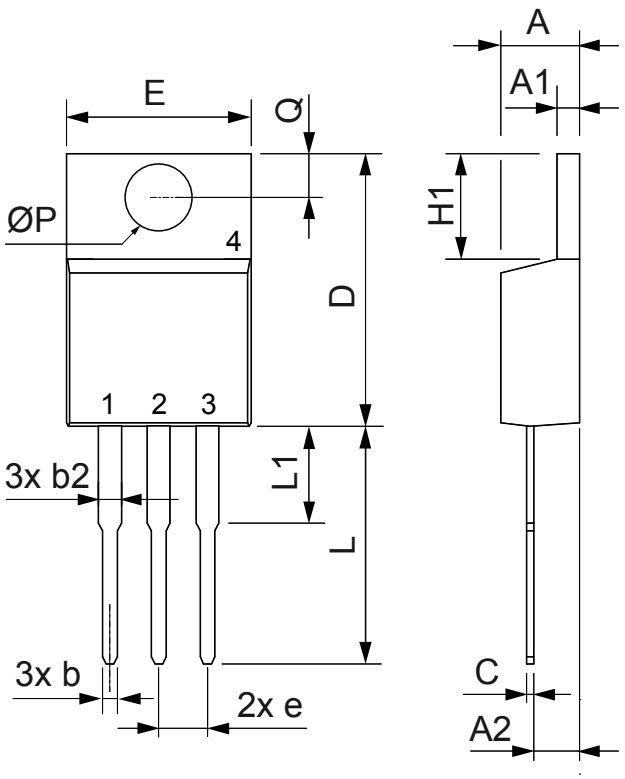

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	2.54	BSC	0.100	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125

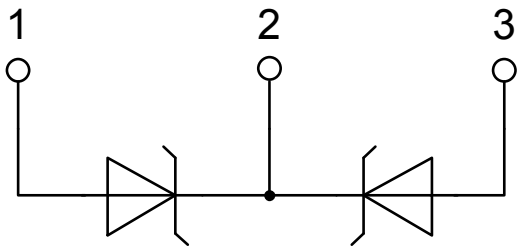

© 2013 IXYS all rights reserved