
IXYS

X3-Class HiPerFET™ Power MOSFET


IXFT150N30X3HV
IXFH150N30X3
IXFK150N30X3

V_{DSS} = 300V
I_{D25} = 150A
$R_{DS(on)}$ ≤ 8.3mΩ


N-Channel Enhancement Mode
Avalanche Rated




TO-268HV (IXFT..HV)



TO-247 (IXFH)



TO-264P (IXFK)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	300	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	300	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	150	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	400	A
I_A	T_C = 25°C	75	A
E_{AS}	T_C = 25°C	2	J
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	20	V/ns
P_D	T_C = 25°C	890	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
M_d	Mounting Torque (TO-247 & TO-264)	1.13 / 10	Nm/lb.in
Weight	TO-268HV	4	g
	TO-247	6	g
	TO-264P	10	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 1mA	300			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 4mA	2.5		4.5	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			25	μA
	T_J = 125°C			1	mA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1		6.6	8.3	mΩ

Features

- International Standard Packages
- Low $R_{DS(ON)}$ and Q_G
- Avalanche Rated
- Low Package Inductance

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

©2019 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	70	120		S
R_{Gi}	Gate Input Resistance		1.2		Ω
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		13.1		nF
C_{oss}			2.0		nF
C_{rss}			1.7		pF
	Effective Output Capacitance				
$C_{o(er)}$	Energy related; V_{GS} = 0V, V_{DS} = 0.8 • V_{DSS}		700		pF
$C_{o(tr)}$	Time related; V_{GS} = 0V, V_{DS} = 0.8 • V_{DSS}		2700		pF
$t_{d(on)}$	**Resistive Switching Times**		40		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		32		ns
$t_{d(off)}$	R_G = 5Ω (External)		187		ns
t_f			14		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		177		nC
Q_{gs}			63		nC
Q_{gd}			49		nC
R_{thJC}				0.14	°C/W
R_{thCS}	TO-247		0.21		°C/W
	TO-264P		0.15		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
I_S	V_{GS} = 0V			150	A
I_{SM}	Repetitive, pulse Width Limited by T_{JM}			600	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 75A, -di/dt = 100A/μs		167		ns
Q_{RM}	V_R = 100V		1100		nC
I_{RM}			13		A

Note 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123B1 6,306,728B1 6,404,065B1 6,534,343 6,583,505 6,683,344 6,710,405B2 6,710,463 6,727,585 6,759,692 6,771,478B2 7,005,734B2 7,063,975B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25°C

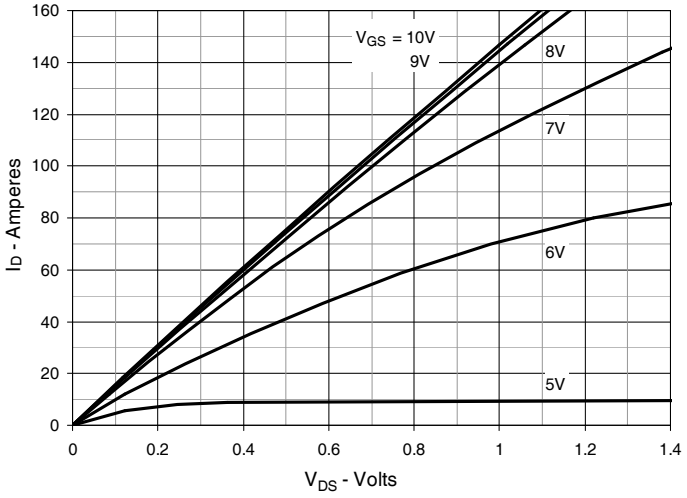


Fig. 2. Extended Output Characteristics @ T_J = 25°C

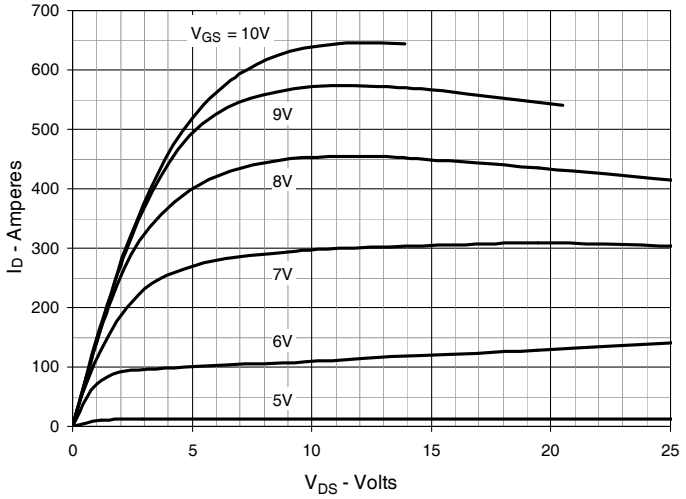


Fig. 3. Output Characteristics @ T_J = 125°C

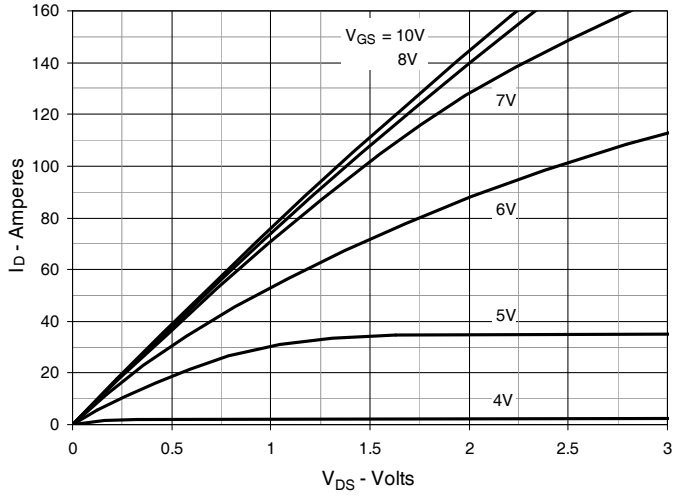


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 75A Value vs. Junction Temperature

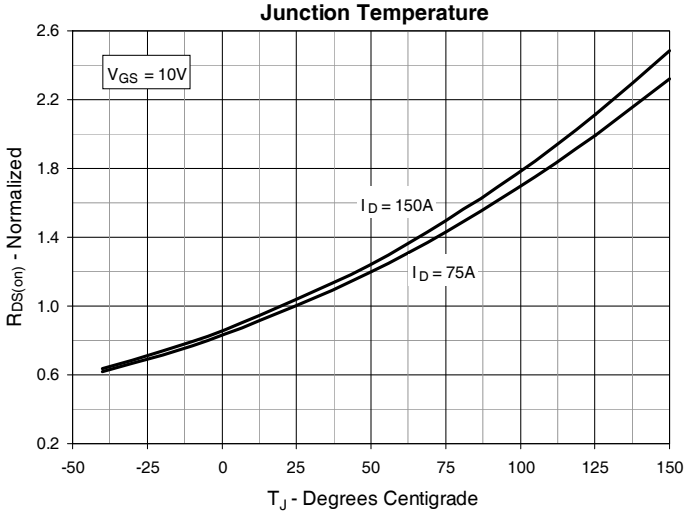


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 75A Value vs. Drain Current


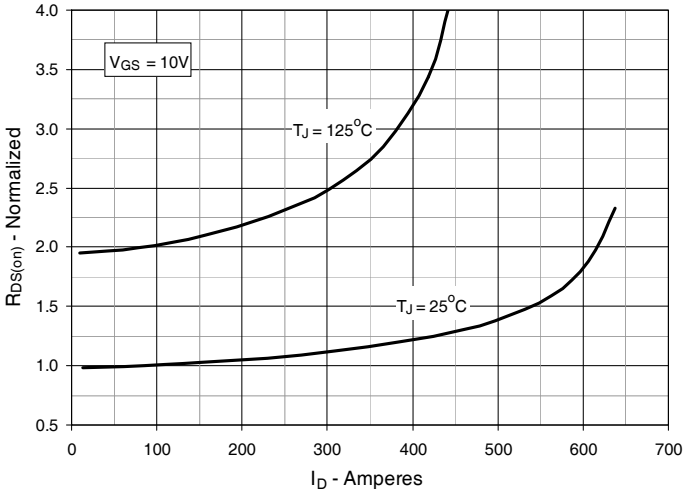


Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature

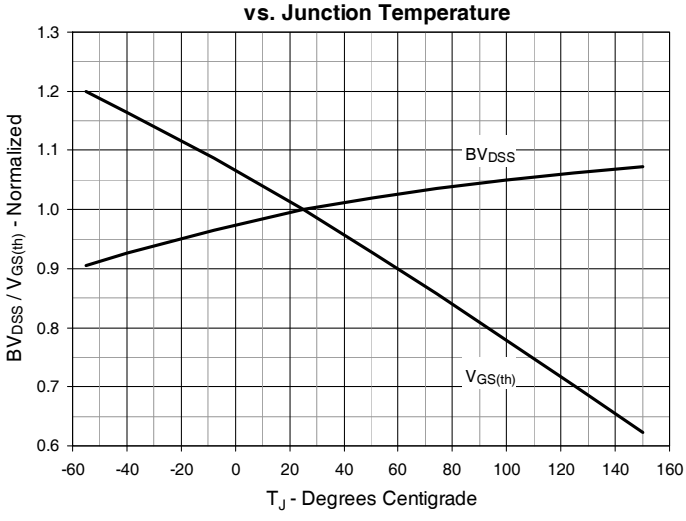

©2019 IXYS CORPORATION, All Rights Reserved

Fig. 7. Maximum Drain Current vs. Case Temperature

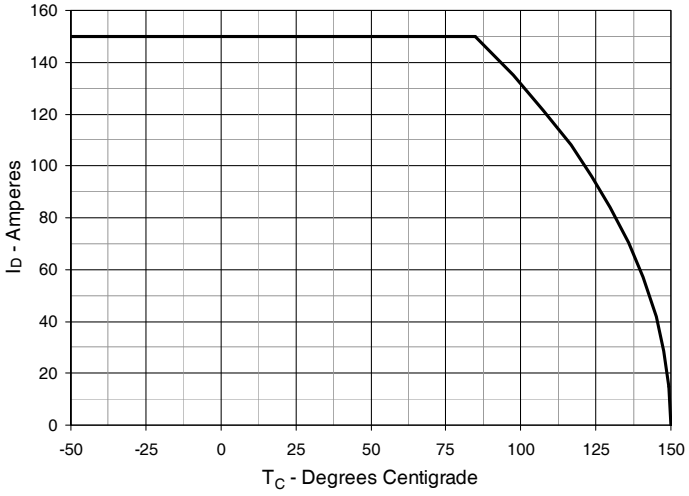


Fig. 8. Input Admittance

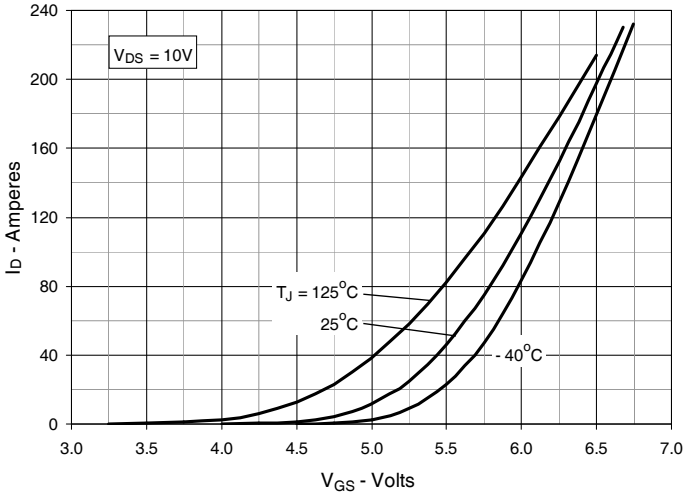


Fig. 9. Transconductance

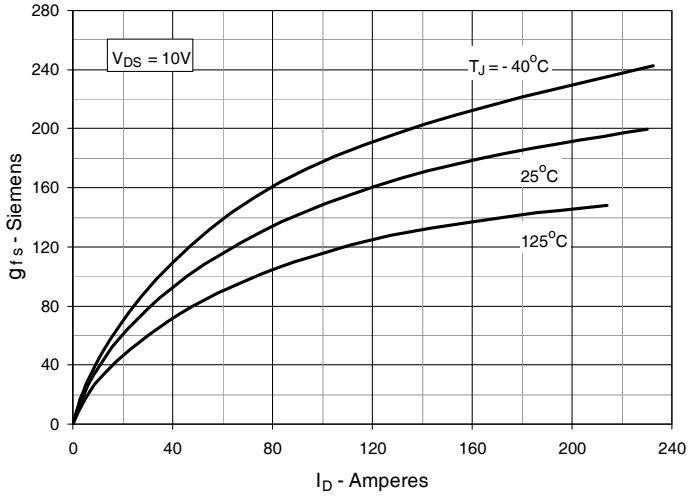


Fig. 10. Forward Voltage Drop of Intrinsic Diode

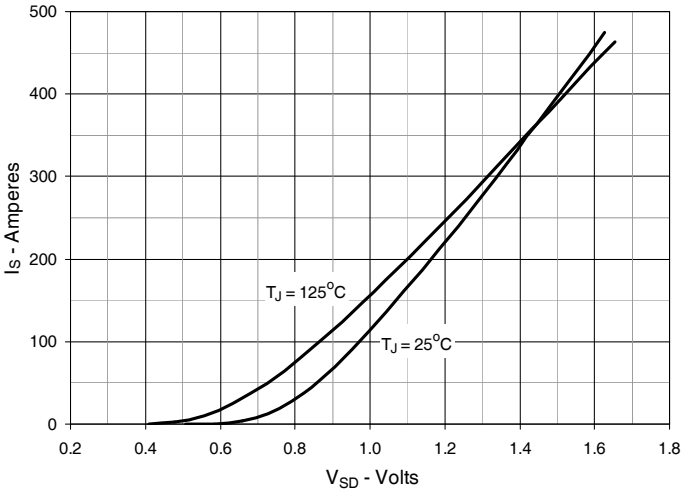


Fig. 11. Gate Charge


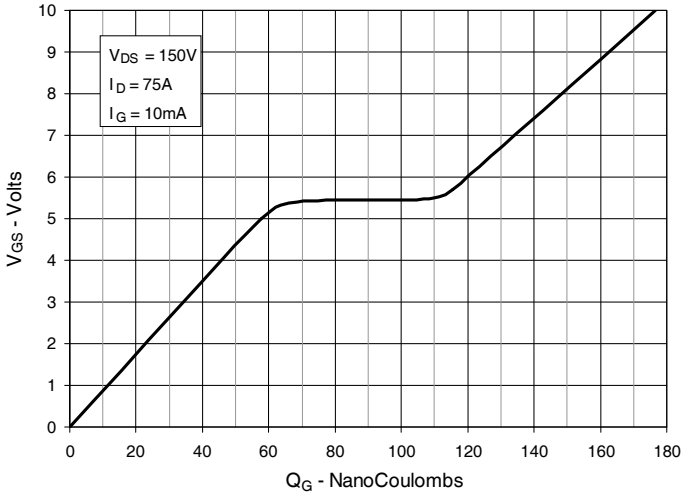


Fig. 12. Capacitance

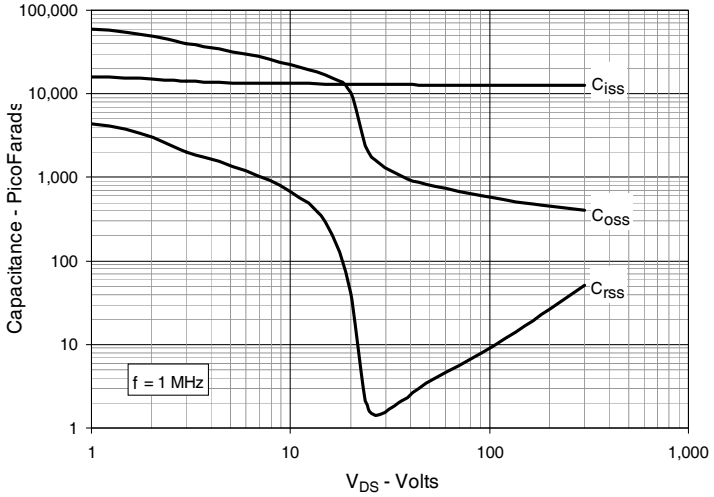

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Output Capacitance Stored Energy

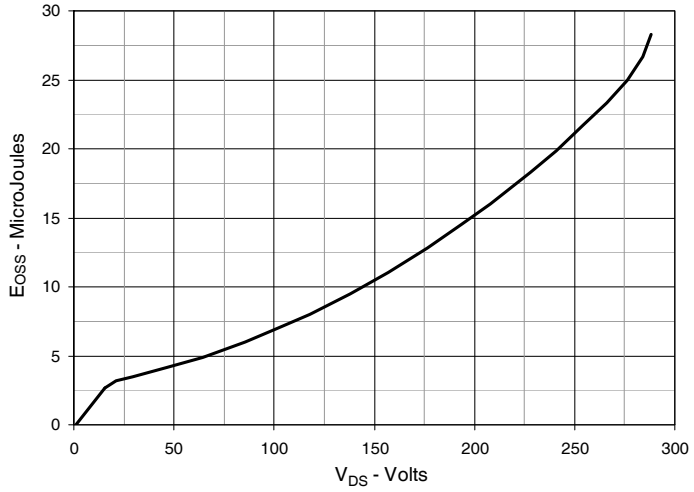


Fig. 14. Forward-Bias Safe Operating Area



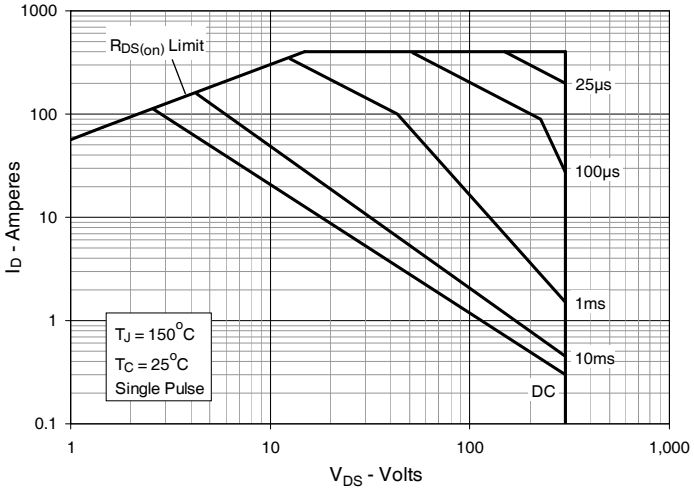


Fig. 15. Maximum Transient Thermal Impedance

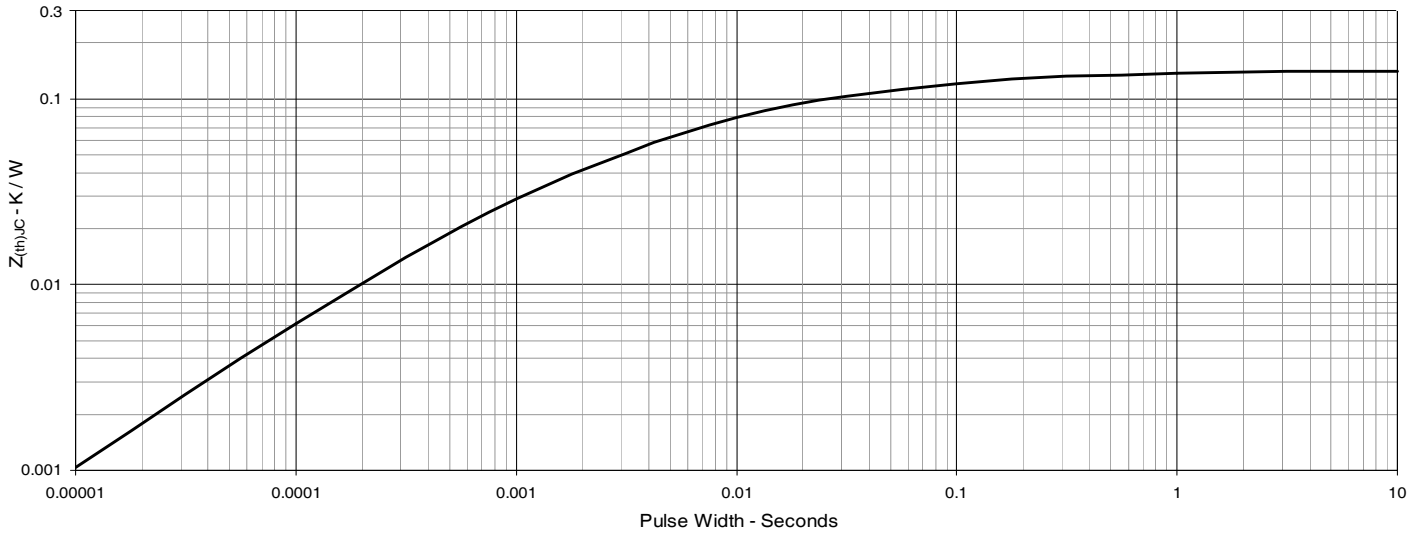

©2019 IXYS CORPORATION, All Rights Reserved

TO-268HV Outline

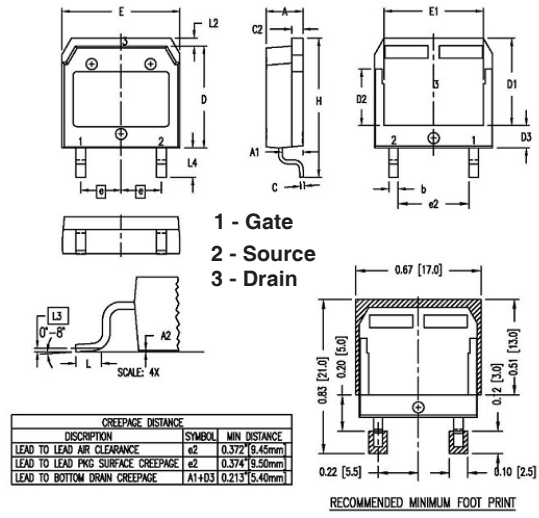


CREEPAGE DISTANCE		
DISCRIPTION	SYMBOL	MIN DISTANCE
LEAD TO LEAD AIR CLEARANCE	e2	0.372"[9.45mm]
LEAD TO LEAD PKG SURFACE CREEPAGE	e2	0.374"[9.50mm]
LEAD TO BOTTOM DRAIN CREEPAGE	A1+D3	0.213"[5.40mm]

SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.465	.476	11.80	12.10
D2	.295	.307	7.50	7.80
D3	.114	.126	2.90	3.20
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
[e]	.215	BSC	5.45	BSC
(e2)	.374	.386	9.50	9.80
H	.736	.752	18.70	19.10
L	.067	.079	1.70	2.00
L2	.039	.045	1.00	1.15
[L3]	.010	BSC	0.25	BSC
L4	.150	.161	3.80	4.10

NOTE:
1. This drawing meets all dimensions requirement of JEDEC outlines TO-268AA except L dimension.
2. All metal surface are matte pure tin plated except trimed area.
3. [L3] is Gauge plane to measure L.
4. These dimension do not include mold flash and they will not exceed 0.005[0.13] per side.


TO-247 Outline

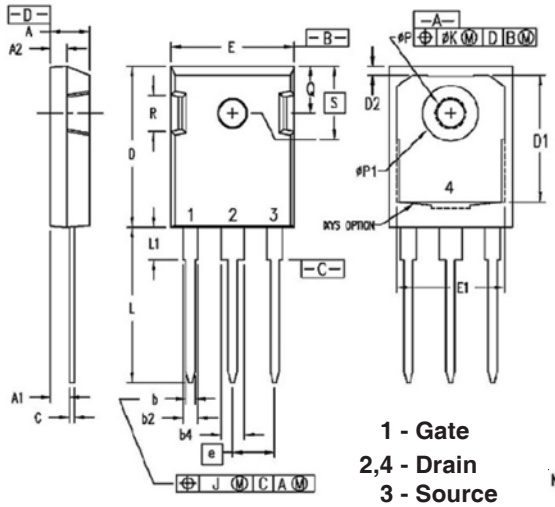

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b2	.075	.087	1.91	2.20
b4	.115	.126	2.92	3.20
C	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
D1	.650	.690	16.51	17.53
D2	.035	.050	0.89	1.27
E	.620	.635	15.75	16.13
E1	.545	.565	13.84	14.35
e	.215 BSC		5.45 BSC	
J	--	.010	--	0.25
K	--	.025	--	0.64
L	.780	.810	19.81	20.57
L1	.150	.170	3.81	4.32
øP	.140	.144	3.55	3.65
øP1	.275	.290	6.99	7.37
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83
S	.242 BSC		6.15 BSC	

NOTE: This drawing will meet all dimensions requirement of JEDEC outlines TO-247 AD (R-PSIP-FJ)

TO-264P Outline

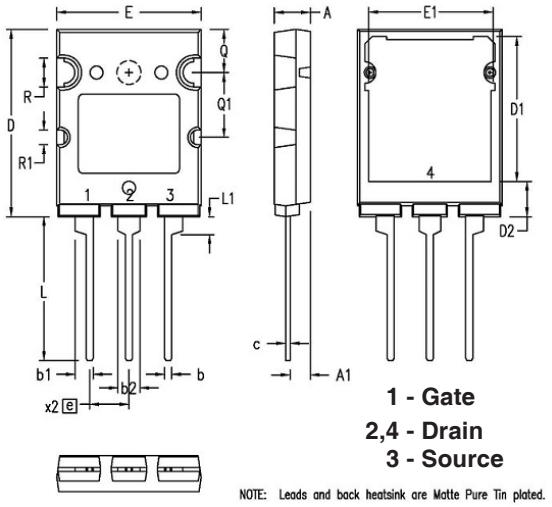

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.209	4.70	5.30
A1	.102	.118	2.60	3.00
b	.035	.049	0.90	1.25
b1	.091	.106	2.30	2.70
b2	.110	.126	2.80	3.20
c	.020	.033	0.50	0.85
D	1.012	1.035	25.70	26.30
D1	.783	.799	19.90	20.30
D2	.185	.205	4.70	5.20
E	.776	.799	19.70	20.30
E1	.661	.677	16.80	17.20
e	.215 BSC		5.46 BSC	
L	.768	.807	19.50	20.50
L1	.091	.106	2.30	2.70
Q	.228	.244	5.80	6.20
Q1	.346	.362	8.80	9.20
øR	.150	.165	3.80	4.20
øR1	.071	.087	1.80	2.20

NOTE: Leads and back heatsink are Matte Pure Tin plated.



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

©2019 IXYS CORPORATION, All Rights Reserved