



MICROWAVE CORPORATION v02.0607



OBSOLETE PRODUCT

HMC410MS8G / 410MS8GE

GaAs MMIC DOUBLE-BALANCED HIGH IP3 MIXER, 9 - 15 GHz

Typical Applications


The HMC410MS8G / HMC410MS8GE is ideal for:

- Long Haul Radio Platforms
- Microwave Radio
- VSAT

Features

Conversion Loss: 8 dB
LO/Rf Isolation: 40 dB
LO/IF Isolation: 37 dB
Input IP3: +24 dBm
No External Components
MSOP8G SMT Package

Functional Diagram

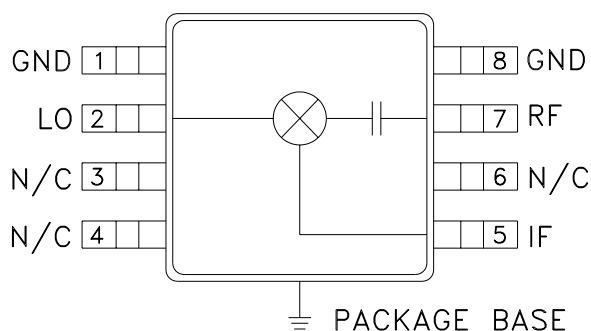

General Description

The HMC410MS8G & HMC410MS8GE are passive double balanced high IP3 mixers that operate between 9 GHz and 15 GHz. The HMC410MS8G & HMC410MS8GE operate with LO drive levels between +13 dBm and +19 dBm, and provide 8 dB conversion loss across the entire specified frequency band. These mixers require no external components or bias.

Electrical Specifications, $T_A = +25^\circ\text{C}$

Parameter	IF = 1.45 GHz LO = +17 dBm			Units
	Min.	Typ.	Max.	
Frequency Range, RF & LO	9.0 - 15.0			GHz
Frequency Range, IF	DC - 2.5			GHz
Conversion Loss		8	11	dB
Noise Figure (SSB)		8	11	dB
LO to RF Isolation	30	40 - 45		dB
LO to IF Isolation	30	37		dB
RF to IF Isolation	8	17		dB
IP3 (Input)	20	24		dBm
1 dB Compression (Input)	11	14		dBm

* Unless otherwise noted, all measurements performed as downconverter, IF= 1.45 GHz.



MICROWAVE CORPORATION v02.0607




OBSOLETE PRODUCT


HMC410MS8G / 410MS8GE

**GaAs MMIC DOUBLE-BALANCED
HIGH IP3 MIXER, 9 - 15 GHz**


**Conversion Gain vs.
Temperature @ LO = +17 dBm**

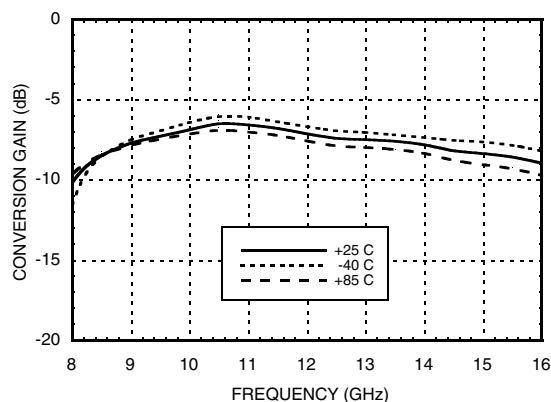


Isolation @ LO = +17 dBm

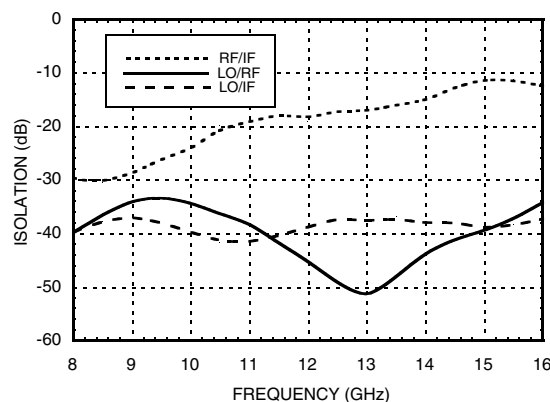


Conversion Gain vs. LO Drive

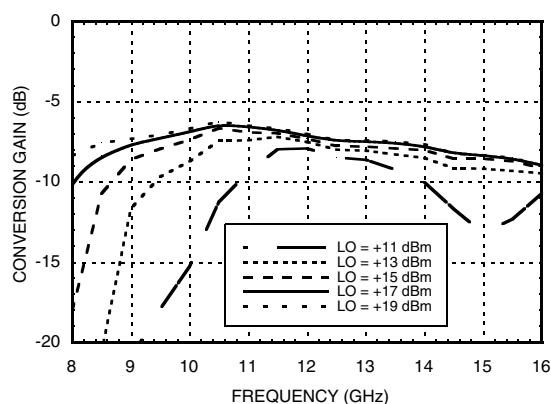


Return Loss @ LO = +17 dBm

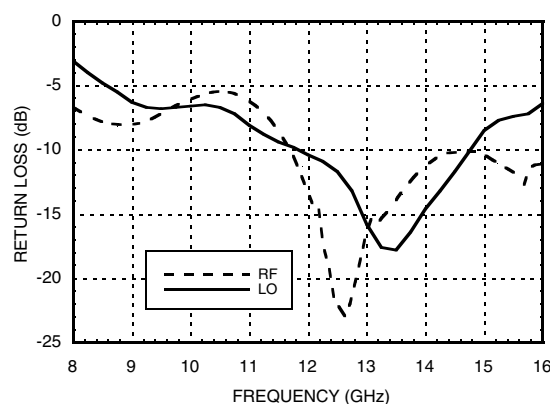

IF Bandwidth @ LO = +17 dBm

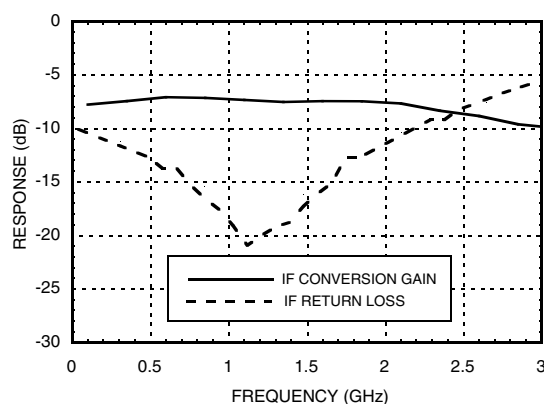

**Upconverter Performance
Conversion Gain @ LO = +17 dBm**

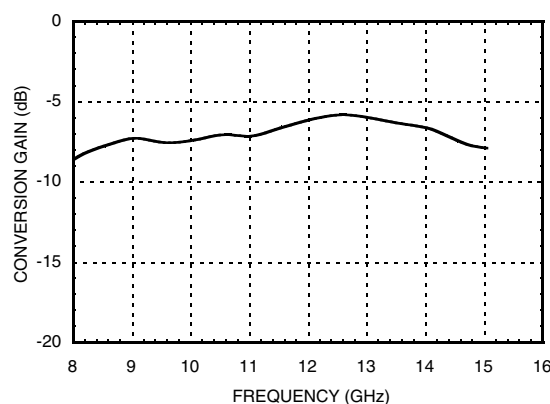



MICROWAVE CORPORATION v02.0607




OBSOLETE PRODUCT


HMC410MS8G / 410MS8GE

GaAs MMIC DOUBLE-BALANCED HIGH IP3 MIXER, 9 - 15 GHz


Input IP3 vs. LO Drive*

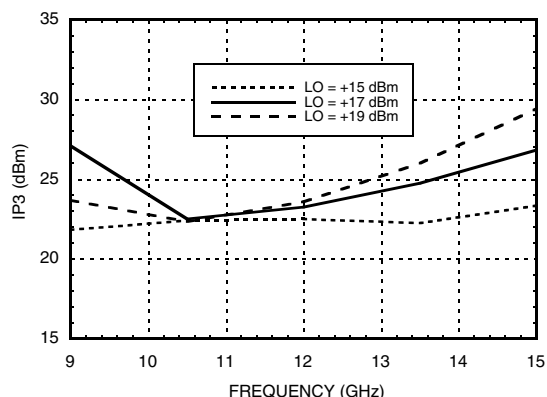


Input IP3 vs. Temperature @ LO = +17 dBm*

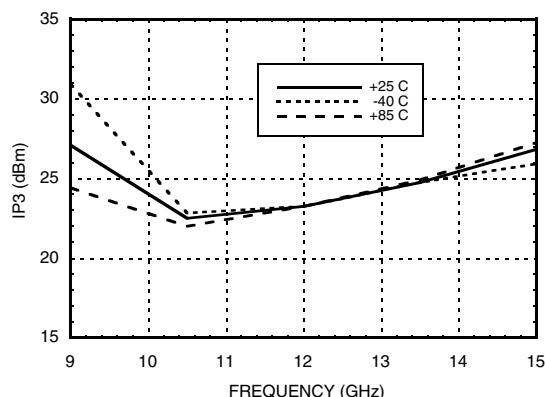

Input IP2 vs. LO Drive *

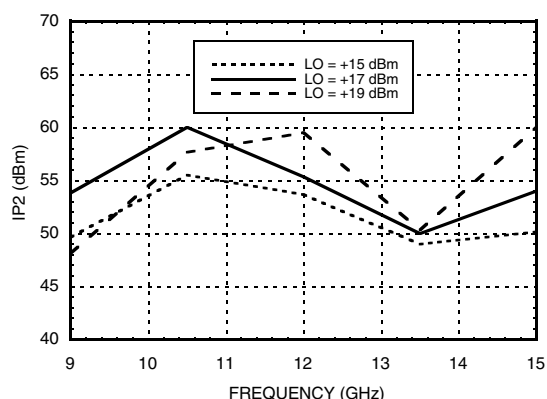

Input P1dB vs. Temperature @ LO = +17 dBm

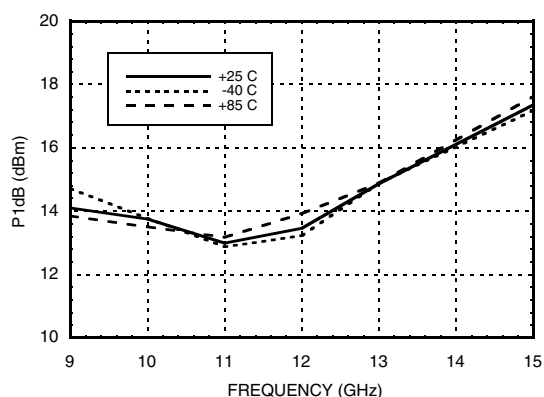

MxN Spurious @ IF Port

mRF	nLO				
	0	1	2	3	4
0	XX	4	28	23	N/A
1	15	0	40	62	46
2	85	70	67	78	83
3	>90	>90	>90	79	>90
4	N/A	>90	>90	>90	>90

RF = 14.45 GHz @ -10 dBm
LO = 13 GHz @ +17 dBm
All values in dBc relative to the IF power level.
Measured as downconverter.

Harmonics of LO

LO Freq. (GHz)	nLO Spur @ RF Port			
	1	2	3	4
9	34	28	46	60
10.5	37	37	50	69
12	44	45	46	60
13.5	47	46	62	N/A
15	40	56	58	N/A
16.5	34	47	51	N/A

LO = +17 dBm
All values in dBc below input LO level @ RF port.

* Two-tone input power = 0 dBm each tone, 1 MHz spacing.

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824
Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com
Application Support: Phone: 978-250-3343 or apps@hittite.com



MICROWAVE CORPORATION v02.0607



OBSOLETE PRODUCT

HMC410MS8G / 410MS8GE

**GaAs MMIC DOUBLE-BALANCED
HIGH IP3 MIXER, 9 - 15 GHz**


Absolute Maximum Ratings

RF / IF Input	+20 dBm
LO Drive	+27 dBm
IF DC Current	±4 mA
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

Outline Drawing

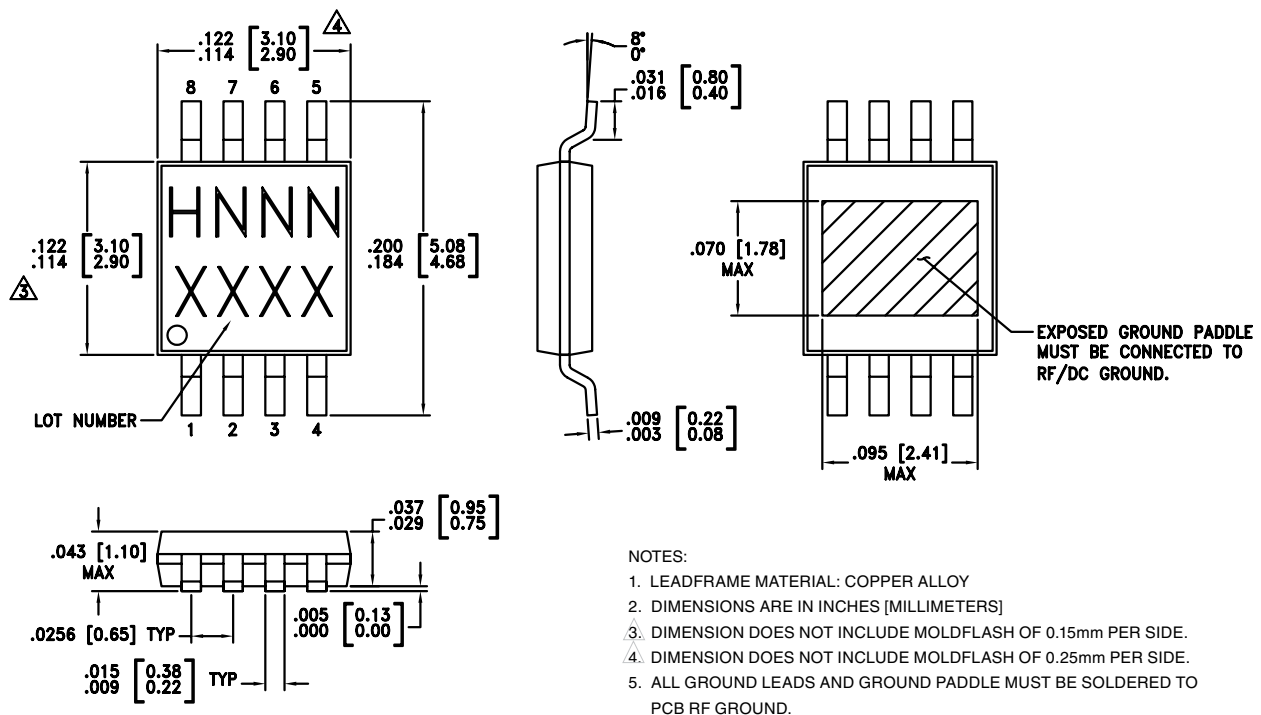

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC410MS8G	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	H410 XXXX
HMC410MS8GE	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	H410 XXXX

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com



MICROWAVE CORPORATION v02.0607


**OBSOLETE PRODUCT****HMC410MS8G / 410MS8GE**

**GaAs MMIC DOUBLE-BALANCED
HIGH IP3 MIXER, 9 - 15 GHz**

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1, 8	GND	Pins and exposed ground slug must be connected to RF ground.	
2	LO	This pin is AC coupled & matched to 50 Ohms from 9.0 to 15.0 GHz.	
3, 4, 6	N/C	Not connected.	
5	IF	This pin is DC coupled. For applications not requiring operation to DC this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source/sink more than 4mA of current or die non-function and possible die failure will result.	
7	RF	This pin is DC coupled & matched to 50 Ohms from 9.0 to 15.0 GHz.	

Evaluation PCB

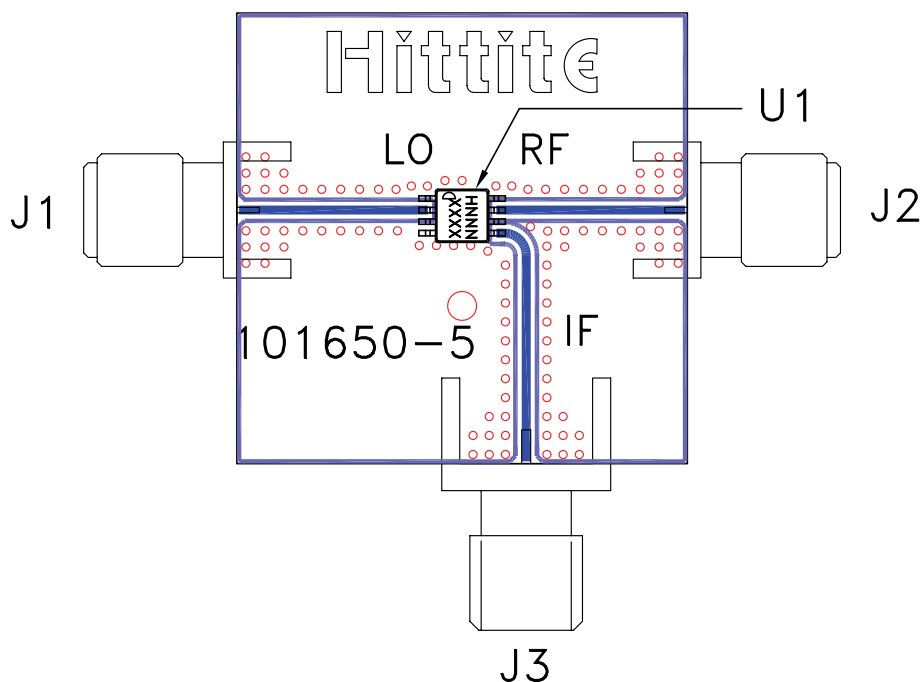

List of Materials for Evaluation PCB 103350 [1]

Item	Description
J1 - J2	PCB Mount SMA RF Connector, SRI
J3	PCB Mount SMA Connector, Johnson
U1	HMC410MS8G / HMC410MS8GE
PCB [2]	101650 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.