

APTGT35A120T1G

Phase leg
Fast Trench + Field Stop IGBT® Power Module

V_{CES} = 1200V
I_C = 35A @ Tc = 80°C

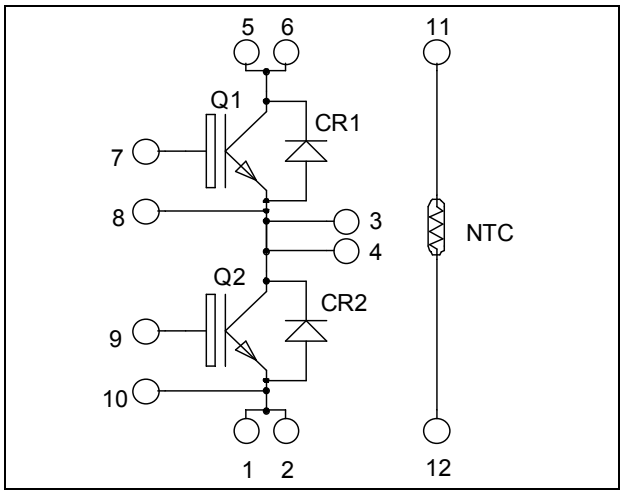

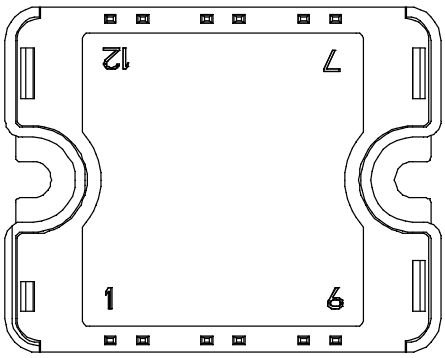

Pins 1/2 ; 3/4 ; 5/6 must be shorted together

Application

- Welding converters
- Switched Mode Power Supplies
- Uninterruptible Power Supplies
- Motor control

Features

- Fast Trench + Field Stop IGBT® Technology
  - Low voltage drop
  - Low tail current
  - Switching frequency up to 20 kHz
  - Soft recovery parallel diodes
  - Low diode VF
  - Low leakage current
  - RBSOA and SCSOA rated
- Very low stray inductance
  - Symmetrical design
- Internal thermistor for temperature monitoring
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- RoHS Compliant

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{CES}	Collector - Emitter Breakdown Voltage		1200	V
I_C	Continuous Collector Current	T_C = 25°C	55	A
		T_C = 80°C	35	
I_{CM}	Pulsed Collector Current	T_C = 25°C	70	
V_{GE}	Gate – Emitter Voltage		±20	V
P_D	Maximum Power Dissipation	T_C = 25°C	208	W
RBSOA	Reverse Bias Safe Operating Area	T_j = 125°C	70A@1150V	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

All ratings @ T_j = 25°C unless otherwise specified

Electrical Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
I_{CES}	Zero Gate Voltage Collector Current	V_{GE} = 0V, V_{CE} = 1200V	T_j = 25°C			250	µA
			T_j = 125°C			500	
$V_{CE(sat)}$	Collector Emitter saturation Voltage	V_{GE} = 15V, I_C = 35A	T_j = 25°C		1.7	2.1	V
			T_j = 125°C		2.0		
$V_{GE(th)}$	Gate Threshold Voltage	$V_{GE} = V_{CE}$, I_C = 1.5mA		5.0	5.8	6.5	V
I_{GES}	Gate – Emitter Leakage Current	V_{GE} = 20V, V_{CE} = 0V				400	nA

Dynamic Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
C_{ies}	Input Capacitance	V_{GE} = 0V, V_{CE} = 25V, f = 1MHz			2.5		nF
C_{res}	Reverse Transfer Capacitance				0.15		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (25°C), V_{GE} = ±15V, V_{Bus} = 600V, I_C = 35A, R_G = 27Ω			90		ns
T_r	Rise Time				30		
$T_{d(off)}$	Turn-off Delay Time				420		
T_f	Fall Time				70		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (125°C), V_{GE} = ±15V, V_{Bus} = 600V, I_C = 35A, R_G = 27Ω			90		ns
T_r	Rise Time				50		
$T_{d(off)}$	Turn-off Delay Time				520		
T_f	Fall Time				90		
E_{on}	Turn-on Switching Energy	V_{GE} = ±15V, V_{Bus} = 600V, I_C = 35A, R_G = 27Ω	T_j = 125°C		3.5		mJ
E_{off}	Turn-off Switching Energy		T_j = 125°C		4.1		

Reverse diode ratings and characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
V_{RRM}	Maximum Peak Repetitive Reverse Voltage			1200			V
I_{RM}	Maximum Reverse Leakage Current	V_R=1200V	T_j = 25°C			250	µA
			T_j = 125°C			500	
I_F	DC Forward Current		Tc = 80°C		35		A
V_F	Diode Forward Voltage	I_F = 35A	T_j = 25°C		1.6	2.1	V
			T_j = 125°C		1.6		
t_{rr}	Reverse Recovery Time	I_F = 35A, V_R = 600V, di/dt =1500A/µs	T_j = 25°C		170		ns
			T_j = 125°C		280		
Q_{rr}	Reverse Recovery Charge		T_j = 25°C		3.5		µC
			T_j = 125°C		7		
Er	Reverse Recovery Energy		T_j = 25°C		1.4		mJ
			T_j = 125°C		2.7		

Thermal and package characteristics

Symbol	Characteristic			Min	Typ	Max	Unit
R_{thJC}	Junction to Case Thermal Resistance		IGBT			0.60	°C/W
			Diode			0.95	
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, I isol<1mA, 50/60Hz			2500			V
T_J	Operating junction temperature range			-40		150	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To heatsink	M4	2.5		4.7	N.m
Wt	Package Weight					80	g


Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).

Symbol	Characteristic	Min	Typ	Max	Unit
R_{25}	Resistance @ 25°C		50		kΩ
$B_{25/85}$	T_{25} = 298.15 K		3952		K

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$


T: Thermistor temperature
R_T: Thermistor value at T


SP1 Package outline (dimensions in mm)

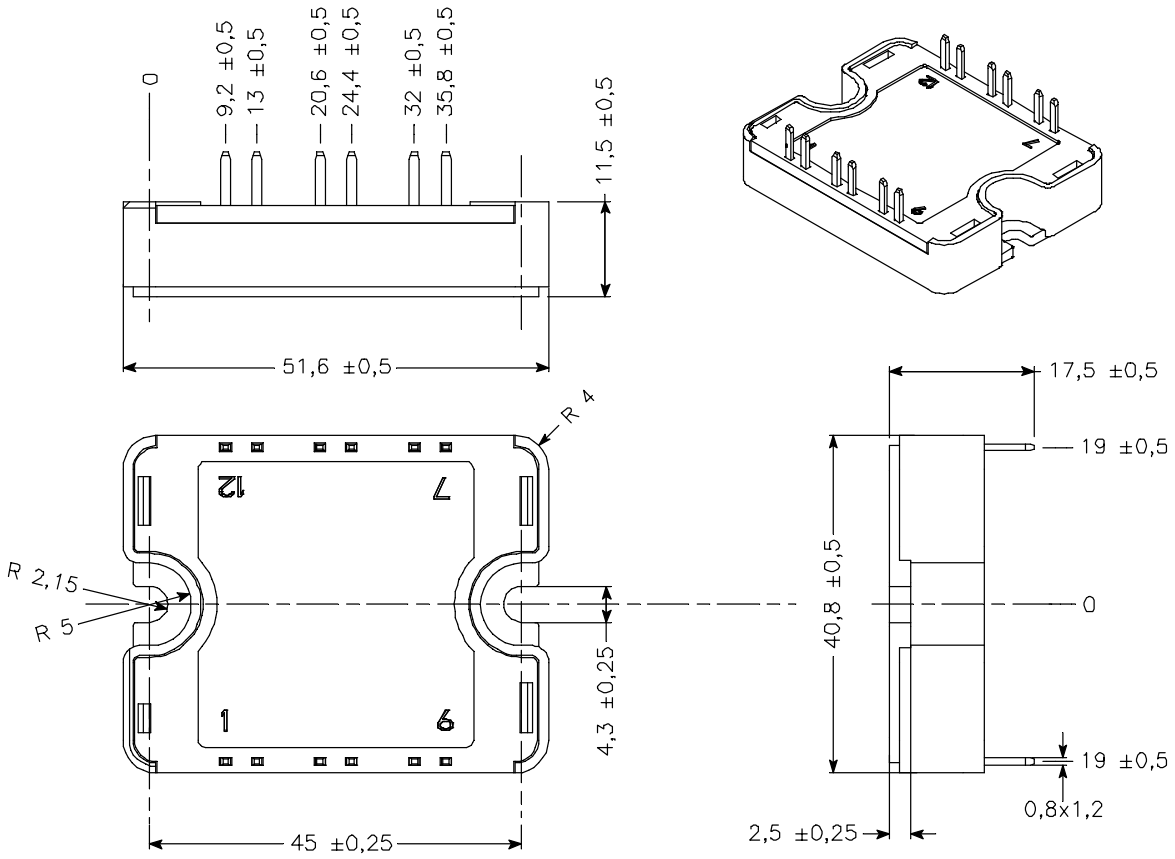



See application note 1904 - Mounting Instructions for SP1 Power Modules on www.microsemi.com


Typical Performance Curve

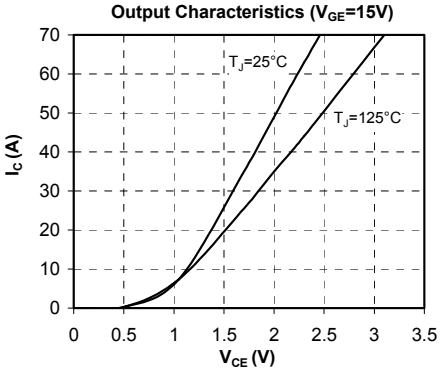


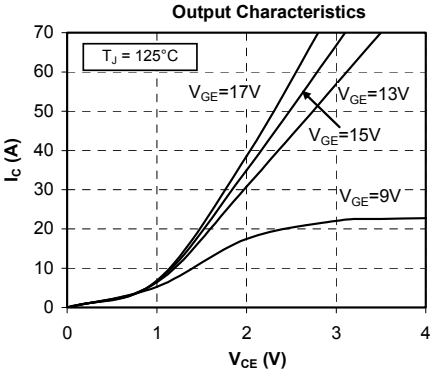


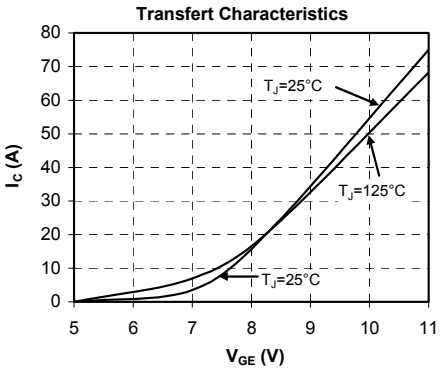


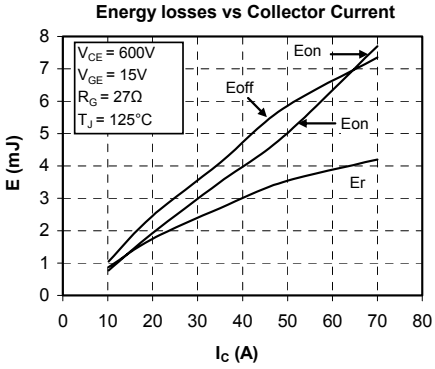


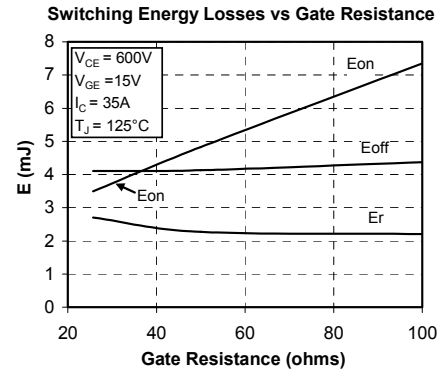


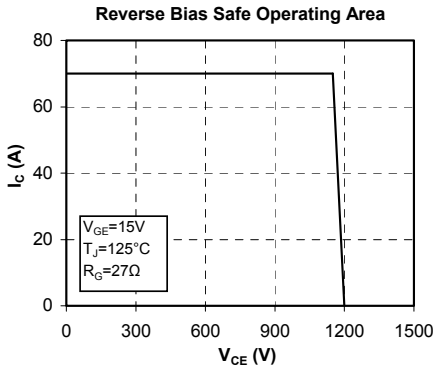

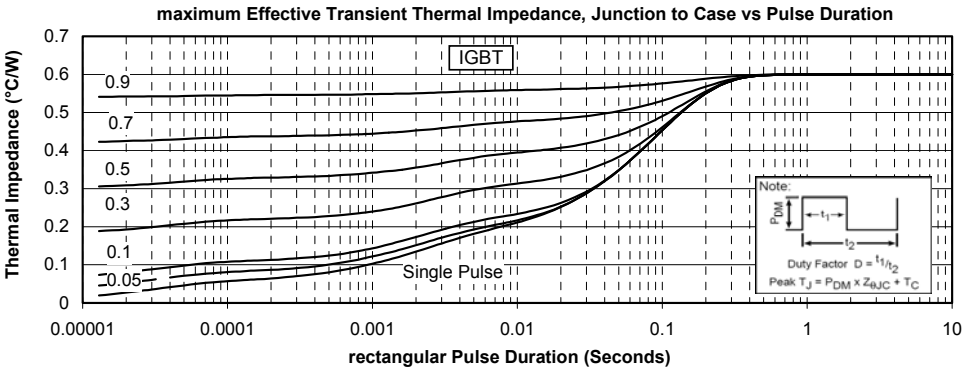

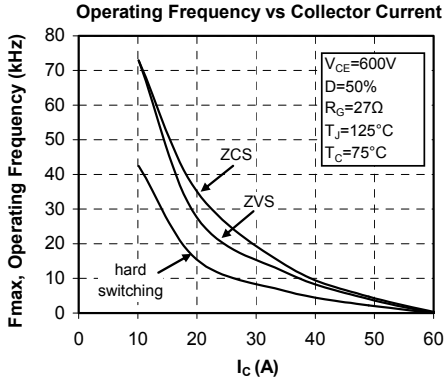

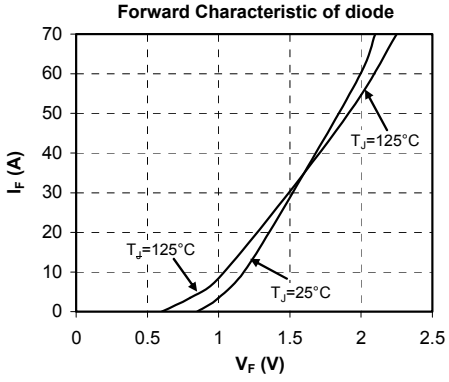

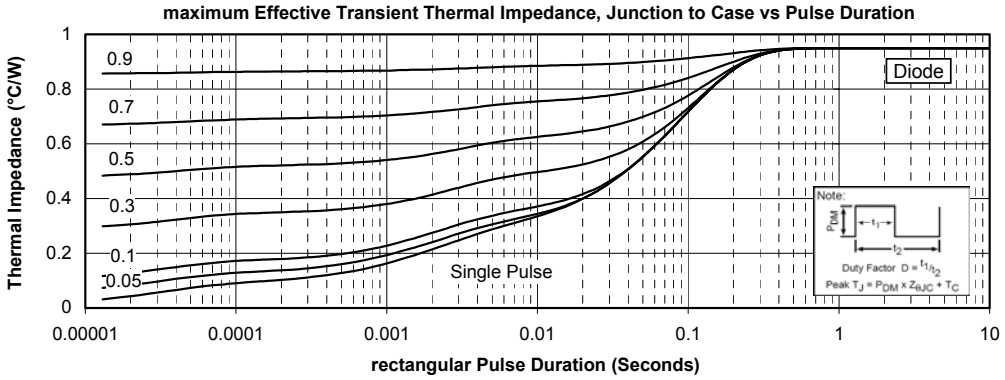

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522
5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.