



## 0501




**0501-0-15-XX-30-XX-04-0**  
Press-fit in 1,45 mounting hole

## 8427

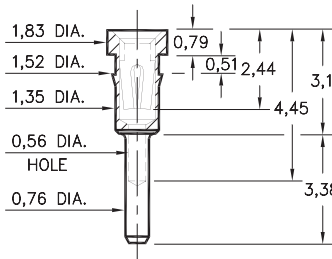


**8427-0-15-XX-30-XX-04-0**  
Press-fit in 1,45 mounting hole

## 1434

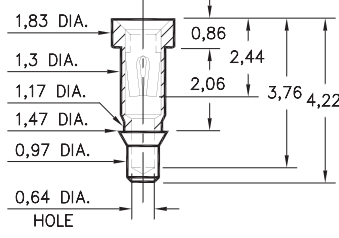


**1434-0-15-XX-30-XX-10-0**  
Press-fit in 1,4 mounting hole

## 9970

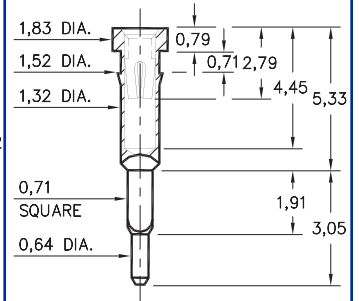

**9970-0-15-XX-30-XX-04-0**  
Square press-fit for 0,81 ±0,05 plated thru hole


## 5970



**5970-X-15-XX-32-XX-04-0**  
Square press-fit for 0,81 or 1,0 ±0,05 plated thru hole

| Basic Part Number | U Square | Mounting Hole |
|-------------------|----------|---------------|
| 5970-1            | 0,71     | 0,81          |
| 5970-2            | 0,86     | 1,0           |


## 0477/0478



**047X-0-18-XX-30-XX-04-0**  
Solderless press-fit in 0,97 +0,08 / -0,05 plated thru hole (use 1.1mm drill prior to plating)


| Basic Part Number | Board Thickness | Length V | Length A |
|-------------------|-----------------|----------|----------|
| 0477-0            | 1,57            | 1,91     | 4,45     |
| 0478-0            | 3,18            | 3,56     | 6,35     |

## 4612




**4612-0-31-XX-30-XX-04-0**  
Compliant press-fit in 1,02 ±0,08 plated hole. For 1,52 → 2,54 thick board

## 4613




**4613-0-31-XX-30-XX-04-0**  
Compliant press-fit in 1,02 ±0,08 plated hole. For 2,29 → 3,30 thick board

## 0680

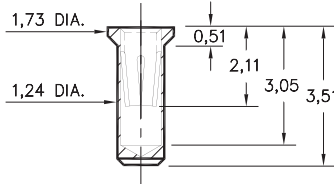

**0680-0-15-XX-32-XX-10-0**  
Solder mount in 1,3 min. mounting hole  
Also available on 16mm wide carrier tape: 1,700 parts per 330mm reel.  
Order as: 0680-0-57-XX-32-XX-10-0

## 0149

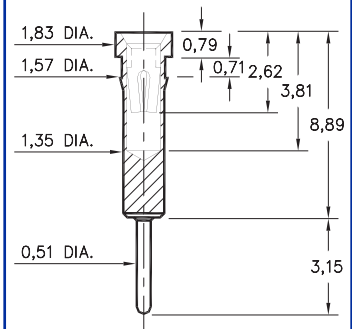

**0149-0-15-XX-30-XX-04-0**  
Press-fit in 1,5 mounting hole

### SPECIFICATIONS

**SHELL MATERIAL:**  
Brass Alloy 360, 1/2 Hard

**CONTACT MATERIAL:**  
Beryllium Copper Alloy 172, HT

**DIMENSION IN INCHES**  
**TOLERANCES ON:**  
LENGTHS: ±0,13  
DIAMETERS: ±0,05  
ANGLES: ± 2°

**ORDER CODE: XXXX - X - XX - XX - XX - XX - 0**

**BASIC PART #**

**SPECIFY SHELL FINISH:**

- 01 5,08µm TIN/LEAD OVER NICKEL
- ◇ 80 5,08µmTIN OVER NICKEL (RoHS)
- ◇ 15 0,25µm GOLD OVER NICKEL (RoHS)



**SPECIFY CONTACT FINISH:**

- 02 2,54µm TIN/LEAD OVER NICKEL
- ◇ 84 2,54µm TIN OVER NICKEL (RoHS)
- ◇ 27 0,76µm GOLD OVER NICKEL (RoHS)

**SELECT CONTACT**

#30 or #32 CONTACT (DATA ON PAGE 219)