

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015910180](#)
Status: **Active**
Description: 2.54mm (.100") Pitch C-Grid® Header, Surface Mount, Dual Row, Vertical, 18 Circuits, 0.38µm (15µ") Gold (Au) Selective Plating

Documents:

3D Model	Product Specification PS-71308 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Packaging Specification (PDF)	

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71308
Application	Board-to-Board, Wire-to-Board
Product Name	C-Grid®

Physical


Breakaway	Yes
Circuits (Loaded)	18
Circuits (maximum)	18
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	15.2
Plating min: Mating (µm)	0.38
Plating min: Termination (µin)	80
Plating min: Termination (µm)	2
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	3A
Voltage - Maximum	250V

Solder Process Data

Lead-free Process Capability	Reflow Capable (SMT only)
------------------------------	---------------------------



*Series
image - Reference only*

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[71308Series](#)


Process Temperature max. C	260
Material Info	
Old Part Number	71308-0118N
Reference - Drawing Numbers	
Product Specification	PS-71308, RPS-71308-001
Sales Drawing	SD-71308-001

This document was generated on 04/09/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

OPTIONAL PICK AND PLACE CAP

SEE NOTES 4 & 9.

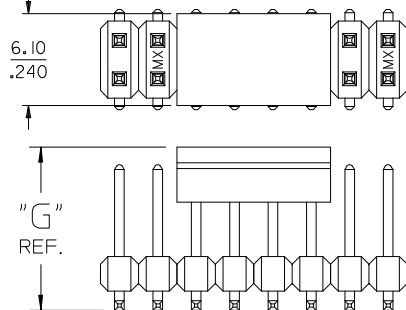


PEG OPTIONS

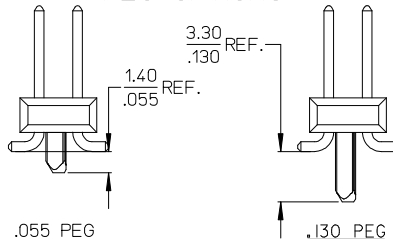

NOTES:



- MATERIALS: INSULATOR: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL94 V-0, COLOR: BLACK
TERMINAL: COPPER ALLOY
- FINISH:
59 TIN - 0.00150/.000059 MINIMUM BRIGHT TIN OVER NICKEL OVERALL.
150 TIN - 0.00381/.000150 MINIMUM BRIGHT TIN OVER NICKEL OVERALL.
15 GOLD - 0.00038/.000015 MINIMUM GOLD IN SELECT AREA OVER 0.00191/.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
30 GOLD - 0.00076/.000030 MINIMUM GOLD IN SELECT AREA OVER 0.00191/.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
50 GOLD - 0.00127/.000050 MINIMUM GOLD IN SELECT AREA OVER 0.00254/.000100 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
* THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.
- PART TO CONFORM TO PS-71308.
- PACKAGING (SEE CHARTS):
BULK: PER PK-70873-0353
TUBES: PER PK-70873-0041.
71308-82** IN TUBES: PER PK-70873-042.
TUBES W/ VAC CAPS: PER PK-70873-0691
TAPE AND REEL W/ VAC CAPS: PER PK-70873-0805.
SEE SHEET 3 FOR TAPE & REEL PRODUCT WITH SHALLOW POCKET REQUIREMENTS.
- TYP. DIMENSIONS FOR LANDS SURROUNDING HOLES FOR RETENTION PEGS.
- PIN SOLERABILITY PER MOLEX SPEC. ES-152.
- SEE SHEETS 2-5 FOR CHARTED DIMS., PART/EDP NO'S, AND VOIDED CIRCUITS.
- PIN PUSHOUT FORCE: 3 LBS. MINIMUM.
- PICK-N-PLACE CAPS WILL BE PLACED SO THAT VACUUM PICK UP AREA WILL BE IN CENTER OF PART.
- COPLANARITY FOR CIRCUIT SIZES UP TO 40 IS 0.15 MM/.006 INCH. FOR CIRCUIT SIZES 42 AND LARGER, CONTACT MOLEX SALES DEPARTMENT.
- THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

DIM. "M"	DIM. "G"
6.10 .240	10.67 .420
8.13 .320	12.70 .500

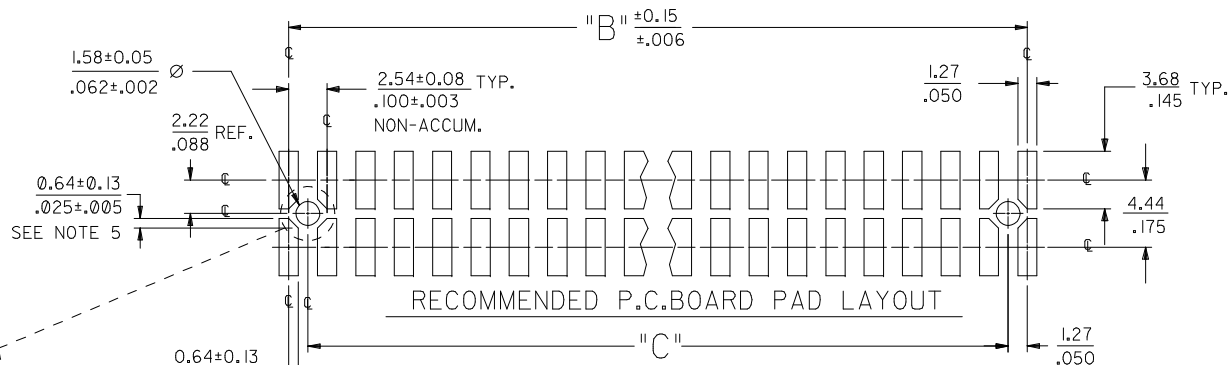

P.C. BOARD PAD LAYOUT
AT ENDS FOR NO PEG VERSION.

ROW "A"
ROW "B"

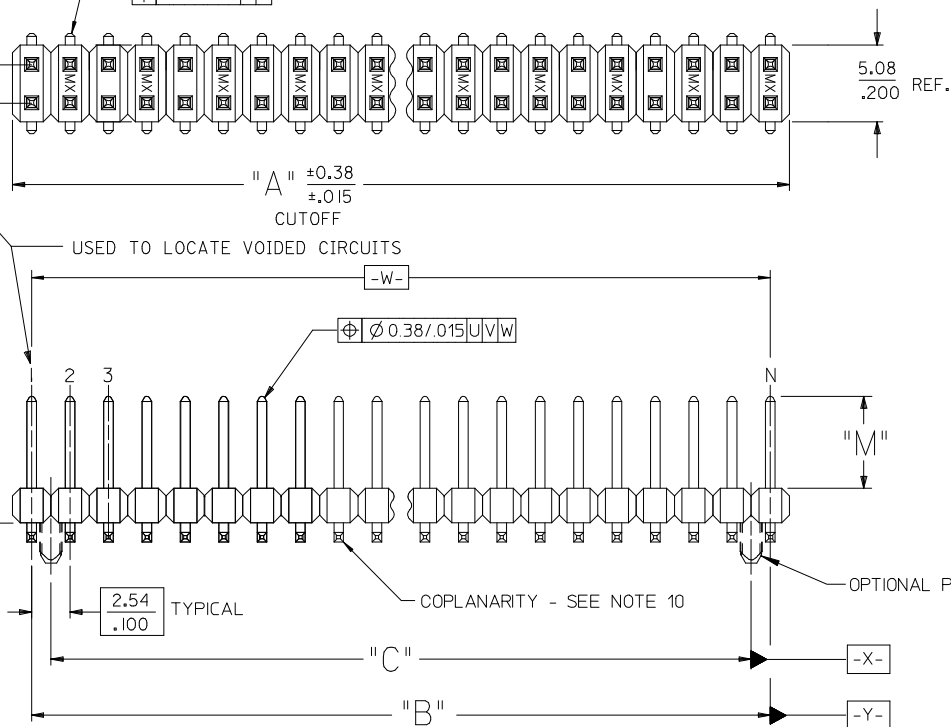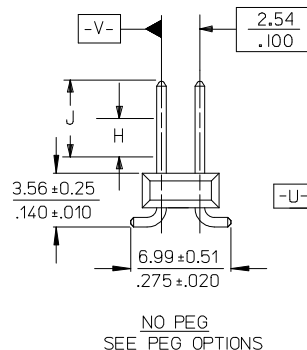

12CKT TAPE & REEL		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: UCP2009-2465		DESCRIPTION		mm		MM/IN		INCH		INCH		INCH	
2009/08/04		DRAWN: KIPPER		±---		KMS		DATE		DATE		DATE	
2009/08/07		CHKD: SSOUSEK		±.005		KMS		DATE		DATE		DATE	
2009/08/10		APPR: FSMITH		±.010		KMS		DATE		DATE		DATE	
K3		REV		±.025		KMS		DATE		DATE		DATE	
				ANGULAR ±1/2°		MATERIAL NO.		SEE TABLES		DOCUMENT NO.		SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1 OF 6	

13		12		11				10		9		8		7		6		5		4		3		2		1			
J		PACKAGING SEE NOTE 4, SHT 1				IN TAPE AND REEL WITH SHALLOW POCKET TAPE								BULK / IN TUBES															
						4-8 CKT		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS						BULK						BULK							
						10-100 CKT		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS						TUBES						TUBES							
						DIM. M±0.25 MM				6.10 (.240)		6.10 (.240)										8.13 (.320)		13.59 (.535)					
						PLATING				30 GOLD		15 GOLD										150 TIN		150 TIN					
						DIM. H				2.54 (.100)		2.54 (.100)										4.57 (.180)		4.57 (.180)					
I		DIM. J				5.08 (.200)		5.08 (.200)						7.11 (.280)		7.11 (.280)													
		EDP NUMBER		EDP NUMBER						EDP NUMBER		EDP NUMBER		CKTS															
H		04		5.08		.200		2.54		.100																04			
		06		7.62		.300		5.08		.200				015-91-6068												06			
		08		10.16		.400		7.62		.300				015-91-6088												08			
		10		12.70		.500		10.16		.400				015-91-6108						713088010		71308-8210				10			
		12		15.24		.600		12.70		.500																12			
		14		17.78		.700		15.24		.600		015-91-6148														14			
		16		20.32		.800		17.78		.700										713088016						16			
		18		22.86		.900		20.32		.800																18			
		20		25.40		1.000		22.86		.900																20			
		22		27.94		1.100		25.40		1.000																22			
		24		30.48		1.200		27.94		1.100																24			
		26		33.02		1.300		30.48		1.200																26			
G		28		35.56		1.400		33.02		1.300																28			
		30		38.10		1.500		35.56		1.400																30			
		32		40.64		1.600		38.10		1.500																32			
		34		43.18		1.700		40.64		1.600																34			
		36		45.72		1.800		43.18		1.700																36			
		38		48.26		1.900		45.72		1.800																38			
		40		50.80		2.000		48.26		1.900																40			
		42		53.34		2.100		50.80		2.000																42			
F		44		55.88		2.200		53.34		2.100																44			
		46		58.42		2.300		55.88		2.200																46			
		48		60.96		2.400		58.42		2.300																48			
		50		63.50		2.500		60.96		2.400																50			
		52		66.04		2.600		63.50		2.500																52			
		54		68.58		2.700		66.04		2.600																54			
		56		71.12		2.800		68.58		2.700																56			
		58		73.66		2.900		71.12		2.800																58			
E		60		76.20		3.000		73.66		2.900																60			
		62		78.74		3.100		76.20		3.000																62			
		64		81.28		3.200		78.74		3.100																64			
		66		83.82		3.300		81.28		3.200																66			
		68		86.36		3.400		83.82		3.300																68			
		70		88.90		3.500		86.36		3.400																70			
		72		91.44		3.600		88.90		3.500																72			
		74		93.98		3.700		91.44		3.600																74			
D		76		96.52		3.800		93.98		3.700																76			
		78		99.06		3.900		96.52		3.800																78			
		80		101.60		4.000		99.06		3.900																80			
		82		104.14		4.100		101.60		4.000																82			
		84		106.68		4.200		104.14		4.100																84			
		86		109.22		4.300		106.68		4.200																86			
		88		111.76		4.400		109.22		4.300																88			
		90		114.30		4.500		111.76		4.400																90			
C		92		116.84		4.600		114.30		4.500																92			
		94		119.38		4.700		116.84		4.600																94			
		96		121.92		4.800		119.38		4.700																96			
		98		124.46		4.900		121.92		4.800																98			
		100		127.00		5.000		124.46		4.900																100			
B		NO PEG VERSION (ALSO SEE SHEET 2)										SEE SHEET 1 EC NO: UCP2009-2465 DRWN:MKIPPER 2009/08/04 CHKD:SSOUSEK 2009/08/07 APPR:FSMITH 2009/08/10		QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE INCH		DESIGN UNITS INCH		THIRD ANGLE PROJECTION		SALES ASSY INSULATOR DUAL ROW SMT W/BREAK-OFF .025SQ PIN GULLWING .100 MOLEX INCORPORATED		SHEET NO. 3 OF 6	
																DRAWN BY KMS		DATE 1999/10/15		CHECKED BY KMS		DATE 1999/10/15		APPROVED BY KMS					
A		K3		REV		DESCRIPTION		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
1b_frame_C_P_AM_T Rev. E 2006/04/15		12		11		10		9		8		7		6		5		4		3		2		1					

13			12			11			10			9			8			7			6			5			4			3			2			1		
PACKAGING SEE NOTE 4 SHT 1						4-8 CKT		BULK		TAPE-N-REEL W/ VAC CAPS		BULK		TAPE-N-REEL W/ VAC CAPS		BULK		TAPE-N-REEL W/ VAC CAPS		BULK		BULK		BULK														
						10-100 CKT		TUBES		TAPE-N-REEL W/ VAC CAPS		TUBES		TAPE-N-REEL W/ VAC CAPS		TUBES		TAPE-N-REEL W/ VAC CAPS		TUBES		TUBES		TUBES														
						DIM. M ±0.25 MM						6.10 (.240)						6.10 (.240)						6.10 (.240)						8.13 (.320)		8.13 (.320)		8.13 (.320)				
						PLATING						150 TIN						15 GOLD						30 GOLD						150 TIN		15 GOLD		30 GOLD				
						DIM. H						2.54 (.100)						2.54 (.100)						2.54 (.100)						4.57 (.180)		4.57 (.180)		4.57 (.180)				
DIM. J						5.08 (.200)						5.08 (.200)						5.08 (.200)						7.11 (.280)		7.11 (.280)		7.11 (.280)										
CKTS	DIM. A		DIM. B		DIM. C		EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	CKTS								
	MM	IN	MM	IN	MM	IN																																
04	5.08	.200	2.54	.100	----	----	015-91-1041	015-91-6044	015-91-1042	015-91-6045	015-91-1043	015-91-6046	015-91-1044	015-91-0047	015-91-1040			04																				
06	7.62	.300	5.08	.200	2.54	.100	015-91-1061	015-91-6064	015-91-1062	015-91-6065	015-91-1063	015-91-6066	015-91-1064	015-91-0067	015-91-1060			06																				
08	10.16	.400	7.62	.300	5.08	.200	015-91-1081	015-91-6084	015-91-1082	015-91-6085	015-91-1083	015-91-6086	015-91-1084	015-91-0087	015-91-1080			08																				
10	12.70	.500	10.16	.400	7.62	.300	015-91-1101	015-91-6104	015-91-1102	015-91-6105	015-91-1103	015-91-6106	015-91-1104	015-91-0107	015-91-1100			10																				
12	15.24	.600	12.70	.500	10.16	.400	015-91-1121		015-91-1122		015-91-1123		015-91-1124	015-91-0127	015-91-1120			12																				
14	17.78	.700	15.24	.600	12.70	.500	015-91-1141	015-91-6144	015-91-1142	015-91-6145	015-91-1143	015-91-6146	015-91-1144	015-91-0147	015-91-1140			14																				
16	20.32	.800	17.78	.700	15.24	.600	015-91-1161	015-91-6164	015-91-1162	015-91-6165	015-91-1163	015-91-6166	015-91-1164	015-91-0167	015-91-1160			16																				
18	22.86	.900	20.32	.800	17.78	.700	015-91-1181		015-91-1182		015-91-1183		015-91-1184	015-91-0187	015-91-1180			18																				
20	25.40	1.000	22.86	.900	20.32	.800	015-91-1201		015-91-1202		015-91-1203		015-91-1204	015-91-0207	015-91-1200			20																				
22	27.94	1.100	25.40	1.000	22.86	.900	015-91-1221		015-91-1222		015-91-1223		015-91-1224	015-91-0227	015-91-1220			22																				
24	30.48	1.200	27.94	1.100	25.40	1.000	015-91-1241		015-91-1242		015-91-1243		015-91-1244	015-91-0247	015-91-1240			24																				
26	33.02	1.300	30.48	1.200	27.94	1.100	015-91-1261		015-91-1262		015-91-1263		015-91-1264	015-91-0267	015-91-1260			26																				
28	35.56	1.400	33.02	1.300	30.48	1.200	015-91-1281		015-91-1282		015-91-1283		015-91-1284	015-91-0287	015-91-1280			28																				
30	38.10	1.500	35.56	1.400	33.02	1.300	015-91-1301		015-91-1302		015-91-1303		015-91-1304	015-91-0307	015-91-1300			30																				
32	40.64	1.600	38.10	1.500	35.56	1.400	015-91-1321		015-91-1322		015-91-1323		015-91-1324	015-91-0327	015-91-1320			32																				
34	43.18	1.700	40.64	1.600	38.10	1.500	015-91-1341		015-91-1342		015-91-1343		015-91-1344	015-91-0347	015-91-1340			34																				
36	45.72	1.800	43.18	1.700	40.64	1.600	015-91-1361		015-91-1362		015-91-1363		015-91-1364	015-91-0367	015-91-1360			36																				
38	48.26	1.900	45.72	1.800	43.18	1.700	015-91-1381		015-91-1382		015-91-1383		015-91-1384	015-91-0387	015-91-1380			38																				
40	50.80	2.000	48.26	1.900	45.72	1.800	015-91-1401		015-91-1402		015-91-1403		015-91-1404	015-91-0407	015-91-1400			40																				
42	53.34	2.100	50.80	2.000	48.26	1.900	015-91-1421		015-91-1422		015-91-1423		015-91-1424	015-91-0427	015-91-1420			42																				
44	55.88	2.200	53.34	2.100	50.80	2.000	015-91-1441		015-91-1442		015-91-1443		015-91-1444	015-91-0447	015-91-1440			44																				
46	58.42	2.300	55.88	2.200	53.34	2.100	015-91-1461		015-91-1462		015-91-1463		015-91-1464	015-91-0467	015-91-1460			46																				
48	60.96	2.400	58.42	2.300	55.88	2.200	015-91-1481		015-91-1482		015-91-1483		015-91-1484	015-91-0487	015-91-1480			48																				
50	63.50	2.500	60.96	2.400	58.42	2.300	015-91-1501	015-91-6504	015-91-1502	015-91-6505	015-91-1503	015-91-6506	015-91-1504	015-91-0507	015-91-1500			50																				
52	66.04	2.600	63.50	2.500	60.96	2.400	015-91-1521		015-91-1522		015-91-1523	71308-5203	015-91-1524	015-91-0527	015-91-1520			52																				
54	68.58	2.700	66.04	2.600	63.50	2.500	015-91-1541		015-91-1542		015-91-1543		015-91-1544	015-91-0547	015-91-1540			54																				
56	71.12	2.800	68.58	2.700	66.04	2.600	015-91-1561		015-91-1562		015-91-1563		015-91-1564	015-91-0567	015-91-1560			56																				
58	73.66	2.900	71.12	2.800	68.58	2.700	015-91-1581		015-91-1582		015-91-1583		015-91-1584	015-91-0587	015-91-1580			58																				
60	76.20	3.000	73.66	2.900	71.12	2.800	015-91-1601		015-91-1602		015-91-1603		015-91-1604	015-91-0607	015-91-1600			60																				
62	78.74	3.100	76.20	3.000	73.66	2.900	015-91-1621		015-91-1622		015-91-1623		015-91-1624	015-91-0627	015-91-1620			62																				
64	81.28	3.200	78.74	3.100	76.20	3.000	015-91-1641		015-91-1642		015-91-1643		015-91-1644	015-91-0647	015-91-1640			64																				
66	83.82	3.300	81.28	3.200	78.74	3.100	015-91-1661		015-91-1662		015-91-1663		015-91-1664	015-91-0667	015-91-1660			66																				
68	86.36	3.400	83.82	3.300	81.28	3.200	015-91-1681		015-91-1682		015-91-1683		015-91-1684	015-91-0687	015-91-1680			68																				
70	88.90	3.500	86.36	3.400	83.82	3.300	015-91-1701		015-91-1702		015-91-1703		015-91-1704	015-91-0707	015-91-1700			70																				
72	91.44	3.600	88.90	3.500	86.36	3.400	015-91-1721		015-91-1722		015-91-1723		015-91-1724	015-91-0727	015-91-1720			72																				
74	93.98	3.700	91.44	3.600	88.90	3.500	015-91-1741		015-91-1742		015-91-1743		015-91-1744	015-91-0747	015-91-1740			74																				
76	96.52	3.800	93.98	3.700	91.44	3.600	015-91-1761		015-91-1762		015-91-1763		015-91-1764	015-91-0767	015-91-1760			76																				
78	99.06	3.900	96.52	3.800	93.98	3.700	015-91-1781		015-91-1782		015-91-1783		015-91-1784	015-91-0787	015-91-1780			78																				
80	101.60	4.000	99.06	3.900	96.52	3.800	015-91-1801		015-91-1802		015-91-1803		015-91-1804	015-91-0807	015-91-1800			80																				
82	104.14	4.100	101.60	4.000	99.06	3.900	71308-4082		71308-4182		71308-4282		71308-5082	71308-5182	71308-5282			82																				
84	106.68	4.200	104.14	4.100	101.60	4.000	71308-4084		71308-4184		71308-4284		71308-5084	71308-5184	71308-5284			84																				
86	109.22	4.300	106.68	4.200	104.14	4.100	71308-4086		71308-4186		71308-4286		71308-5086	71308-5186	71308-5286			86																				
88	111.76	4.400	109.22	4.300	106.68	4.200	71308-4088		71308-4188		71308-4288		71308-5088	71308-5188	71308-5288			88																				
90	114.30	4.500	111.76	4.400	109.22	4.300	71308-4090		71308-4190		71308-4290		71308-5090	71308-5190	71308-5290			90																				
92	116.84	4.600	114.30	4.500	111.76	4.400	71308-4092		71308-4192		71308-4292		71308-5092	71308-5192	71308-5292			92																				
94	119.38	4.700	116.84	4.600	114.30	4.500	71308-4094		71308-4194		71308-4294		71308-5094	71308-5194	71308-5294			94																				
96	121.92	4.800	119.38	4.700	116.84	4.600	71308-4096		71308-4196		71308-4296		71308-5096	71308-5196	71308-5296			96																				
98	124.46	4.900	121.92	4.800	119.38	4.700	71308-4098		71308-4198		71308-4298		71308-5098	71308-5198	71308-5298			98																				
100	127.00	5.000	124.46	4.900	121.92	4.800	71308-4100		71308-4200		71308-4300		71308-5100	71308-5200	71308-5300			100																				

	13	12	11	10	9	8	7	6	5	4	3	2	1																				
J			PACKAGING SEE NOTE 4 SHT 1	4-8 CKT	BULK	TAPE-N-REEL W/ VAC CAPS	BULK	TAPE-N-REEL W/ VAC CAPS																									
				10-100 CKT	TUBES	TAPE-N-REEL W/ VAC CAPS	TUBES	TAPE-N-REEL W/ VAC CAPS																									
			DIM. M±0.25 MM	6.10 (.240)	6.10 (.240)																												
			PLATING	30 GOLD	150 TIN																												
			DIM. H	2.54 (.100)	2.54 (.100)																												
			DIM. J	5.08 (.200)	5.08 (.200)																												
I	CKTS	DIM. A	DIM. B	DIM. C	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	CKTS																			
		MM IN	MM IN	MM IN																													
	04	5.08 .200	2.54 .100	----	015-91-1048	015-91-6047								04																			
	06	7.62 .300	5.08 .200	2.54 .100	015-91-1068	015-91-6067	71308-6106	71308-6206						06																			
	08	10.16 .400	7.62 .300	5.08 .200	015-91-1088	015-91-6087	71308-6108	71308-6208						08																			
	10	12.70 .500	10.16 .400	7.62 .300	015-91-1108	015-91-6107	71308-6110	71308-6210						10																			
	12	15.24 .600	12.70 .500	10.16 .400	015-91-1128									12																			
	14	17.78 .700	15.24 .600	12.70 .500	015-91-1148	015-91-6147								14																			
H	16	20.32 .800	17.78 .700	15.24 .600	015-91-1168	015-91-6167								16																			
	18	22.86 .900	20.32 .800	17.78 .700	015-91-1188									18																			
	20	25.40 1.000	22.86 .900	20.32 .800	015-91-1208	015-91-6207								20																			
	22	27.94 1.100	25.40 1.000	22.86 .900	015-91-1228									22																			
	24	30.48 1.200	27.94 1.100	25.40 1.000	015-91-1248									24																			
	26	33.02 1.300	30.48 1.200	27.94 1.100	015-91-1268		71308-6126							26																			
	28	35.56 1.400	33.02 1.300	30.48 1.200	015-91-1288									28																			
G	30	38.10 1.500	35.56 1.400	33.02 1.300	015-91-1308									30																			
	32	40.64 1.600	38.10 1.500	35.56 1.400	015-91-1328									32																			
	34	43.18 1.700	40.64 1.600	38.10 1.500	015-91-1348									34																			
	36	45.72 1.800	43.18 1.700	40.64 1.600	015-91-1368									36																			
	38	48.26 1.900	45.72 1.800	43.18 1.700	015-91-1388									38																			
	40	50.80 2.000	48.26 1.900	45.72 1.800	015-91-1408	015-91-6407								40																			
	42	53.34 2.100	50.80 2.000	48.26 1.900	015-91-1428									42																			
F	44	55.88 2.200	53.34 2.100	50.80 2.000	015-91-1448									44																			
	46	58.42 2.300	55.88 2.200	53.34 2.100	015-91-1468									46																			
	48	60.96 2.400	58.42 2.300	55.88 2.200	015-91-1488									48																			
	50	63.50 2.500	60.96 2.400	58.42 2.300	015-91-1508	015-91-6507								50																			
	52	66.04 2.600	63.50 2.500	60.96 2.400	015-91-1528									52																			
	54	68.58 2.700	66.04 2.600	63.50 2.500	015-91-1548									54																			
E	56	71.12 2.800	68.58 2.700	66.04 2.600	015-91-1568									56																			
	58	73.66 2.900	71.12 2.800	68.58 2.700	015-91-1588									58																			
	60	76.20 3.000	73.66 2.900	71.12 2.800	015-91-1608									60																			
	62	78.74 3.100	76.20 3.000	73.66 2.900	015-91-1628									62																			
	64	81.28 3.200	78.74 3.100	76.20 3.000	015-91-1648									64																			
	66	83.82 3.300	81.28 3.200	78.74 3.100	015-91-1668									66																			
	68	86.36 3.400	83.82 3.300	81.28 3.200	015-91-1688									68																			
	70	88.90 3.500	86.36 3.400	83.82 3.300	015-91-1708									70																			
	72	91.44 3.600	88.90 3.500	86.36 3.400	015-91-1728									72																			
D	74	93.98 3.700	91.44 3.600	88.90 3.500	015-91-1748									74																			
	76	96.52 3.800	93.98 3.700	91.44 3.600	015-91-1768									76																			
	78	99.06 3.900	96.52 3.800	93.98 3.700	015-91-1788									78																			
	80	101.60 4.000	99.06 3.900	96.52 3.800	015-91-1808									80																			
	82	104.14 4.100	101.60 4.000	99.06 3.900	71308-6082									82																			
	84	106.68 4.200	104.14 4.100	101.60 4.000	71308-6084									84																			
	86	109.22 4.300	106.68 4.200	104.14 4.100	71308-6086									86																			
	88	111.76 4.400	109.22 4.300	106.68 4.200	71308-6088									88																			
C	90	114.30 4.500	111.76 4.400	109.22 4.300	71308-6090									90																			
	92	116.84 4.600	114.30 4.500	111.76 4.400	71308-6092									92																			
	94	119.38 4.700	116.84 4.600	114.30 4.500	71308-6094									94																			
	96	121.92 4.800	119.38 4.700	116.84 4.600	71308-6096									96																			
	98	124.46 4.900	121.92 4.800	119.38 4.700	71308-6098									98																			
	100	127.00 5.000	124.46 4.900	121.92 4.800	71308-6100									100																			
B	SHORT PEG VERSION (.055")														B																		
A	SEE SHEET 1 EC NO: UCP2009-2465 DRWN:MKIPPER CHKD:SSOUSEK APPR:FSMITH 2009/08/04 2009/08/07 2009/08/10 QUALITY SYMBOLS ▽=0 ▽=0 GENERAL TOLERANCES (UNLESS SPECIFIED)<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .005</td></tr><tr><td>2 PLACES</td><td>± 0.13</td><td>± .010</td></tr><tr><td>1 PLACE</td><td>± 0.25</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ±1/2°</td></tr></table> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION STYLE MM/IN DRAWN BY DATE KMS 1999/10/15 CHECKED BY DATE KMS 1999/10/15 APPROVED BY DATE KMS 1999/10/15 MATERIAL NO. SEE TABLE DOCUMENT NO. SD-71308-001 SHEET NO. 5 OF 6 SCALE INCH DESIGN UNITS INCH THIRD ANGLE PROJECTION SALES ASSY INSULATOR DUAL ROW SMT W/BREAK-OFF .025SQ PIN GULLWING .100 MOLEX MOLEX INCORPORATED															mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .005	2 PLACES	± 0.13	± .010	1 PLACE	± 0.25	± ---	ANGULAR ±1/2°			A
	mm	INCH																															
4 PLACES	± ---	± ---																															
3 PLACES	± ---	± .005																															
2 PLACES	± 0.13	± .010																															
1 PLACE	± 0.25	± ---																															
ANGULAR ±1/2°																																	
	12	11	10	9	8	7	6	5	4	3	2	1																					

