
This document was generated on 03/01/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0766805006
Status: Active
Overview: GbX I-Trac™ Backplane Connector System
Description: GbX I-Trac™ NXT Right-Angle Daughtercard Module, 1.85mm by 3.70mm Pitch, Right Guide, 11 Rows, 6 Columns, 132 Circuits

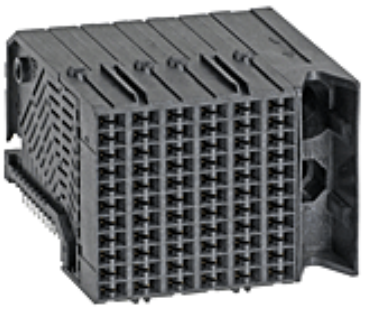

Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-75710-999-001 (PDF)
Packaging Specification PK-70873-609 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

UL	E29179

General

Product Family	Backplane Connectors
Series	76680
Application	Coplanar, Daughtercard
Component Type	PCB Receptacle
Overview	GbX I-Trac™ Backplane Connector System
Product Name	GbX I-Trac™
UPC	883906577476

Physical

Circuits (Loaded)	132
Circuits (maximum)	132
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	22.846/g
Number of Columns	6
Number of Pairs	Open Pin Field
Number of Rows	11
Orientation	Right Angle
PC Tail Length	1.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.85mm, 3.70mm
Pitch - Termination Interface	1.00mm, 2.70mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to PCB	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +80°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

EU ELV
Not Relevant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per -ED/01/2017 (12 January 2017)

Halogen-Free Status
Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the Contact Us section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
76680 Series

Mates With
75705-5603 GbX I-Trac™ Vertical Header

Current - Maximum per Contact	1.0A
Data Rate	12.0 Gbps
Shield Type	N/A
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-70873-609
Product Specification	PS-75710-999-001
Sales Drawing	SD-76680-004

This document was generated on 03/01/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION