

2.0mm DUAL ROW TRANSITION PLUG I.D.C. TYPE




200175MI Serie

Mates With SUYIN 1.0mm Pitch Flat Cable

Specifications:

- 8-60Circuits
- Insulator material : Black High Temp . Plastic
- Temp. Range : -40°C to +105°C
- Terminal Material : Pho. bronze
- Plating : Contact-Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 seconds)

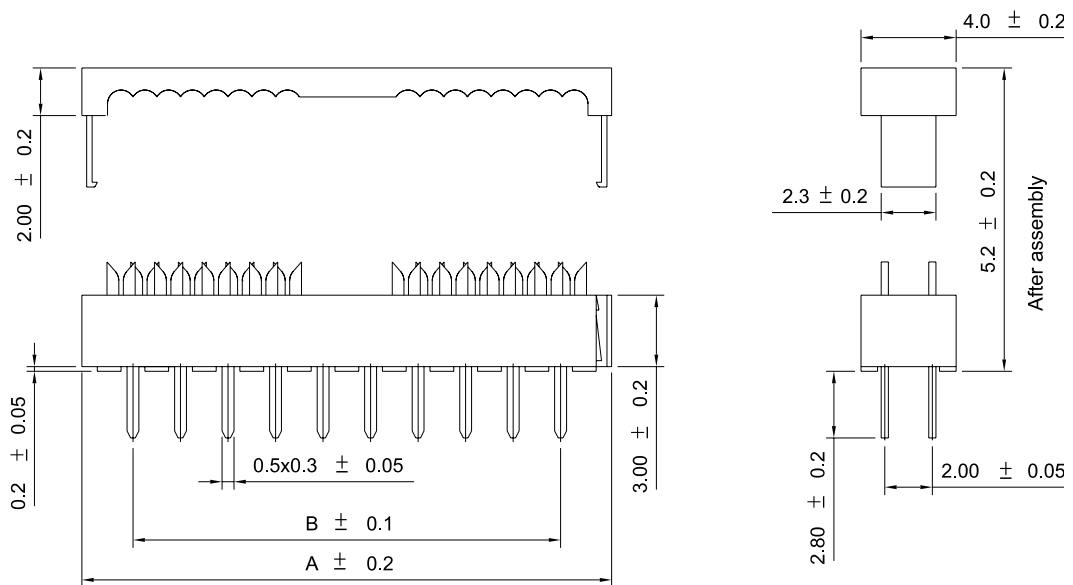


Order Information

200175MI□□□□00ZO
1 2 3 4 5

1. 'I' : IDC Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
'O' : Slim Box Package Without CAP

Reference Page 11

Recommended P.C.B Layout

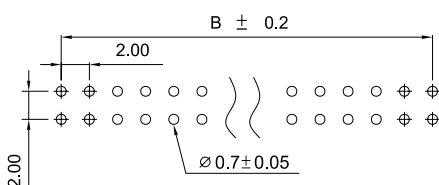

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200175MI008□□00ZO	12.3	6.0	200175MI036□□00ZO	40.3	34.0
200175MI010□□00ZO	14.3	8.0	200175MI038□□00ZO	42.3	36.0
200175MI012□□00ZO	16.3	10.0	200175MI040□□00ZO	44.3	38.0
200175MI014□□00ZO	18.3	12.0	200175MI042□□00ZO	46.3	40.0
200175MI016□□00ZO	20.3	14.0	200175MI044□□00ZO	48.3	42.0
200175MI018□□00ZO	22.3	16.0	200175MI046□□00ZO	50.3	44.0
200175MI020□□00ZO	24.3	18.0	200175MI048□□00ZO	52.3	46.0
200175MI022□□00ZO	26.3	20.0	200175MI050□□00ZO	54.3	48.0
200175MI024□□00ZO	28.3	12.0	200175MI052□□00ZO	56.3	50.0
200175MI026□□00ZO	30.3	24.0	200175MI054□□00ZO	58.3	52.0
200175MI028□□00ZO	32.3	26.0	200175MI056□□00ZO	60.3	54.0
200175MI030□□00ZO	34.3	28.0	200175MI058□□00ZO	62.3	56.0
200175MI032□□00ZO	36.3	30.0	200175MI060□□00ZO	64.3	58.0
200175MI034□□00ZO	38.3	32.0			