

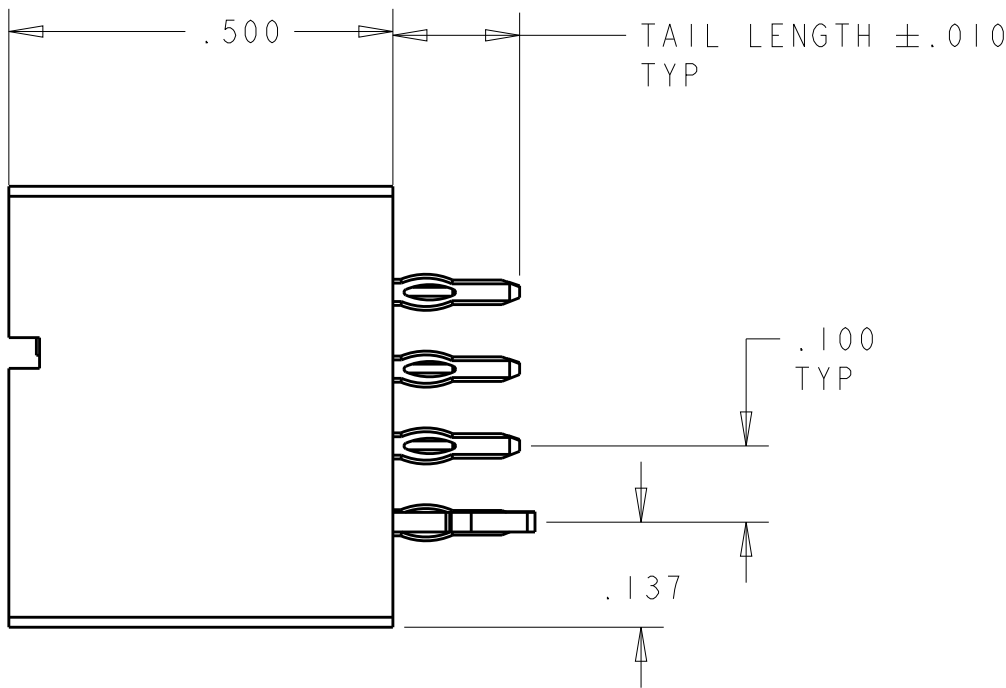
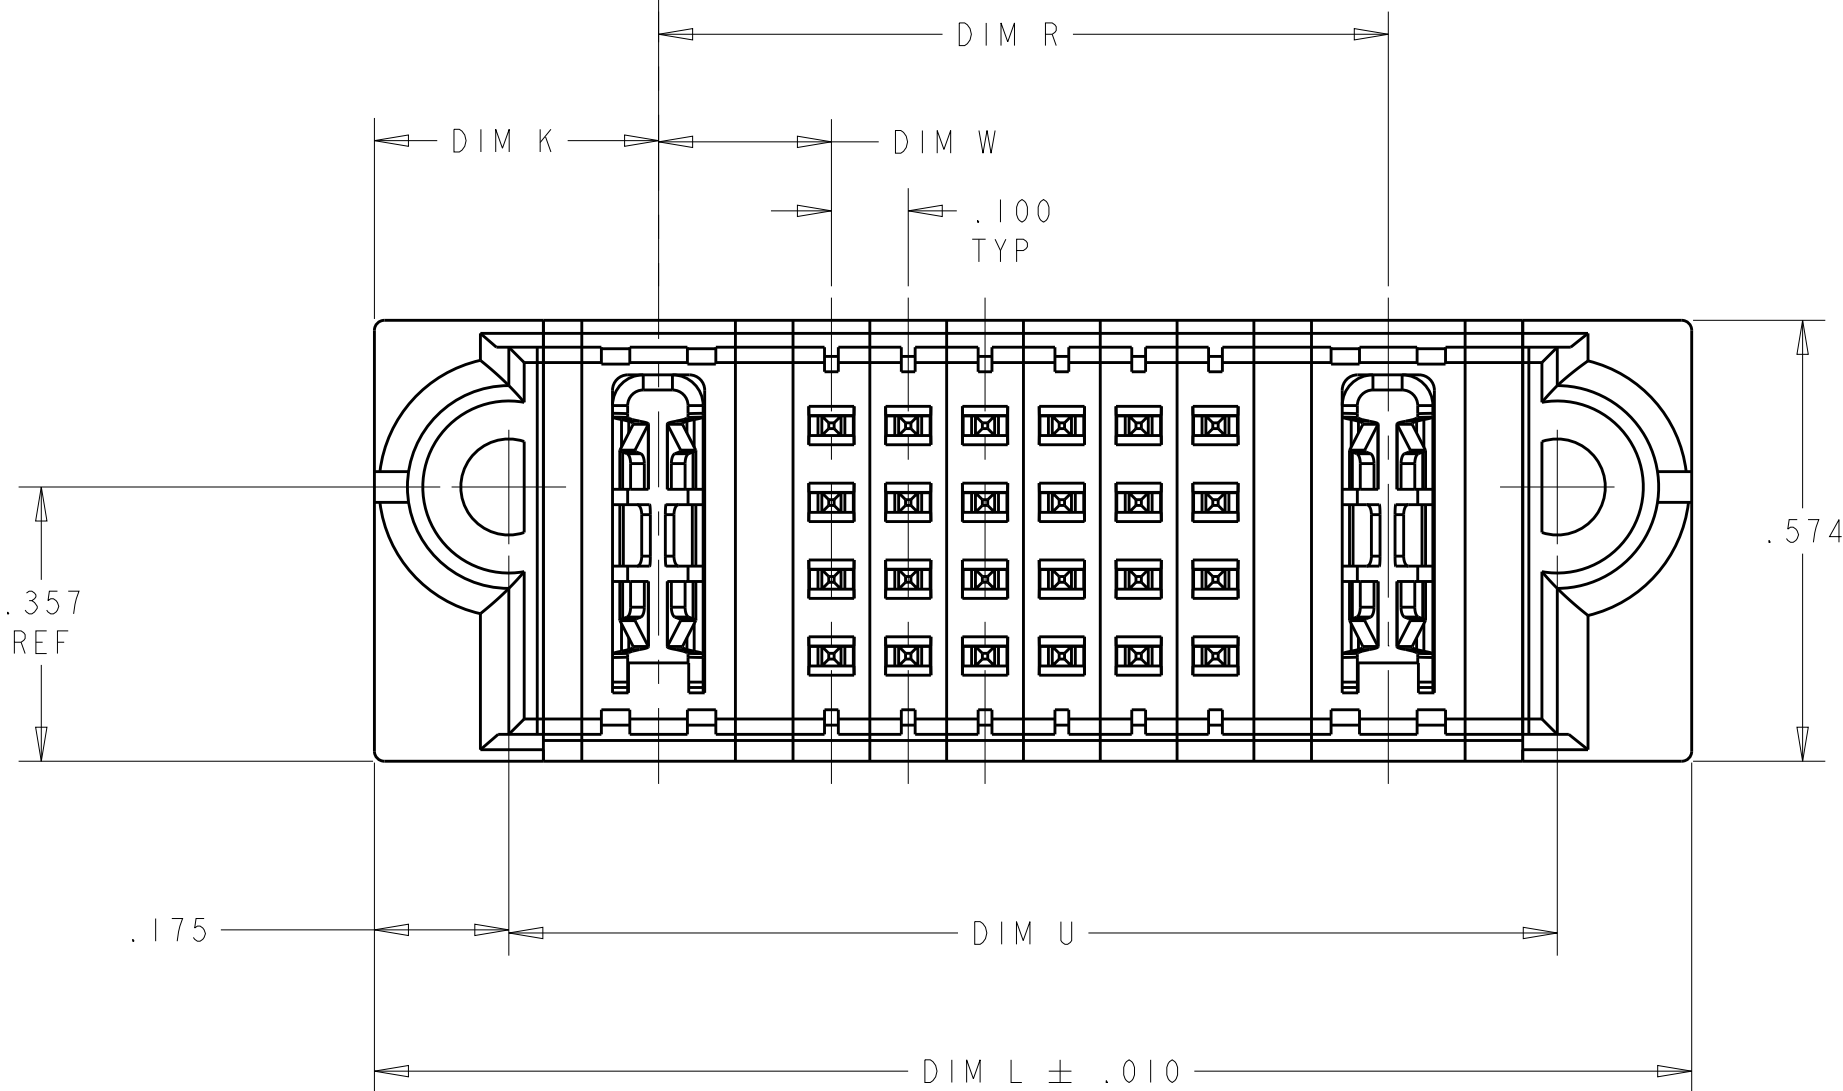
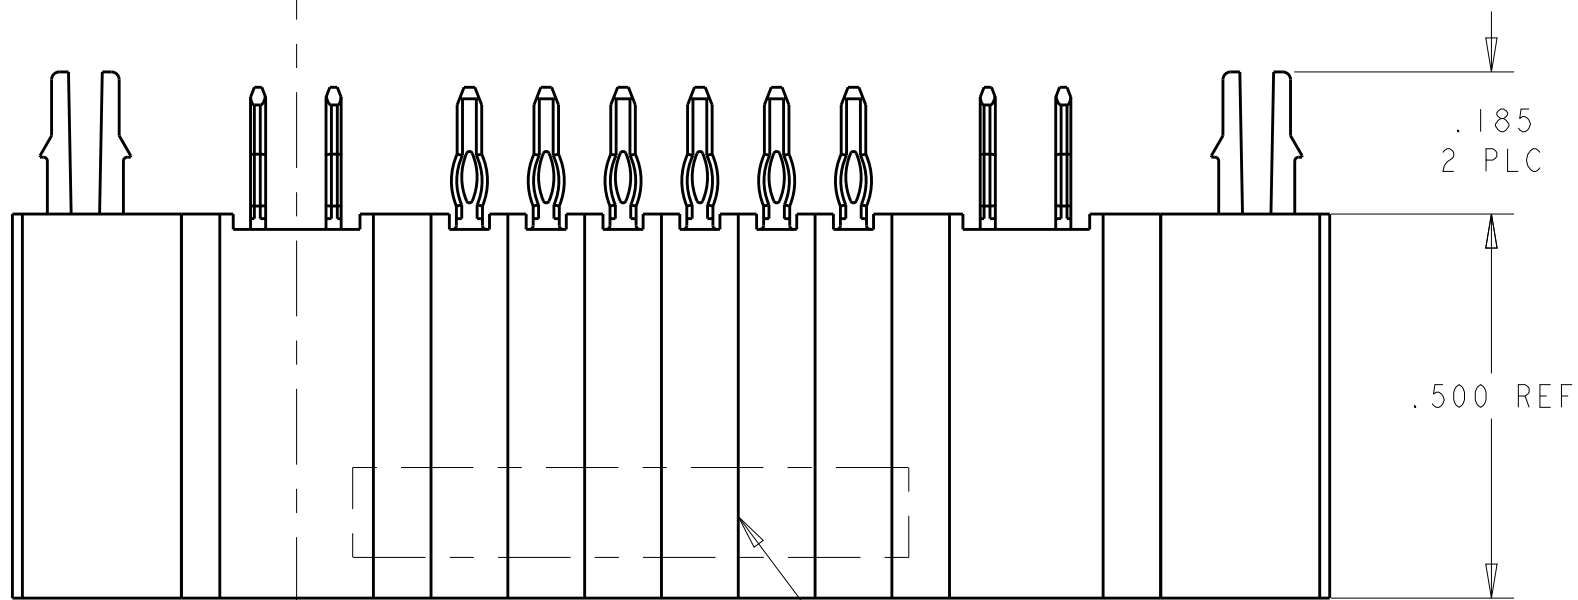


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			G6	ADD NEW PART -25	19AUG2013	AY	SZ	
			G7	UPDATE -25 MATING SEQUENCE	29AUG2013	AY	SZ	
			G8	UPDATE -25 MATING SEQUENCE	30AUG2013	AY	SZ	

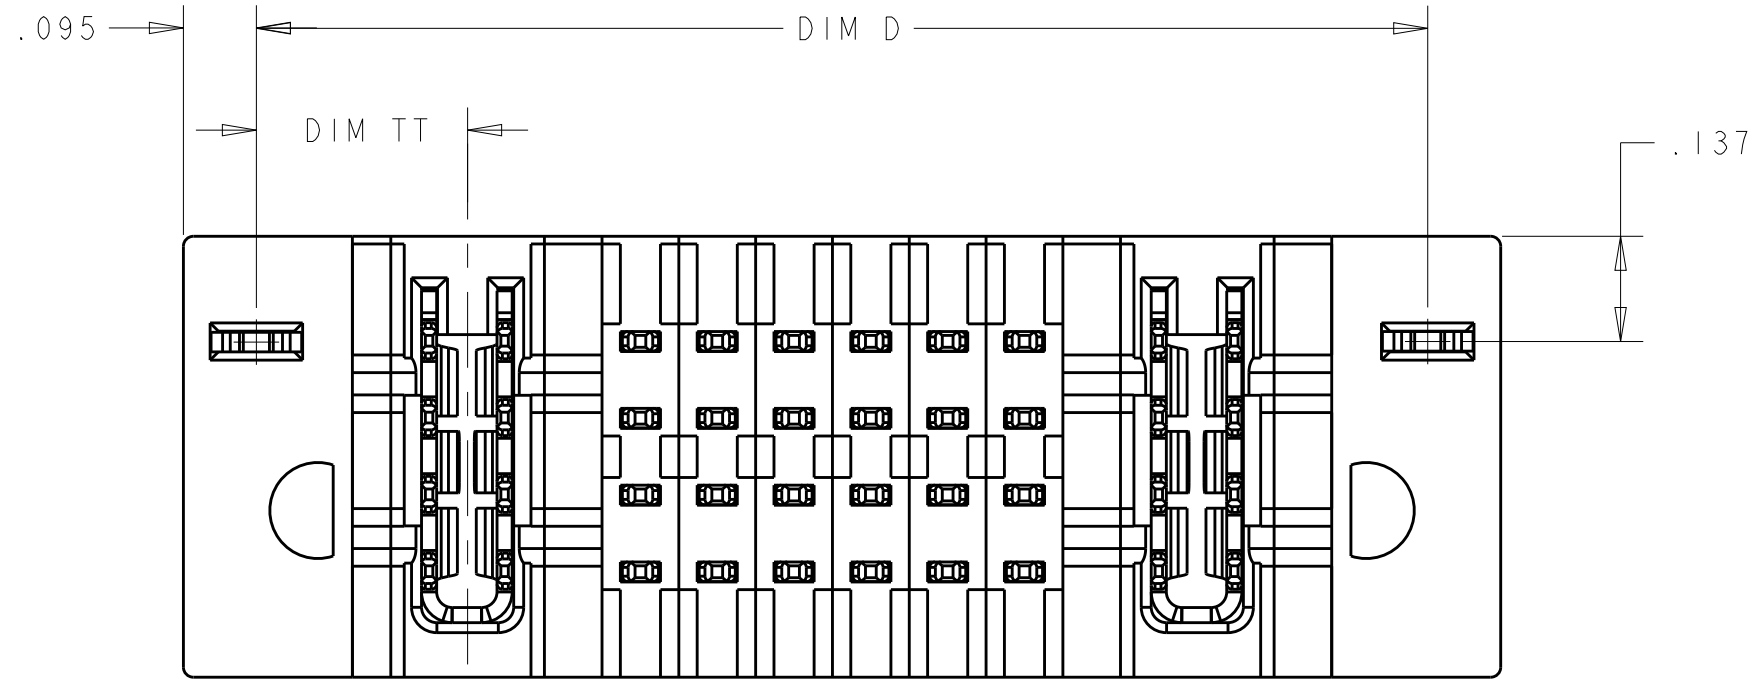

- 1
- HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
- 2
- CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 3
- "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
- 4
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 6
- A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13251 APPLICATION SPEC.
- 7
- MECHANICAL CONNECTOR KEEP OUT ZONE.
- 8
- DETAIL DIM SEE PART VIEW
- 9
- FOR THE CONFIGURATION WITH VENT, PLEASE REFER TO SHEET 2.
- 10
- FOR THE CONFIGURATION LP/S/LP WITH VENT, PLEASE REFER TO SHEET 3.
- 11
- FOR THE CONFIGURATION LP/S/P, WITH VENT, PLEASE REFER TO SHEET 4.

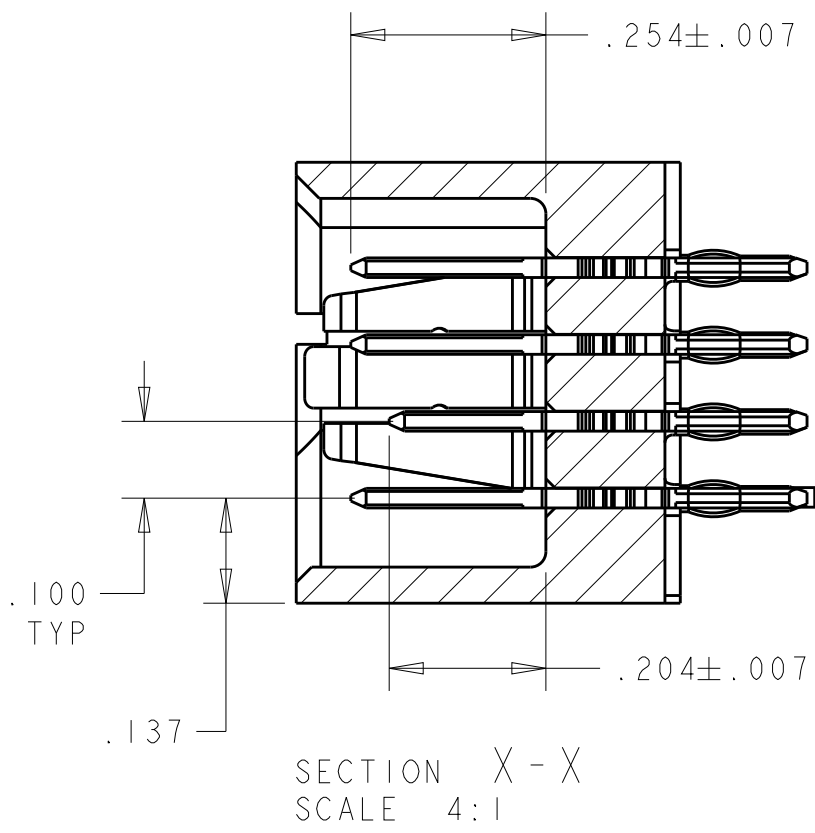

66	.240	.165	.1825	2.220	1.870	2.030	1.145	.7125	.2775	3LP + 16S + 4LP	2-6450820-5
	.200	-	.225	3.065	2.715	2.875	-	1.975	.320	10HDP + 24S	2-6450820-3
	.300	-	.275	1.790	1.440	1.600	-	1.150	.370	4ACP + 4S	2-6450820-2
	.115	.250	.2075	2.555	2.205	2.365	1.4075	.7325	.3025	6LP + 24S + 3P	2-6450820-1
	-	-	.1825	1.120	.770	.930	.565	.1575	.2775	1LP + 16S + 1LP	2-6450820-0
	.250	.250	.250	3.540	3.190	3.350	1.850	1.175	.345	5P + 24S + 5P	1-6450820-9
	.250	.250	.225	4.140	3.790	3.950	2.500	1.200	.320	5P + 48S + 5P	1-6450820-8
	.250	-	.225	4.640	4.290	4.450	-	2.950	.320	12P + 48S	1-6450820-7
	.250	-	.225	2.415	2.065	2.225	-	1.425	.320	6P + 20S	1-6450820-5
	-	.300	.175	2.665	2.315	2.475	.575	-	.270	20S + 6ACP	1-6450820-4
	.300	.300	.225	2.840	2.490	2.650	1.600	.850	.320	3ACP + 24S + 3ACP	1-6450820-3
	.250	.250	.250	4.040	3.690	3.850	2.100	1.425	.345	6P + 24S + 6P	1-6450820-1
63	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-9
	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-8
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-7
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-6
	.250	.250	.250	2.640	2.290	2.450	1.200	.925	.345	4P + 8S + 4P	6450820-5
	.250	.250	.250	3.640	3.290	3.450	1.700	1.425	.345	6P + 8S + 6P	6450820-4
	.250	.250	.275	2.790	2.440	2.600	1.550	.675	.370	3P + 32S + 3P	6450820-3
	-	-	.250	1.540	1.190	1.350	.850	.175	.345	1P + 24S + 1P	6450820-2
	-	-	.275	1.715	1.365	1.525	.950	.225	.370	1P + 24S + 1P	6450820-1
	DIM S	DIM T	DIM TT	DIM L	DIM U	DIM D	DIM R	DIM W	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.0020
FINISH

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
6450820

DRAWING NO
-

RESTRICTED TO
-

SCALE
-

SHEET
1




OF
20

REV
G8


TE Connectivity

TE

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


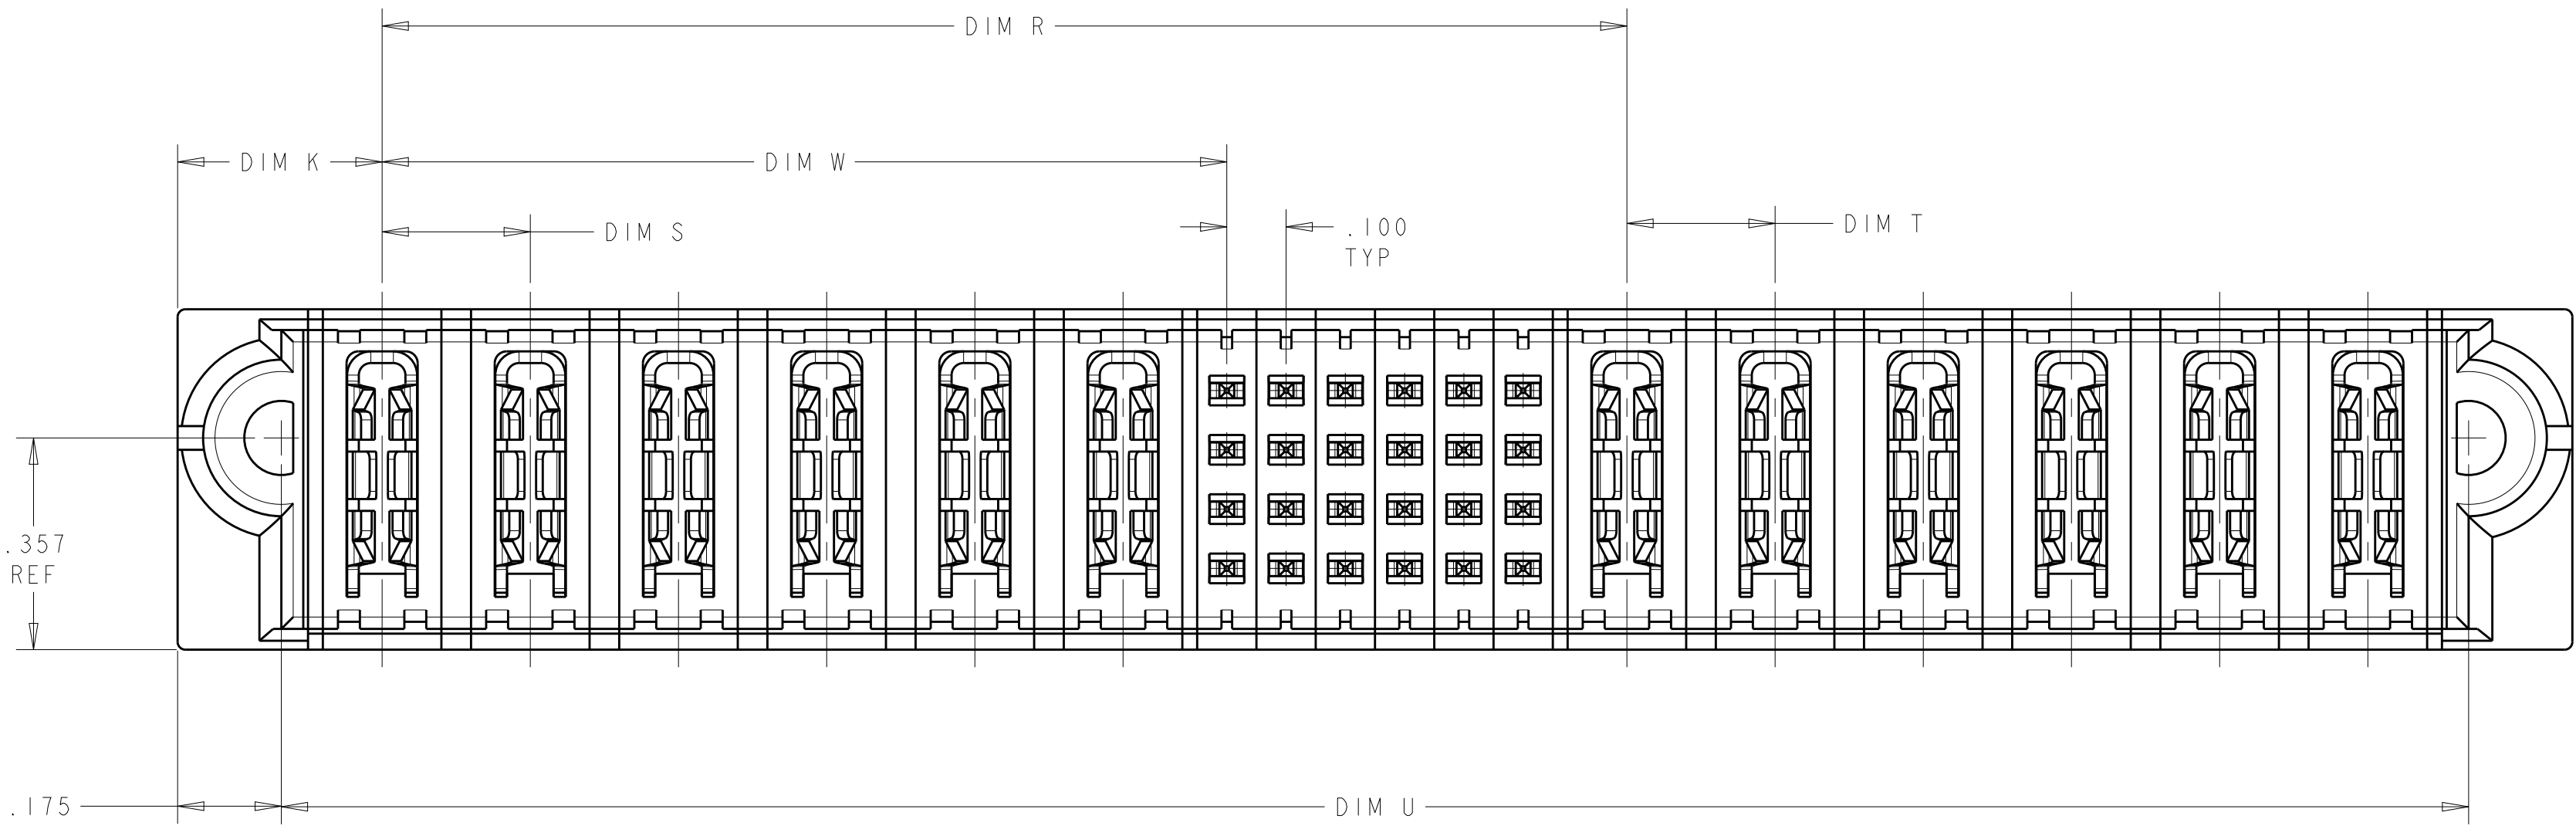
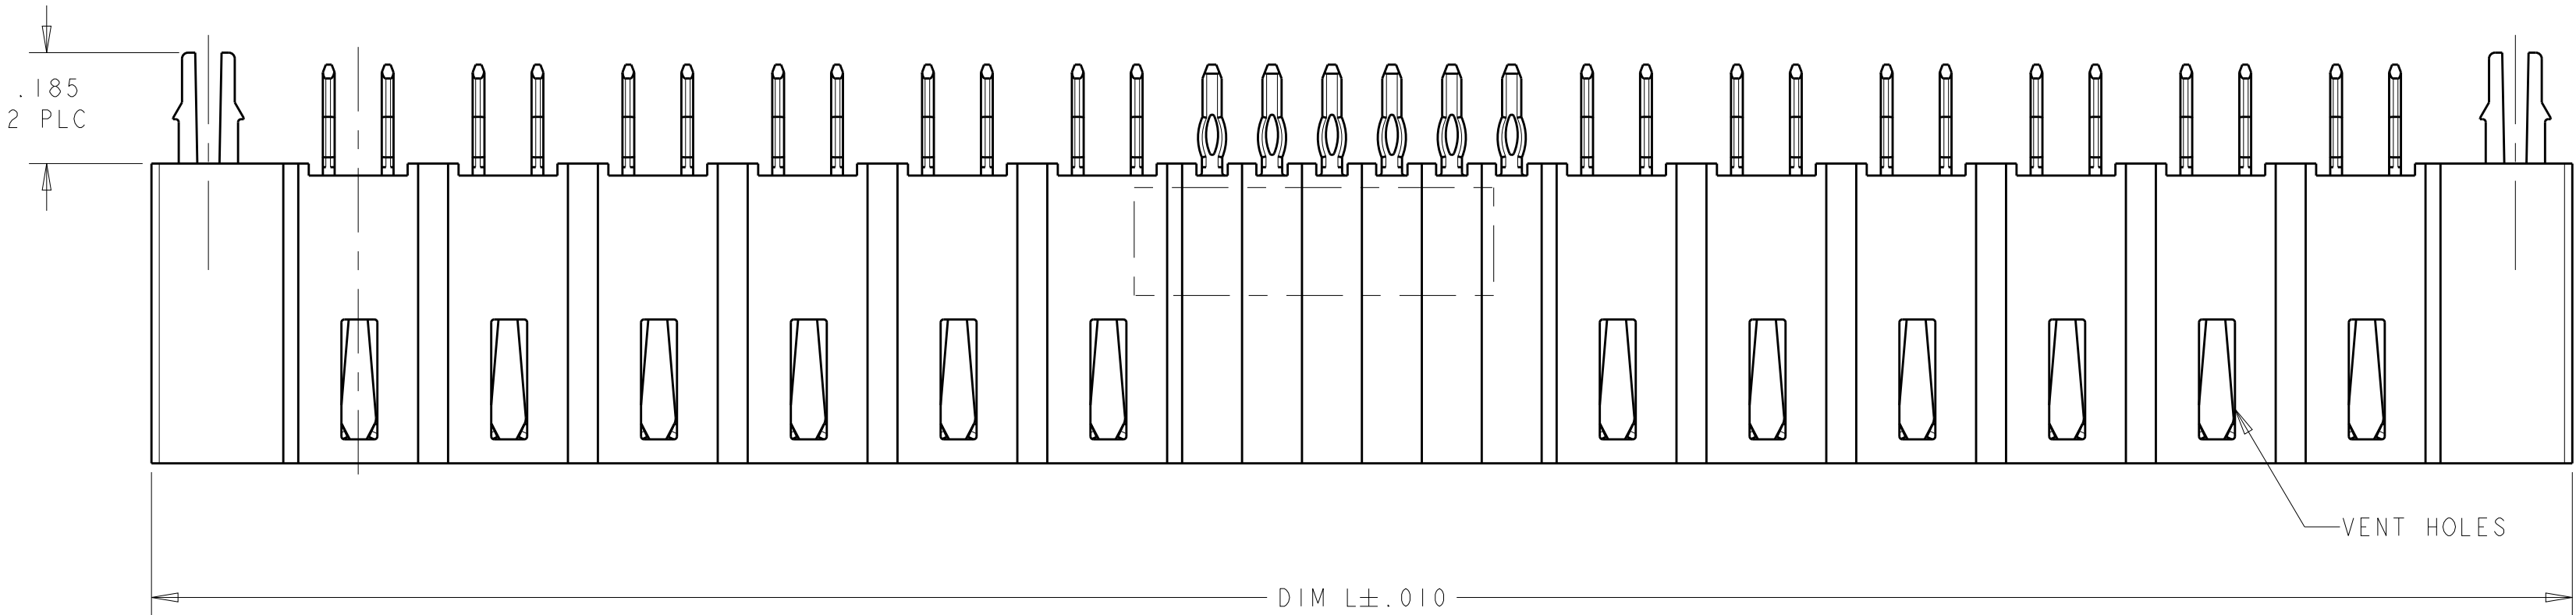
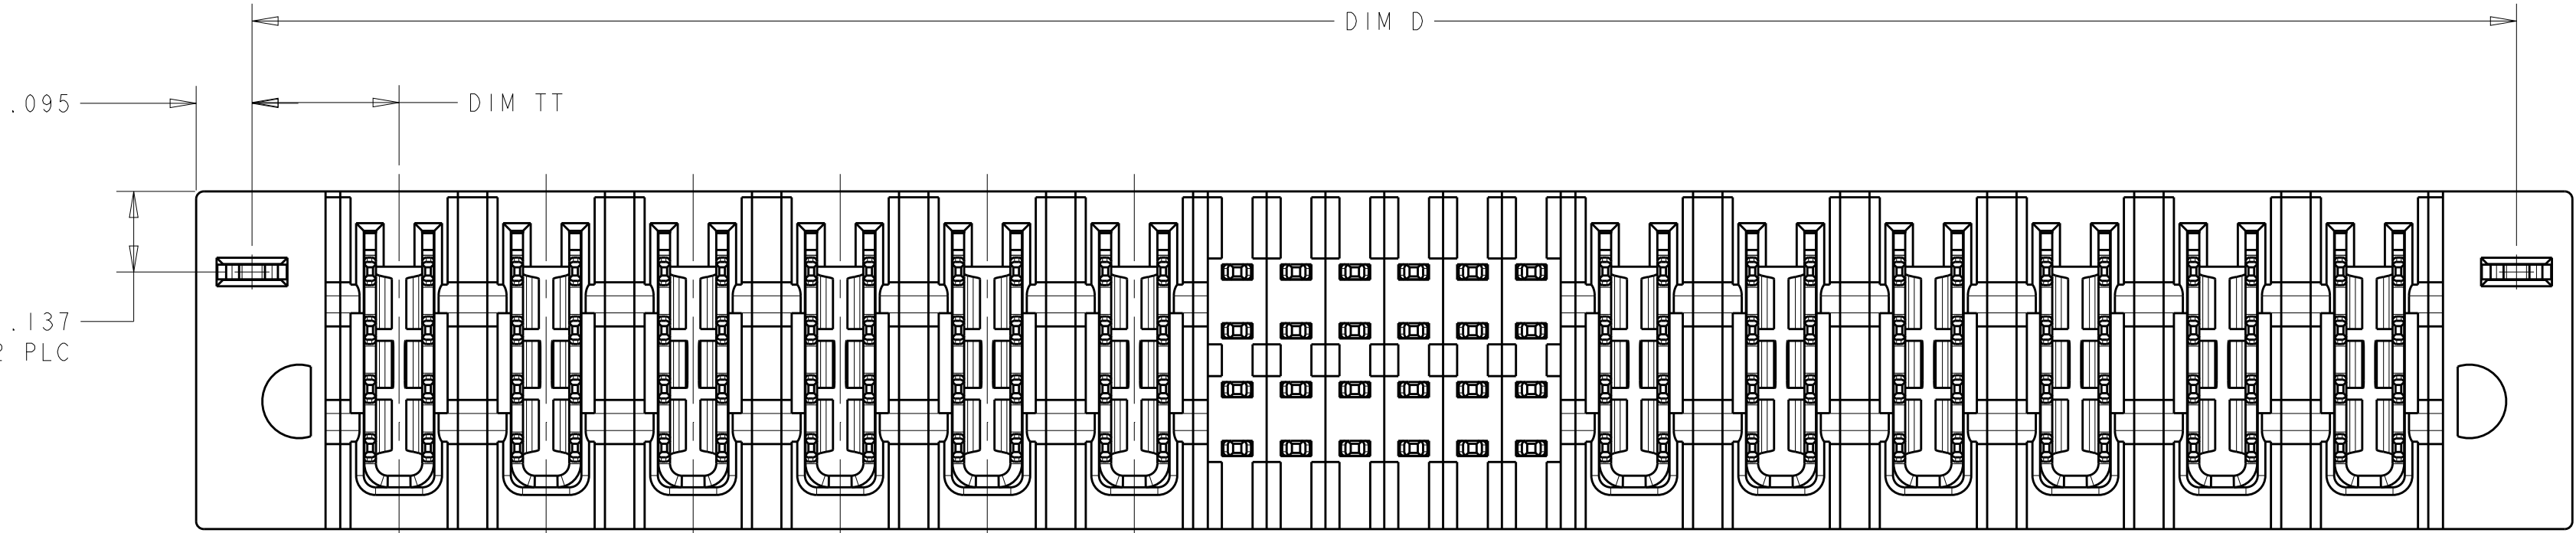


⑨ FOR THE CONFIGURATION WITH VENT
PART NO. 1-6450820-1

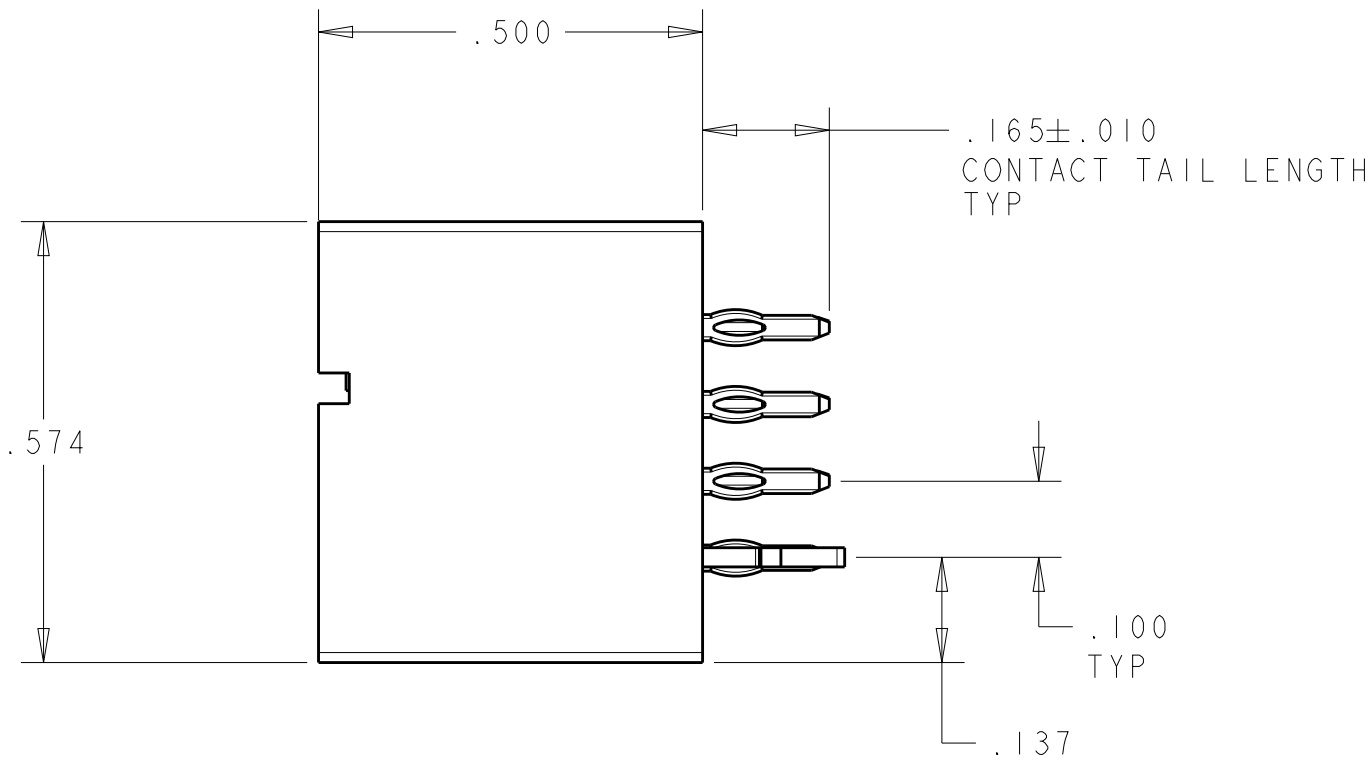

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		Customer Drawing	
MATERIAL		FINISH		SCALE	
-		-		SHEET 2 OF 20	
				REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

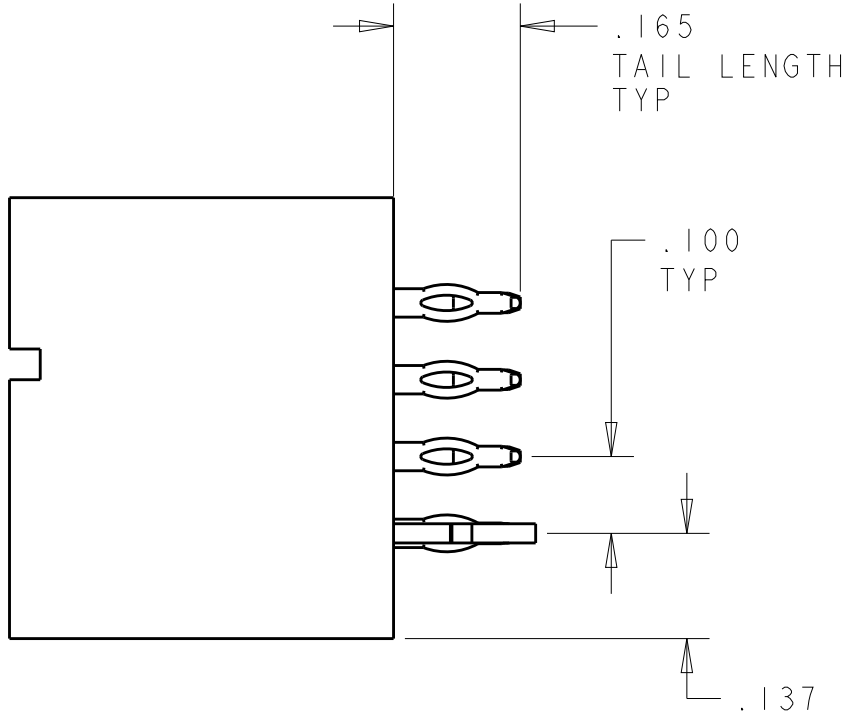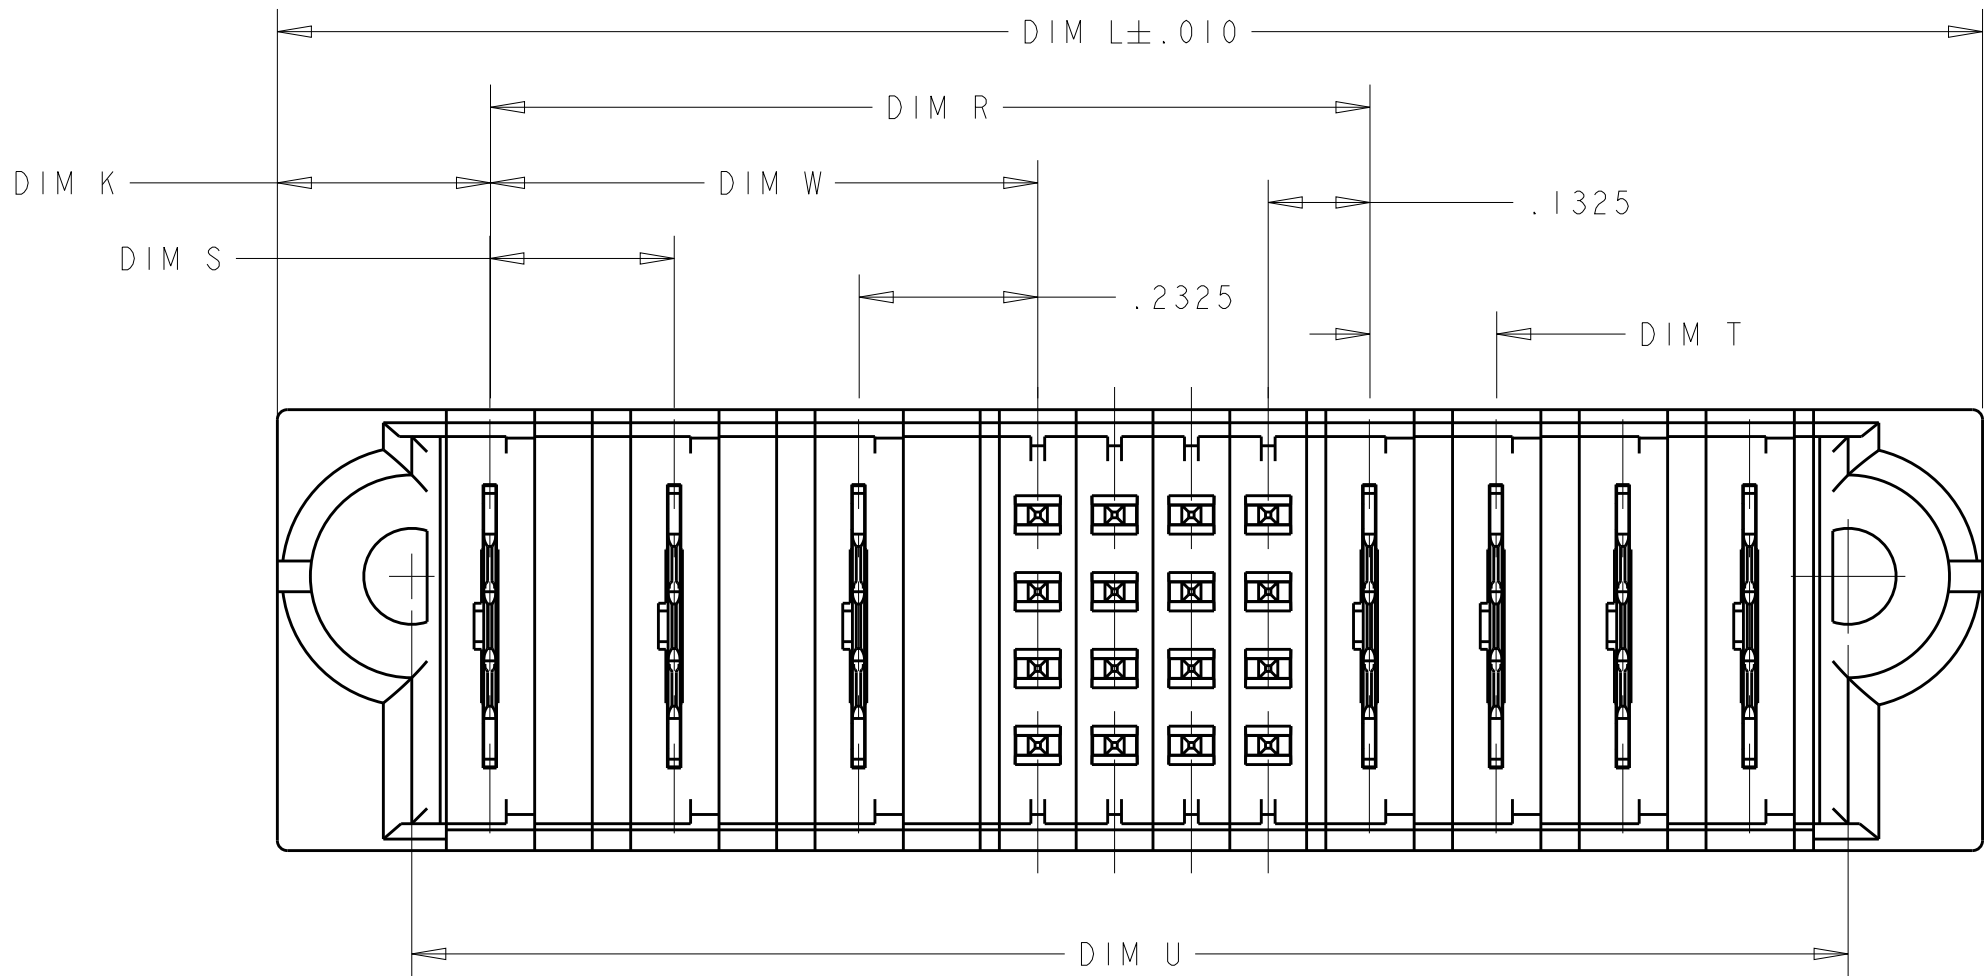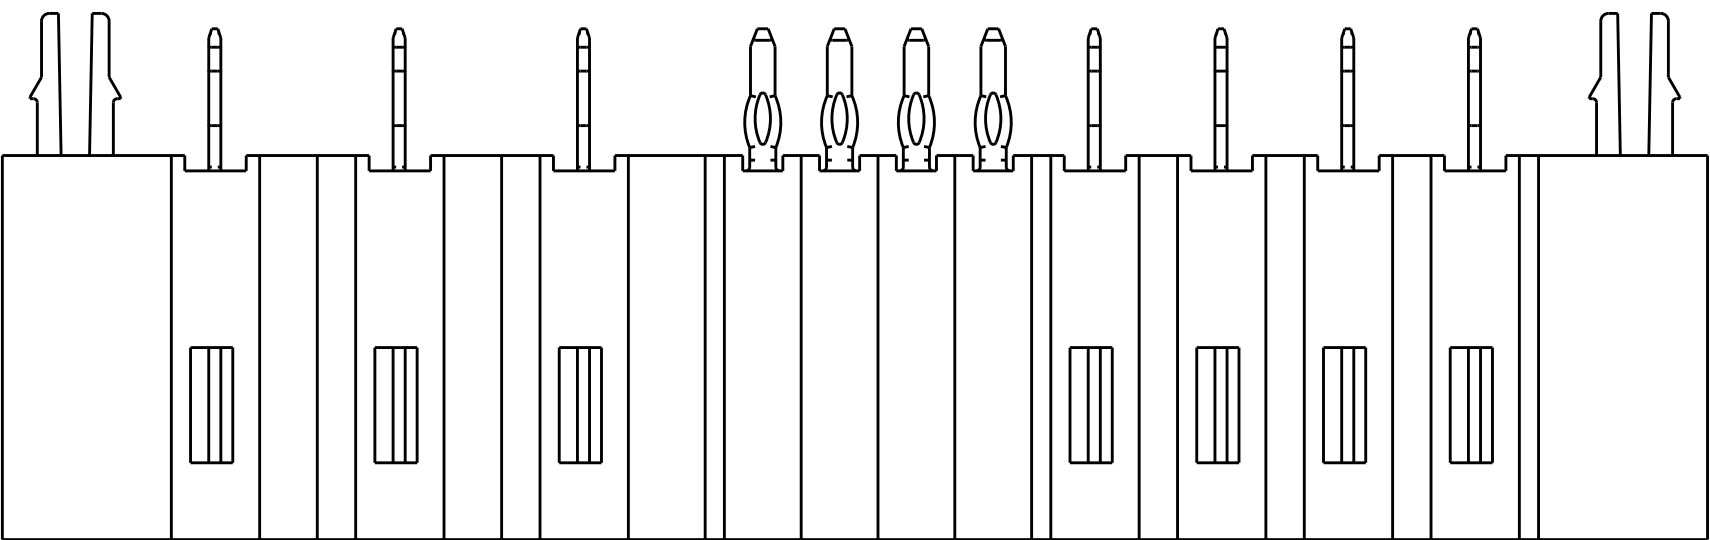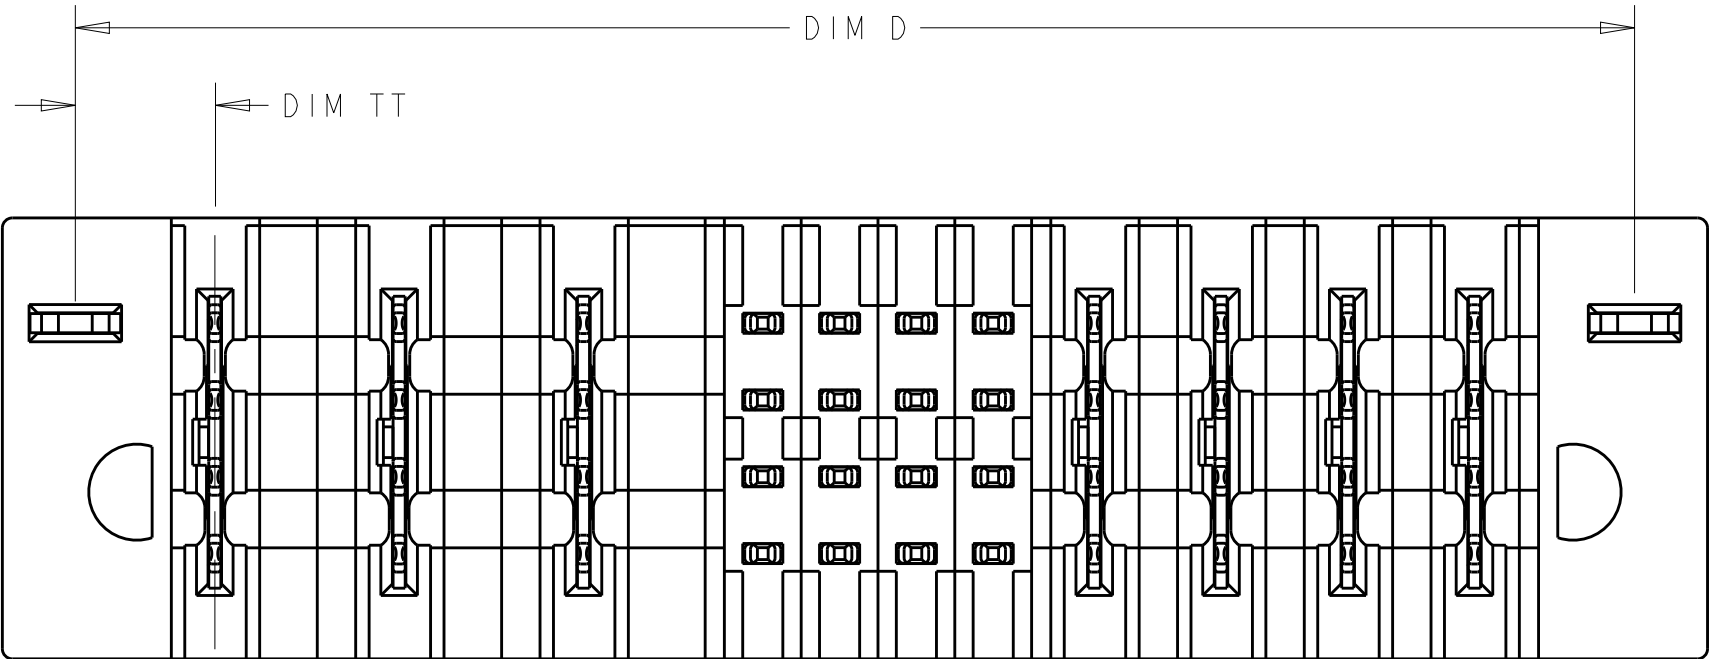

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

NAME
D. ZHU

PRODUCT SPEC
108-2292

APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

TE Connectivity

VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-


SCALE
-

SHEET
3


OF
20


REV
G8


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

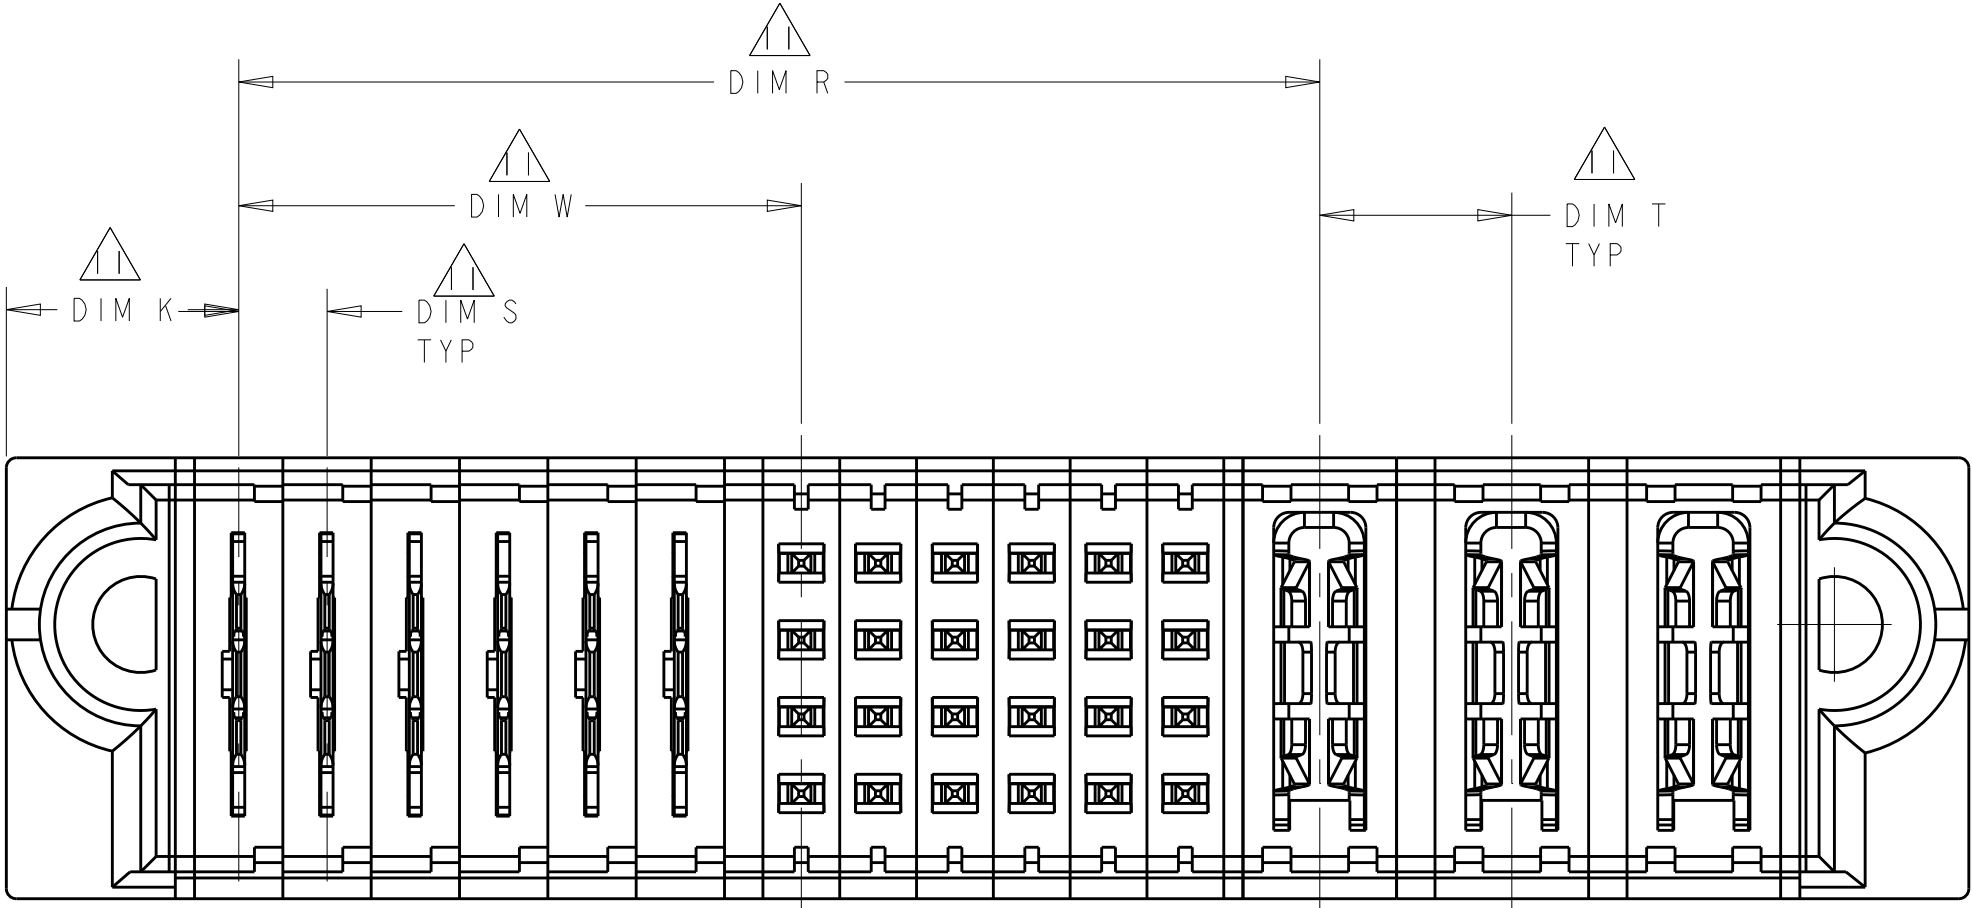

FOR THE CONFIGURATION LP/S/P WITH VENT
OTHER DIMSENSIONS PLEASE REFER TO SHEET 2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	 TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	15NOV2007		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH		VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
MATERIAL -		WEIGHT -		SIZE A1	
		Customer Drawing		CAGE CODE 100779	
				DRAWING NO 6450820	
				RESTRICTED TO -	
				SCALE -	
				SHEET 4	
				OF 20	
				REV G8	


PART NUMBER	ROWS		SIGNAL					POWER							
			1	2	3	4	5	P1	P2	P3	P4	P5	P6		
1-6450820-4	D		EV	EV	EV	EV	EV		VM		VM		VM		
	EV		EV	EV	EV	EV	EV								
	EV		EV	EV	EV	EV	EV								
	EV		EV	EV	EV	EV	EV								
20S + 6ACP															

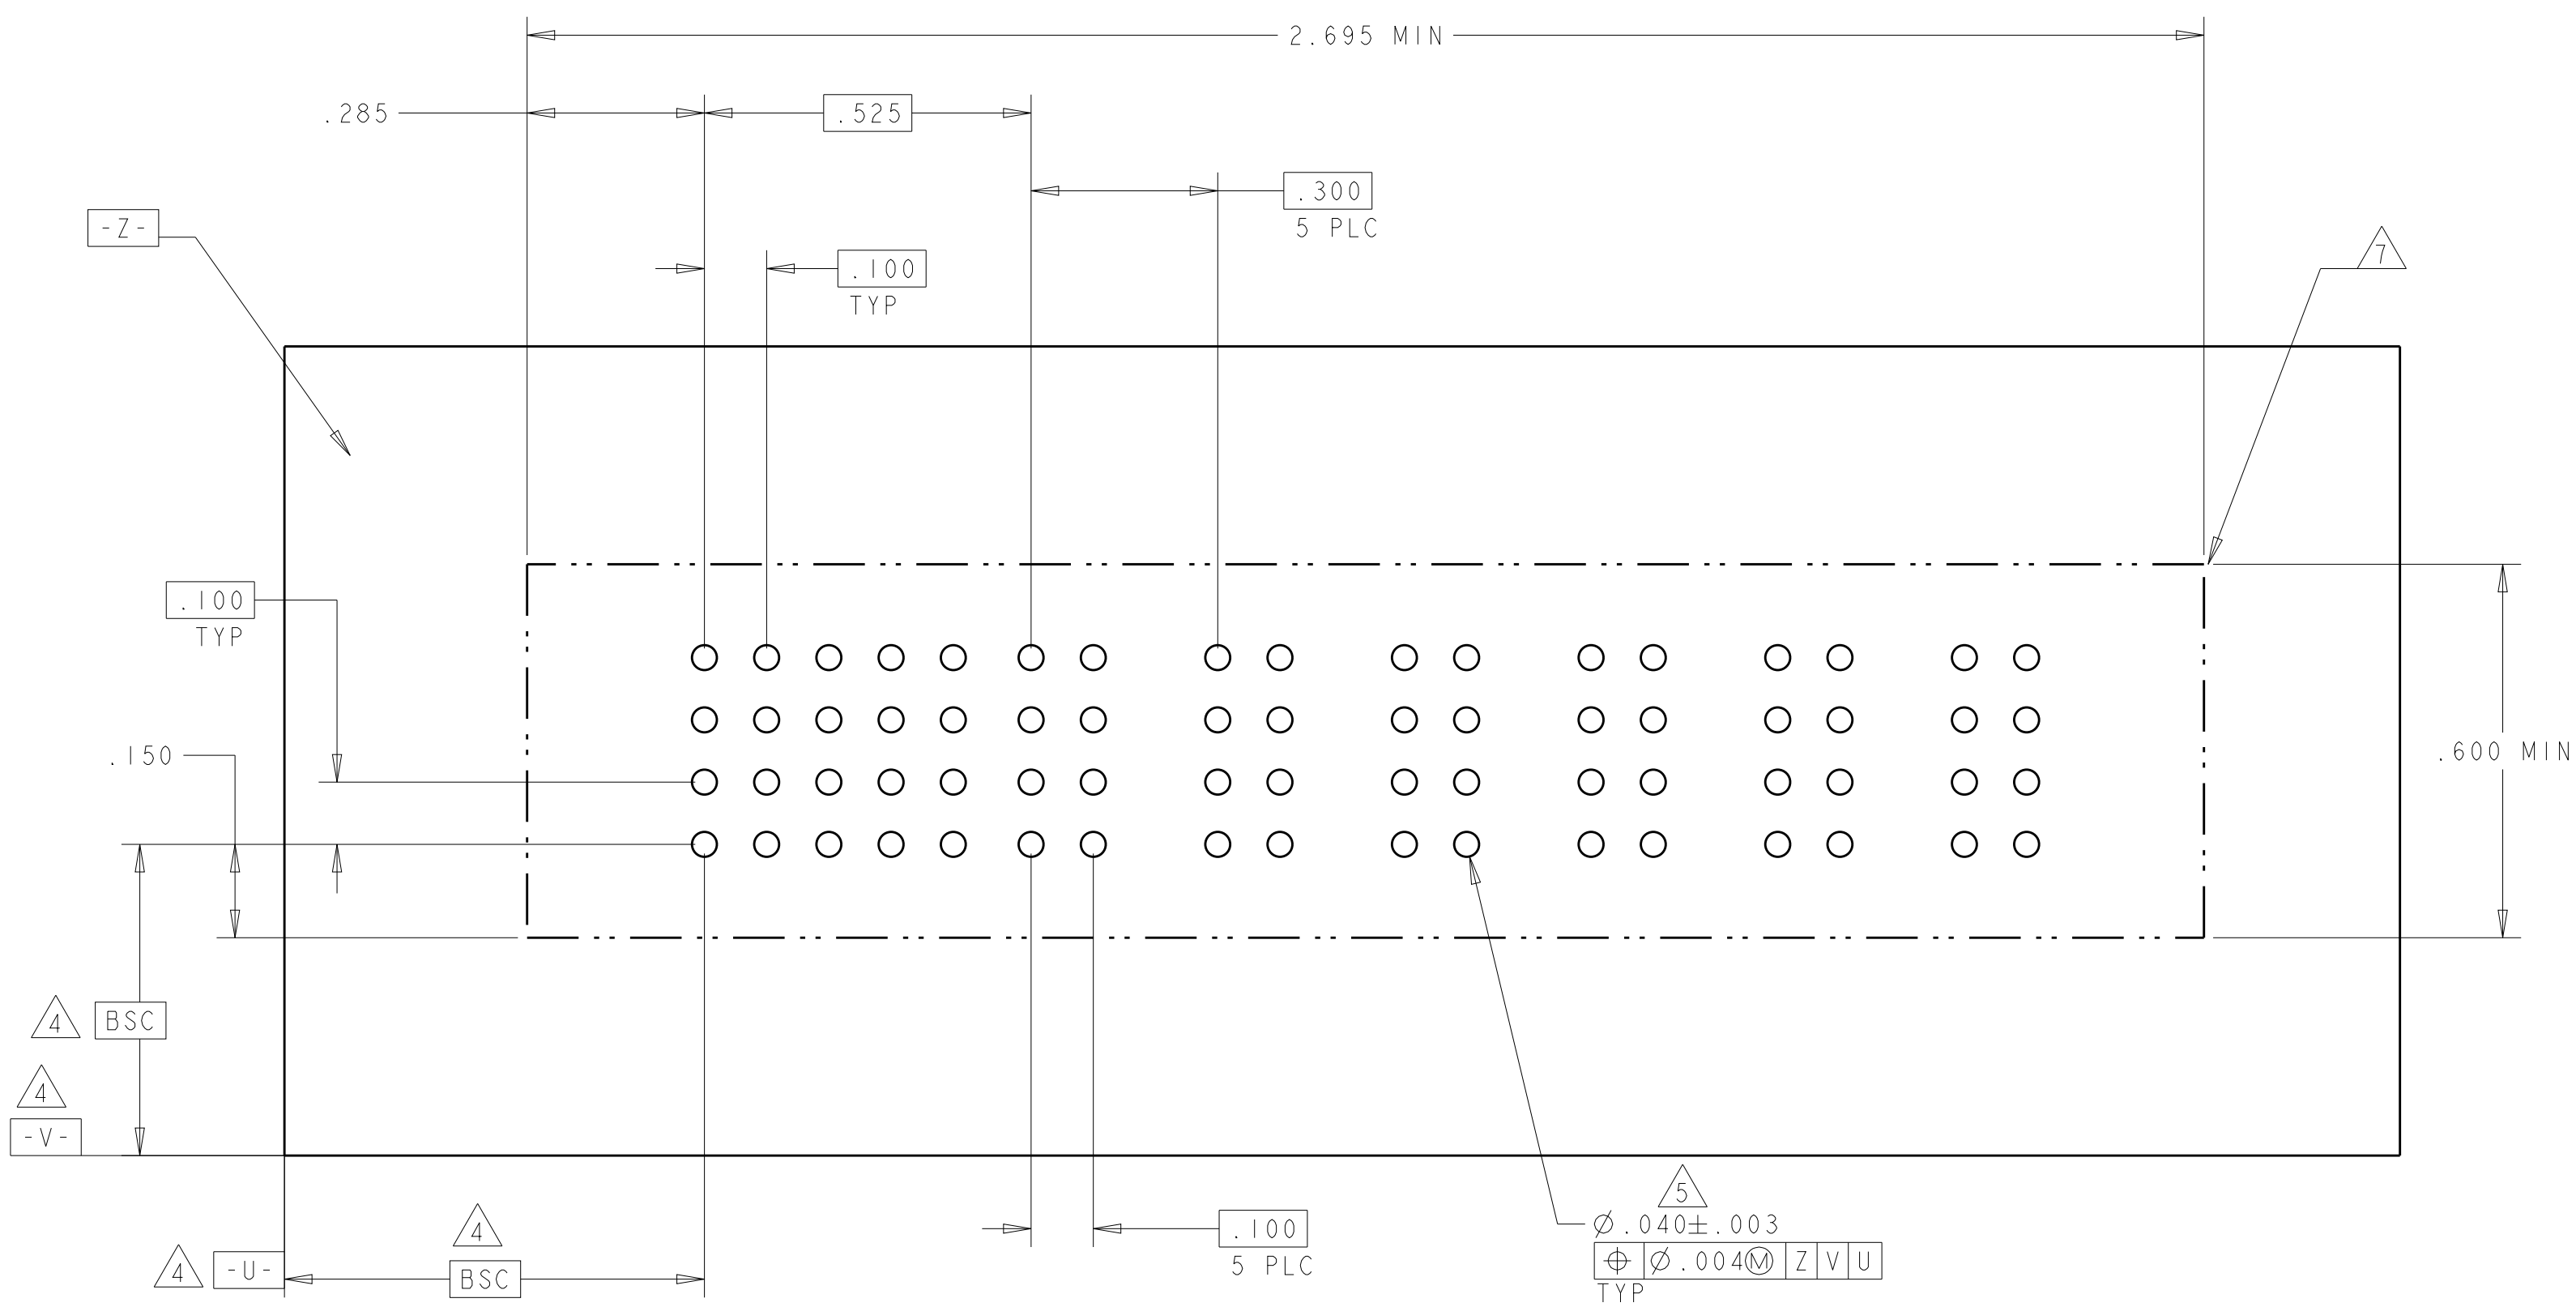

.165"	LOW POWER CONTACT	MFBLL	LZF
.165"	LOW POWER CONTACT		LZ
.165"	SIGNAL CONTACT	MFBLL	EF
-	HOLD DOWN		HD
.165"	SIGNAL CONTACT	MLBF	ES
.165"	SIGNAL CONTACT	STD	EV
.165"	POWER CONTACT		VM
TAIL LENGTH	DESCRIPTION		CODE

4805 (3/11)



PART NUMBER	ROWS		POWER						SIGNAL					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	
1-6450820-5	D C B A													
6P + 20S														

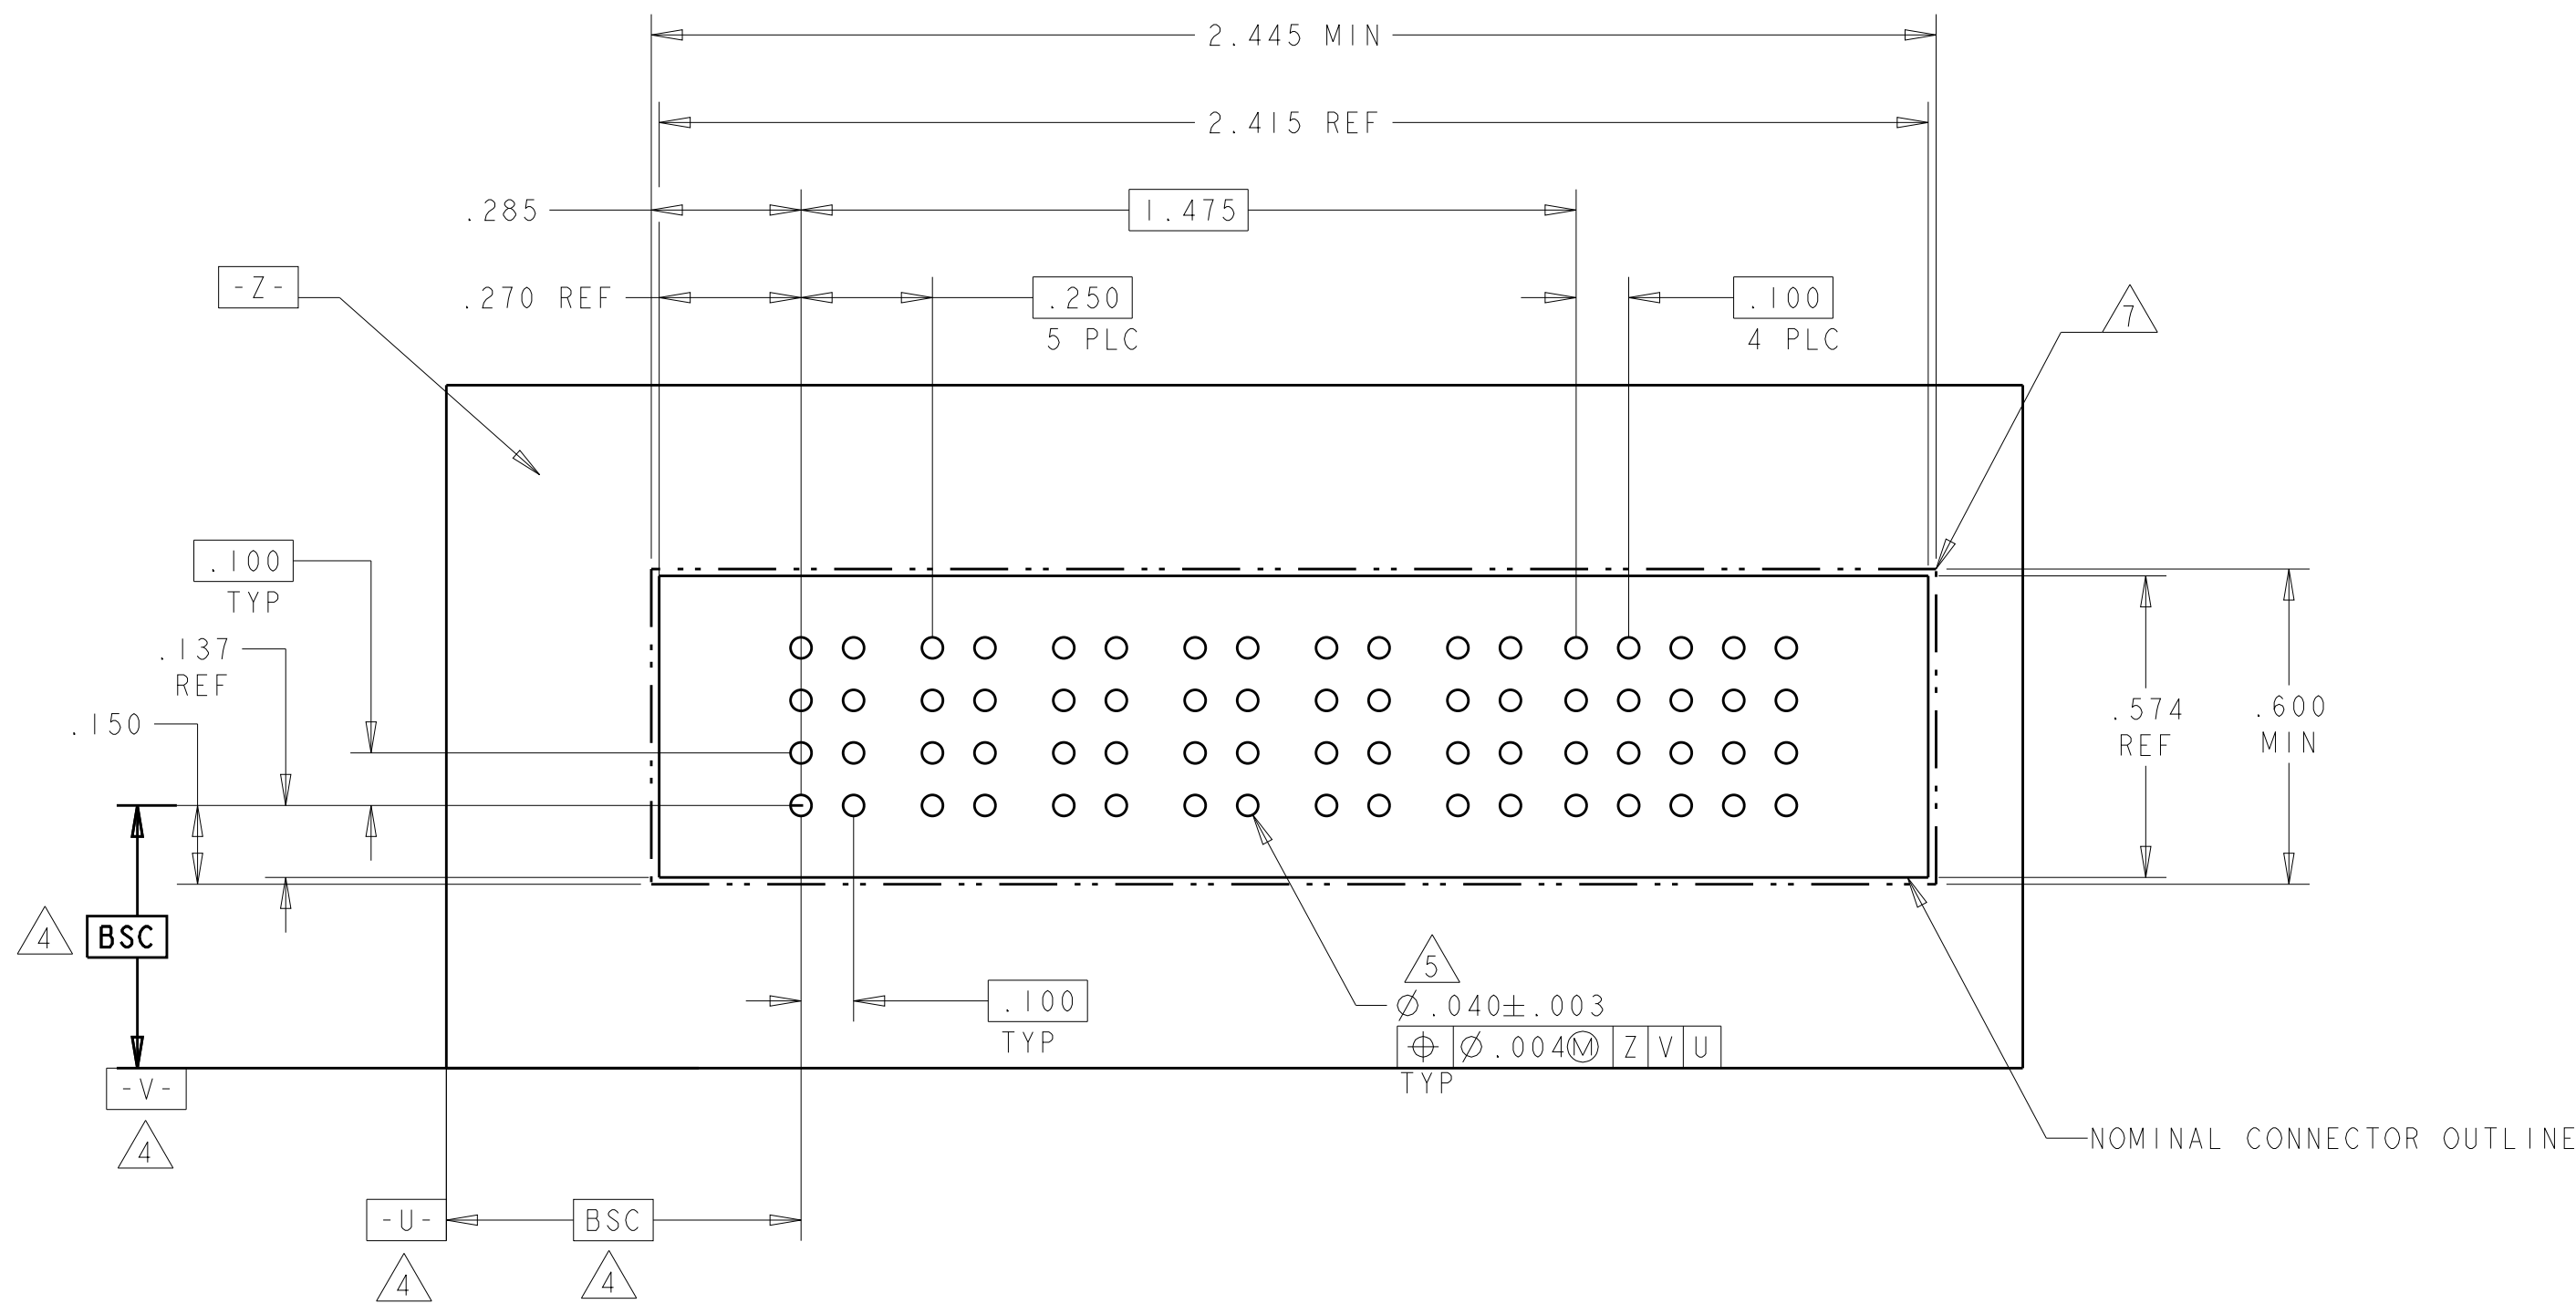4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL								POWER			
			P1	P2	P3	1	2	3	4	5	6	7	8	P4	P5	P6	
6450820-3	D C B A		VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	
						EV	EV	EV	EV	EV	EV	EV	EV				
						EV	EV	EV	EV	EV	EV	EV	EV				
						EV	EV	EV	EV	EV	EV	EV	EV				
3P + 32S + 3P																	

PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	1	2	P7	P8	P9	P10	P11	P12	
6450820-4	D C B A		VM	VM	VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	VM	VM	
									EV	EV							
									EV	EV							
									EV	EV							
6P + 8S + 6P																	

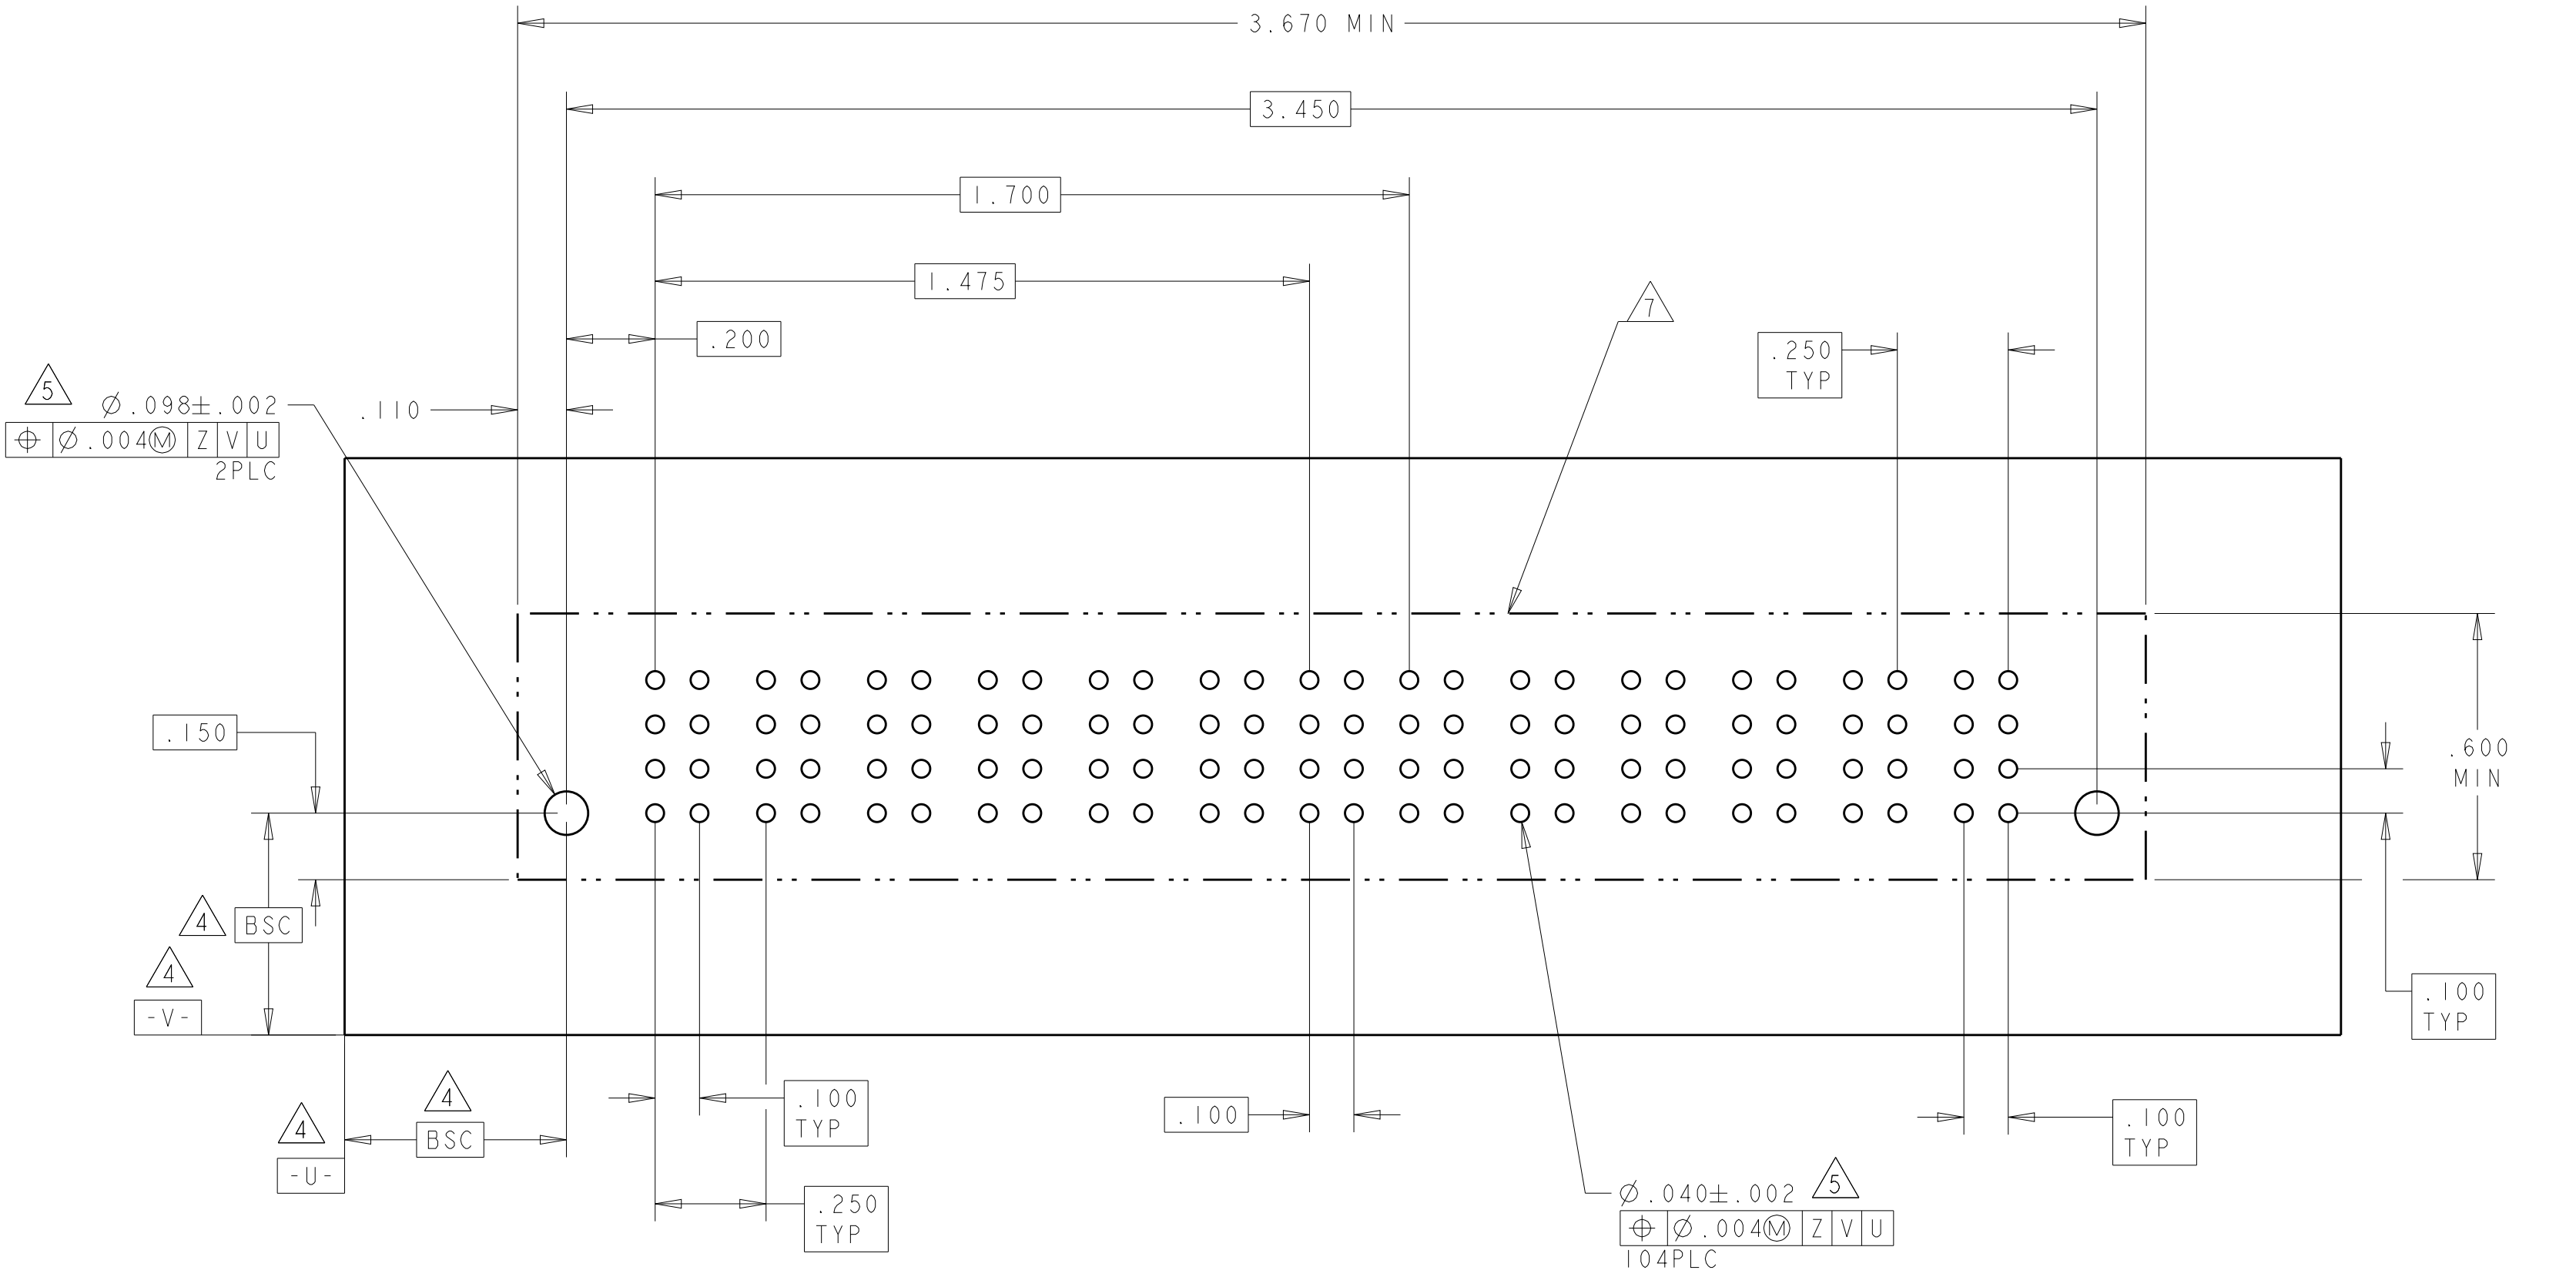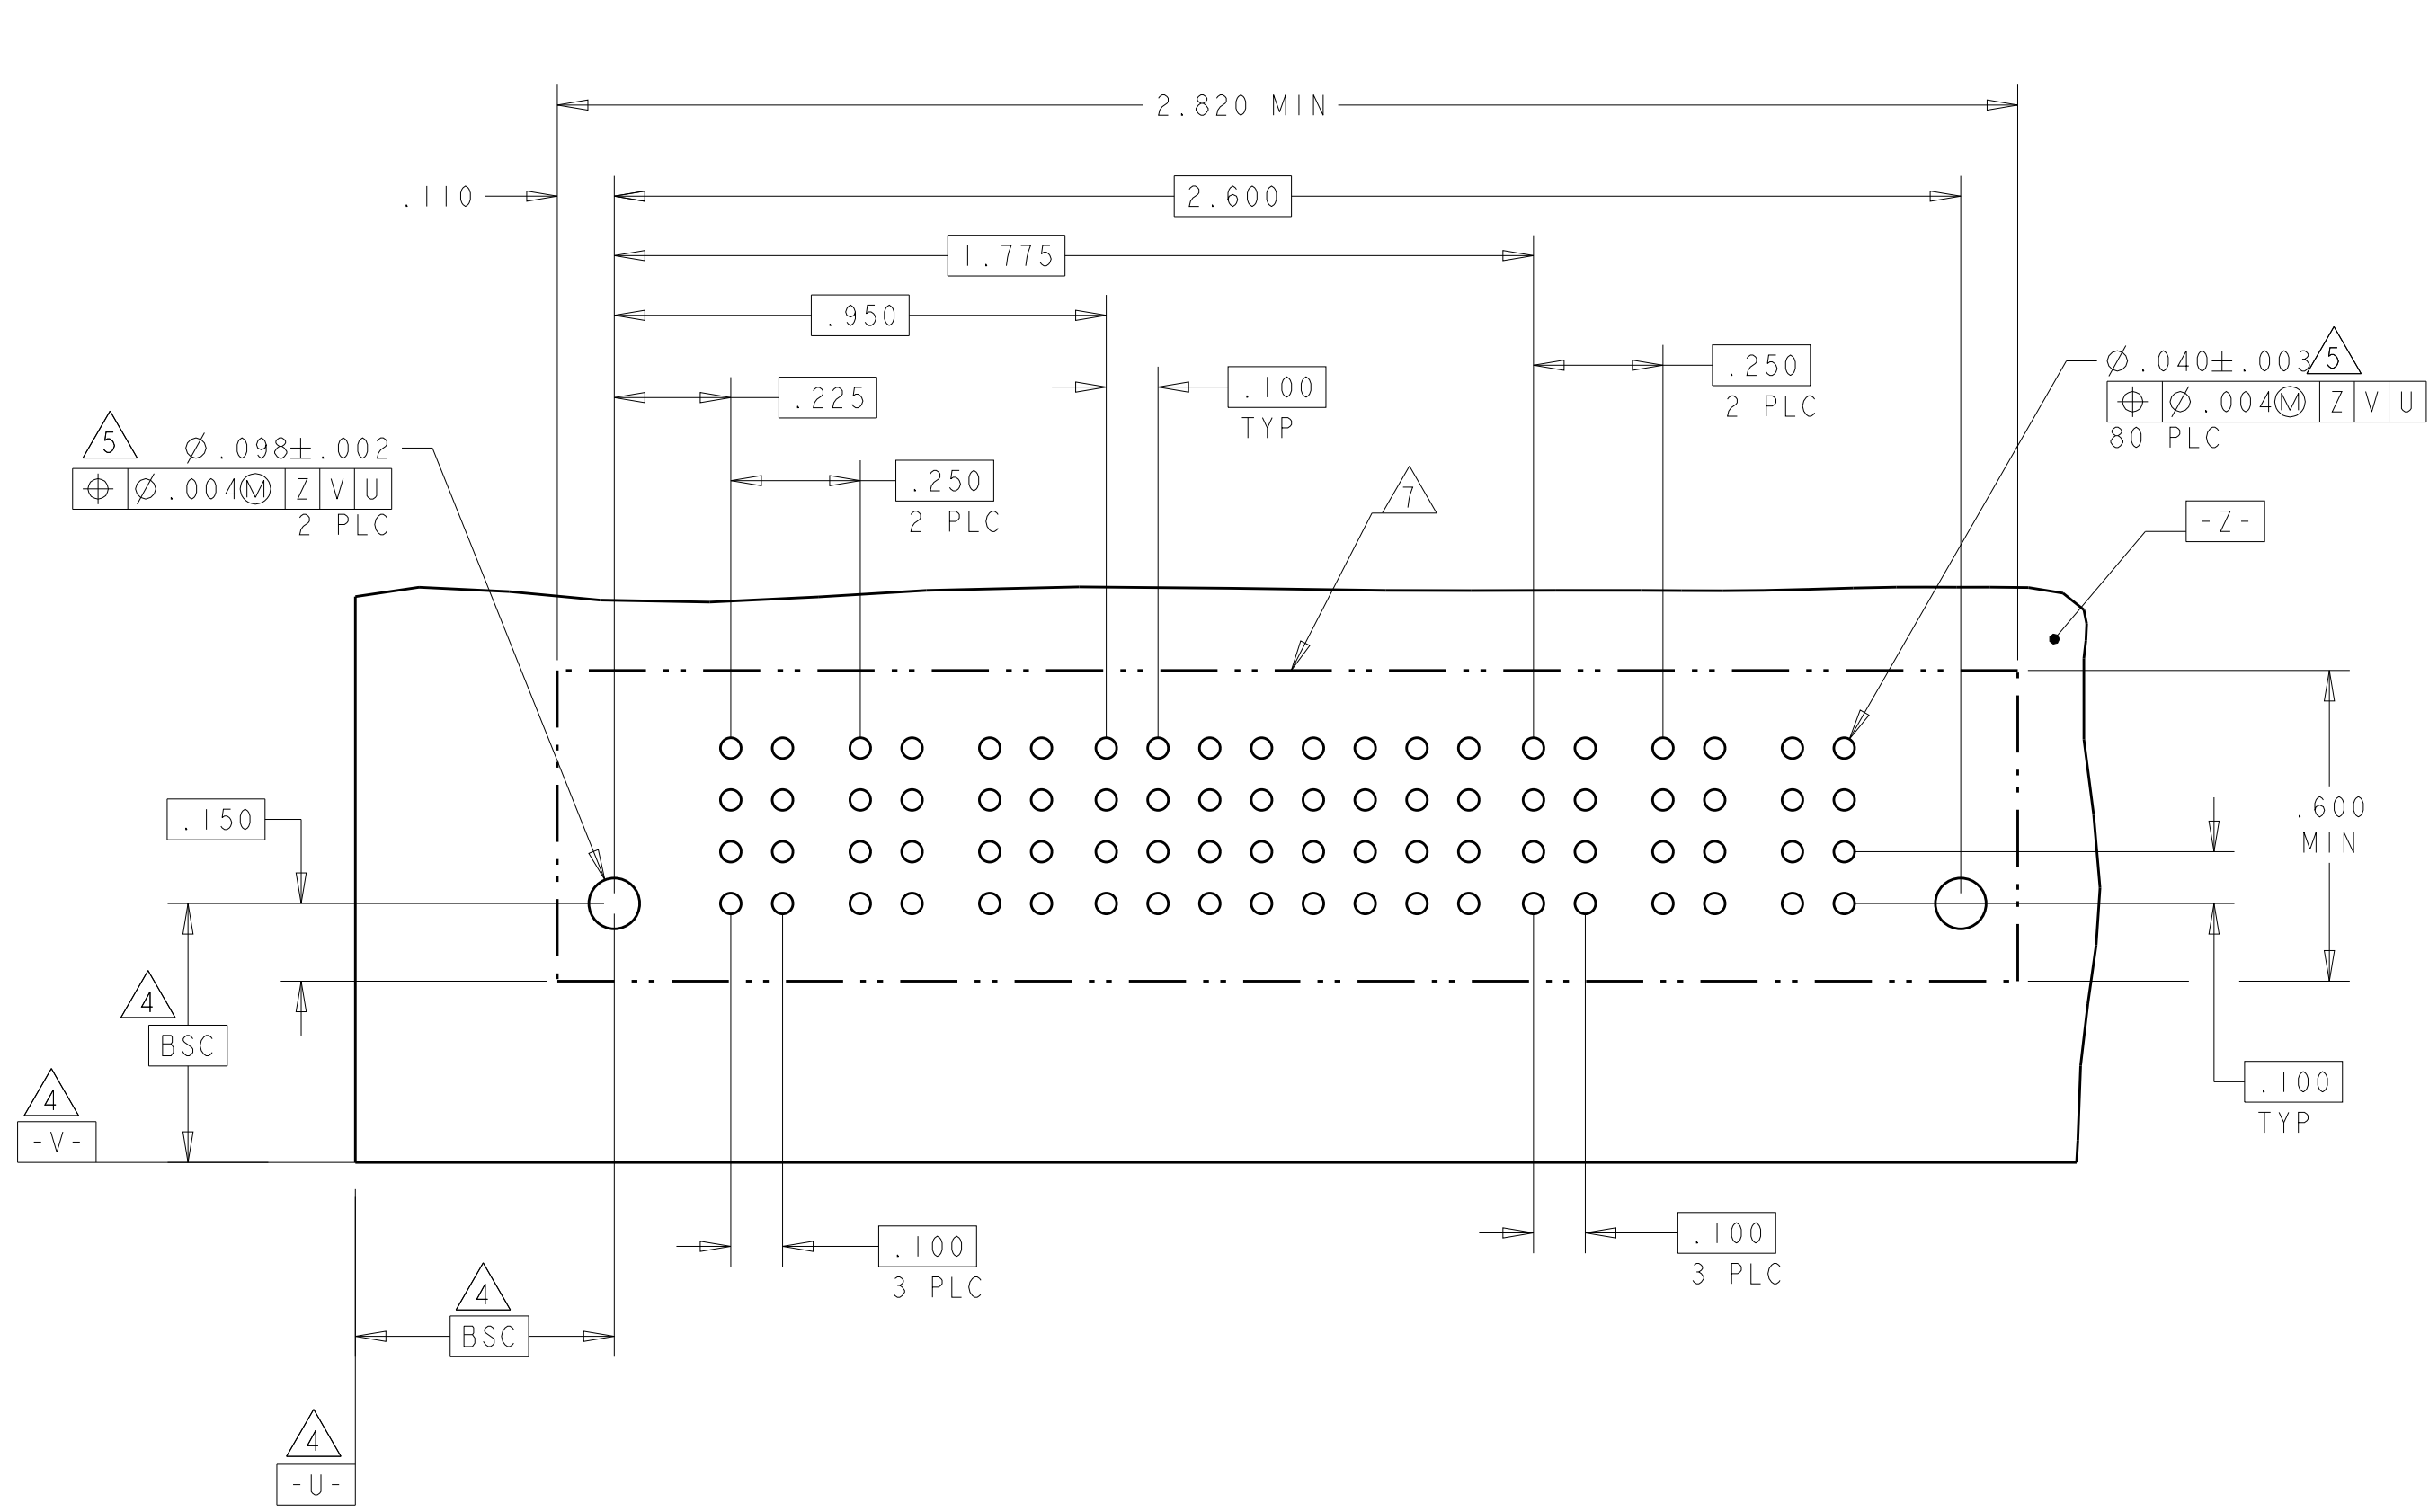




D

C


8

A


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER													SIGNAL				POWER	SIGNAL		
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10			
6450820-6	D C B A		VM		EV	EV	EV	EV		VM	VM		VM	EV	VM		VM	VM		EV	EV	EV	EV		EV	ES			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					ES	EV	EV	EV												EV	EV	EV	EV		EV	EV			
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																													

NO CONTACTS LOADED







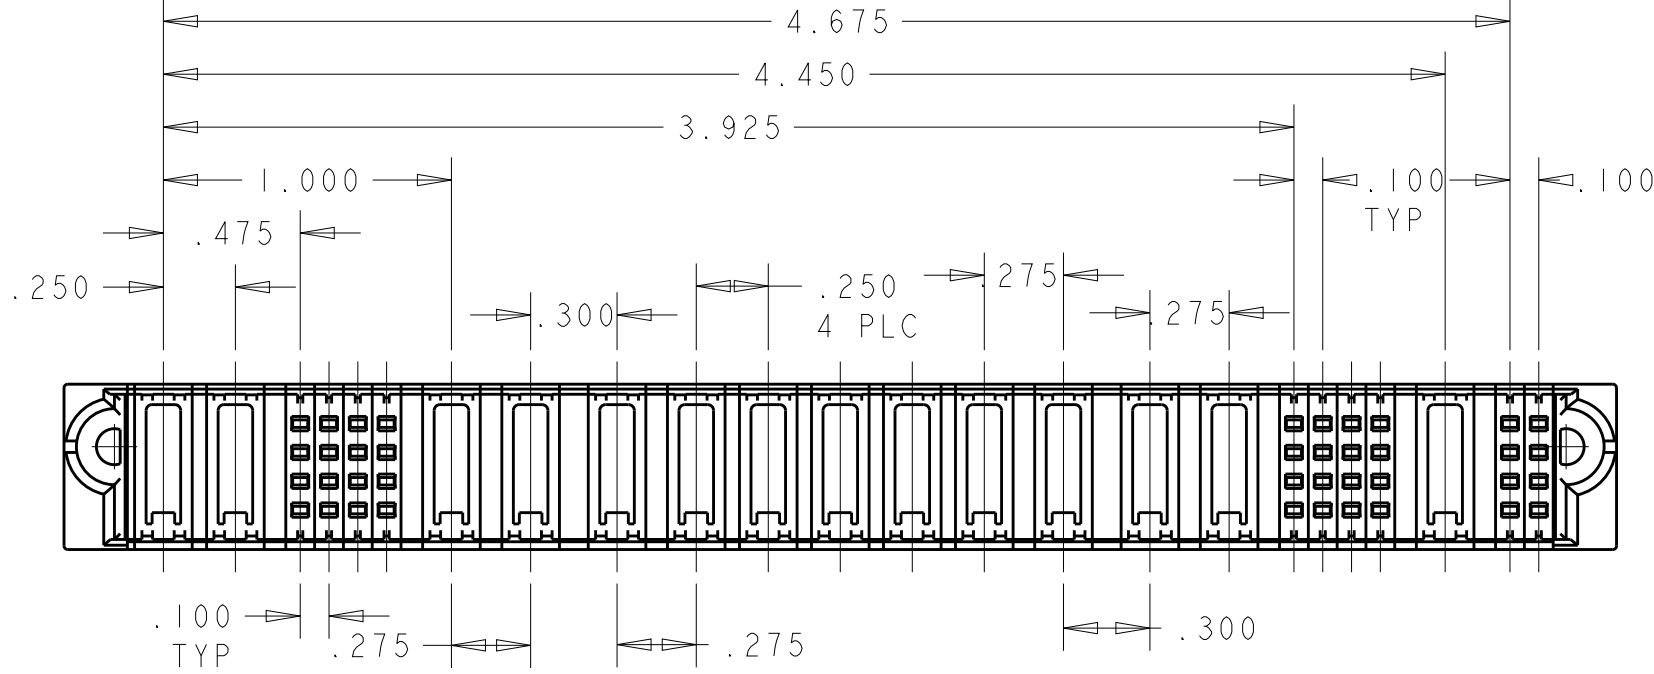


SCALE 3:2
6450820-6

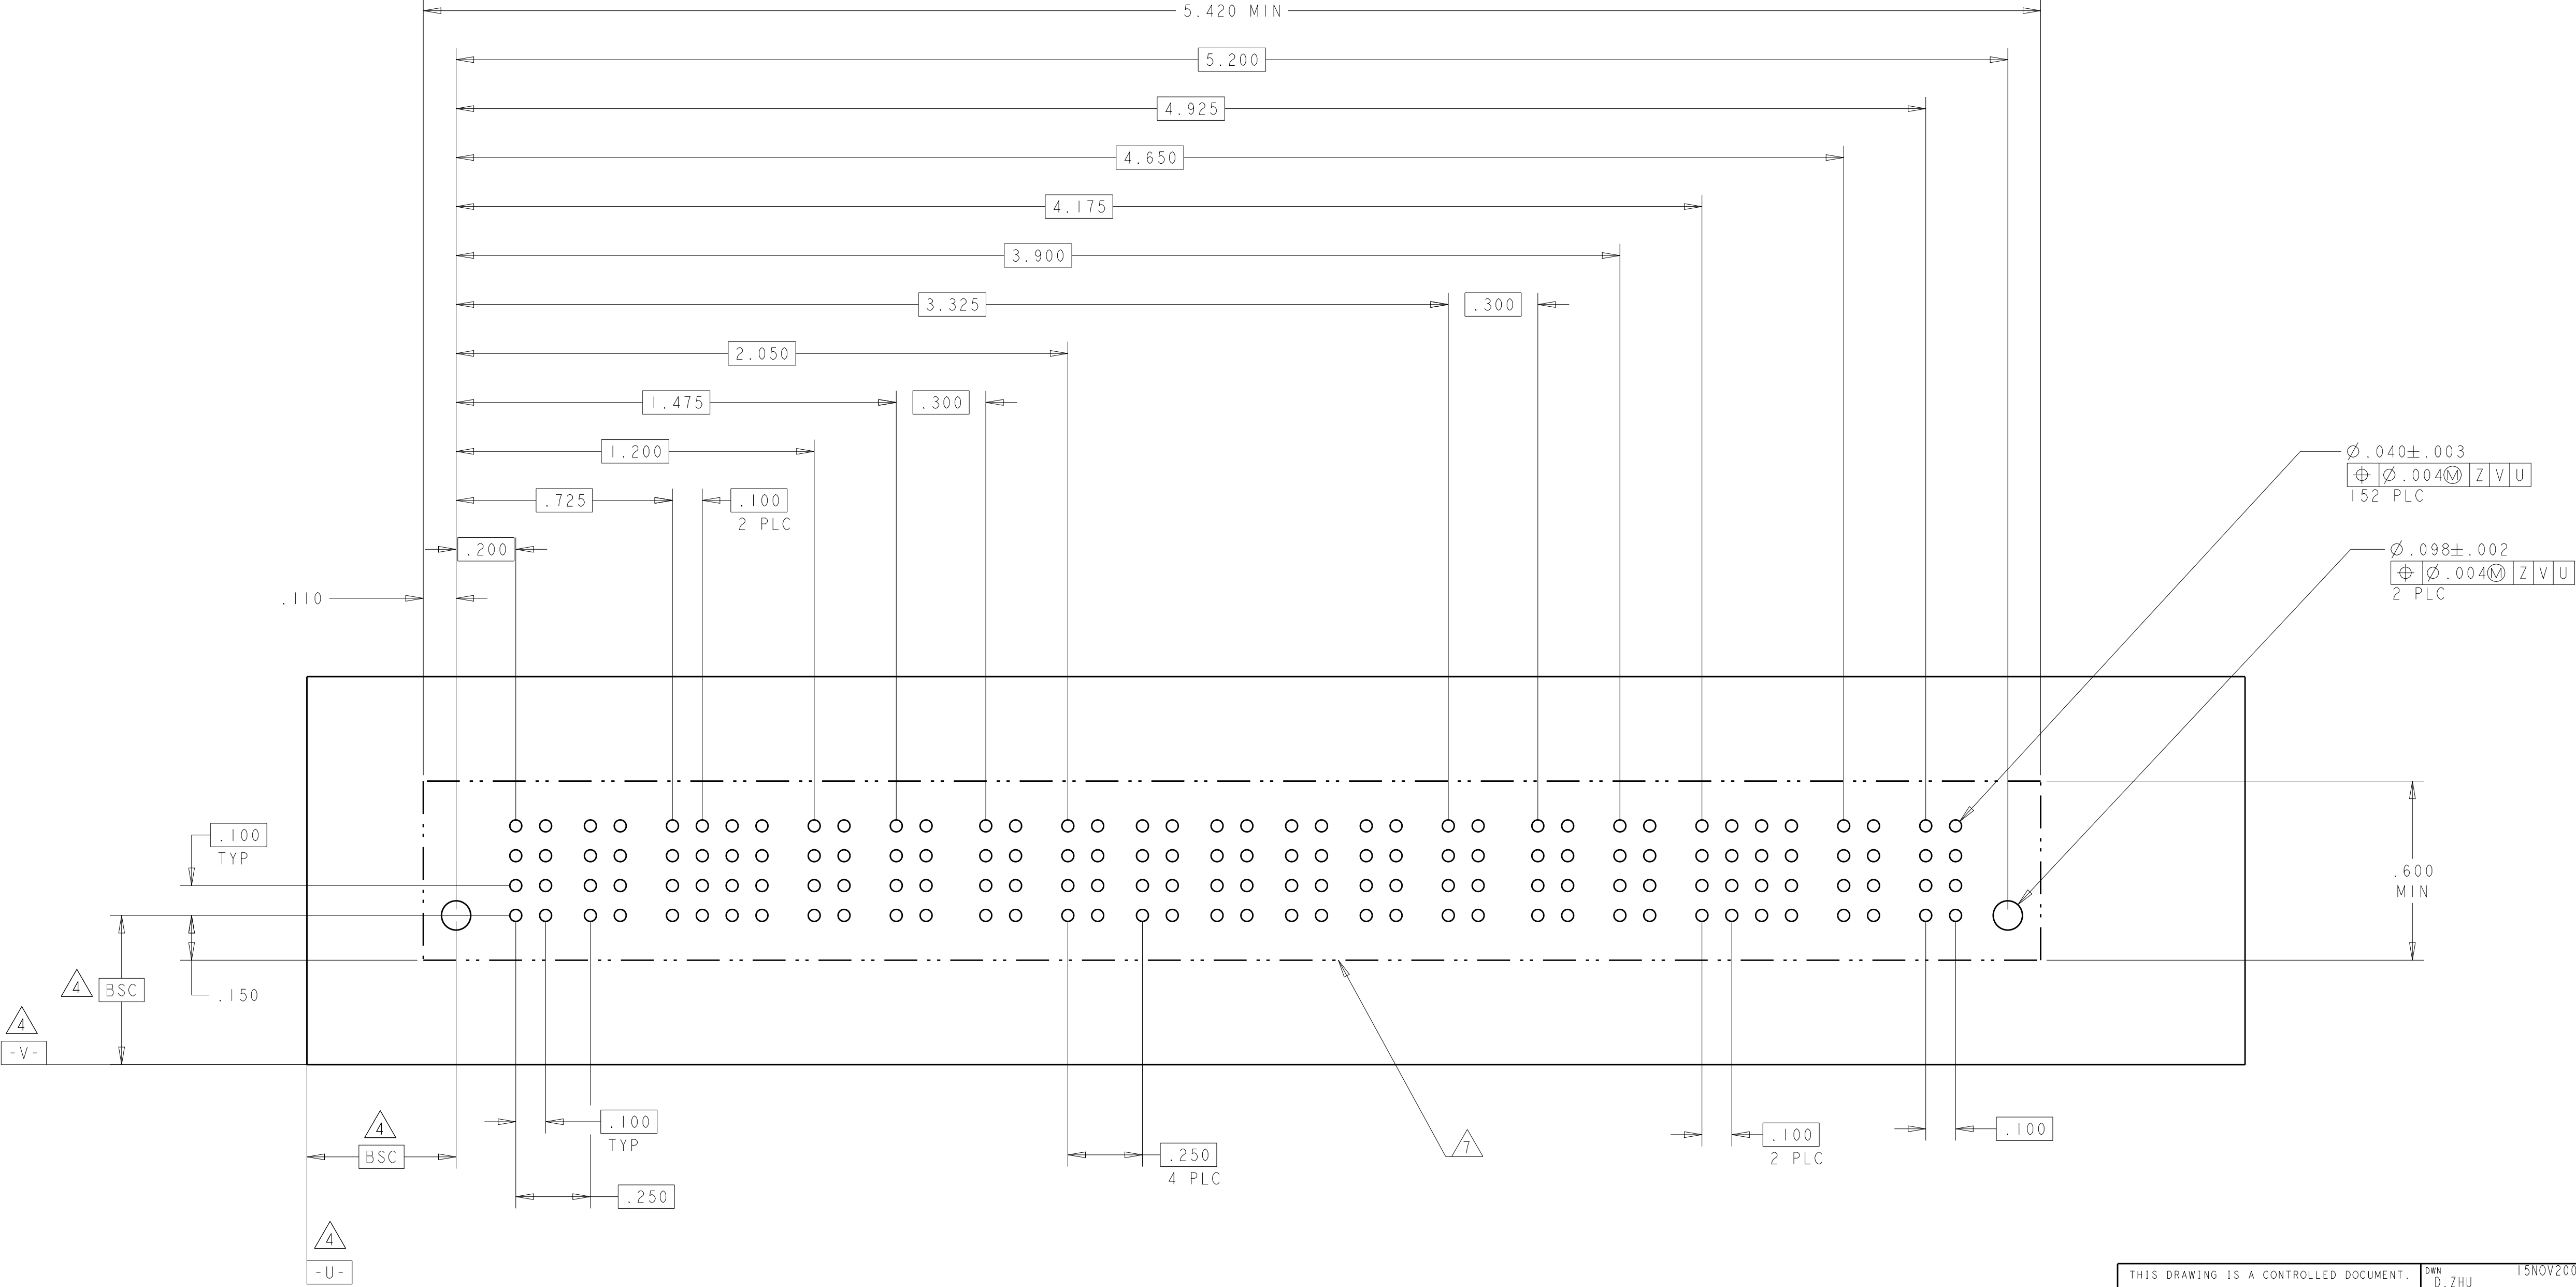


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	 TE Connectivity	
		CHK	S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	
INCHES					VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		PRODUCT SPEC			SIZE	
		108-2292				
		APPLICATION SPEC				
		114-13251				
		WEIGHT				
MATERIAL		FINISH			RESTRICTED TO	
					A100779C-6450820	
		Customer Drawing			SCALE - SHEET 9 OF 20 REV G8	


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER													SIGNAL				POWER	SIGNAL			
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10				
6450820-7	D C B A	 HD	VM		EV	EV	EV	EV		VM	VM		VM		VM		VM	VM		EV	EV	EV	EV		EV	ES	 HD			
					EV	EV	EV	EV												EV	EV	EV	EV		EF					
					EF	EV	EV	EV												EV	EV	EV	EV		EV					
					ES	EV	EV	EV												EV	EV	EV	EV		EV					
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																														

THE PCB LAYOUT IS THE SAME AS 6450820-6.
PLEASE SEE 6450820-6 FOR DETAIL DIM.


NO CONTACTS LOADED

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	D. ZHU	15NOV2007	 TE Connectivity								
				CHK	S. ZHAO	15NOV2007									
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD	S. ZHAO	-	NAME	VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE						
INCHES					PRODUCT SPEC										
		0 PLC			±"	108-2292									
		1 PLC			±.01	APPLICATION SPEC									
		2 PLC			±.005	114-13251									
MATERIAL		FINISH			WEIGHT	Customer Drawing			RESTRICTED TO						
-		-			-	A100779C=6450820			-						
						SCALE			-	SHEET	10	OF	20	REV	G8

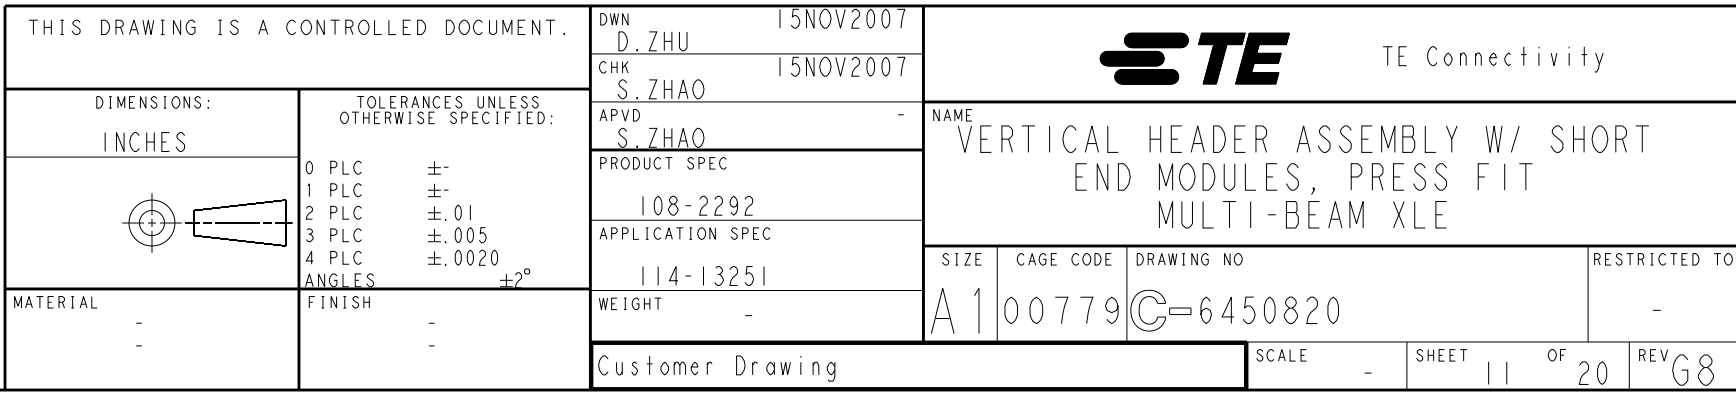



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	
I-6450820-1	D C B A		VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
									EV	EV	EV	EV	EV	EV							
									EV	EV	EV	EV	EV	EV							
									ES	EV	EV	EV	EV	EV							
6P + 24S + 6P																					

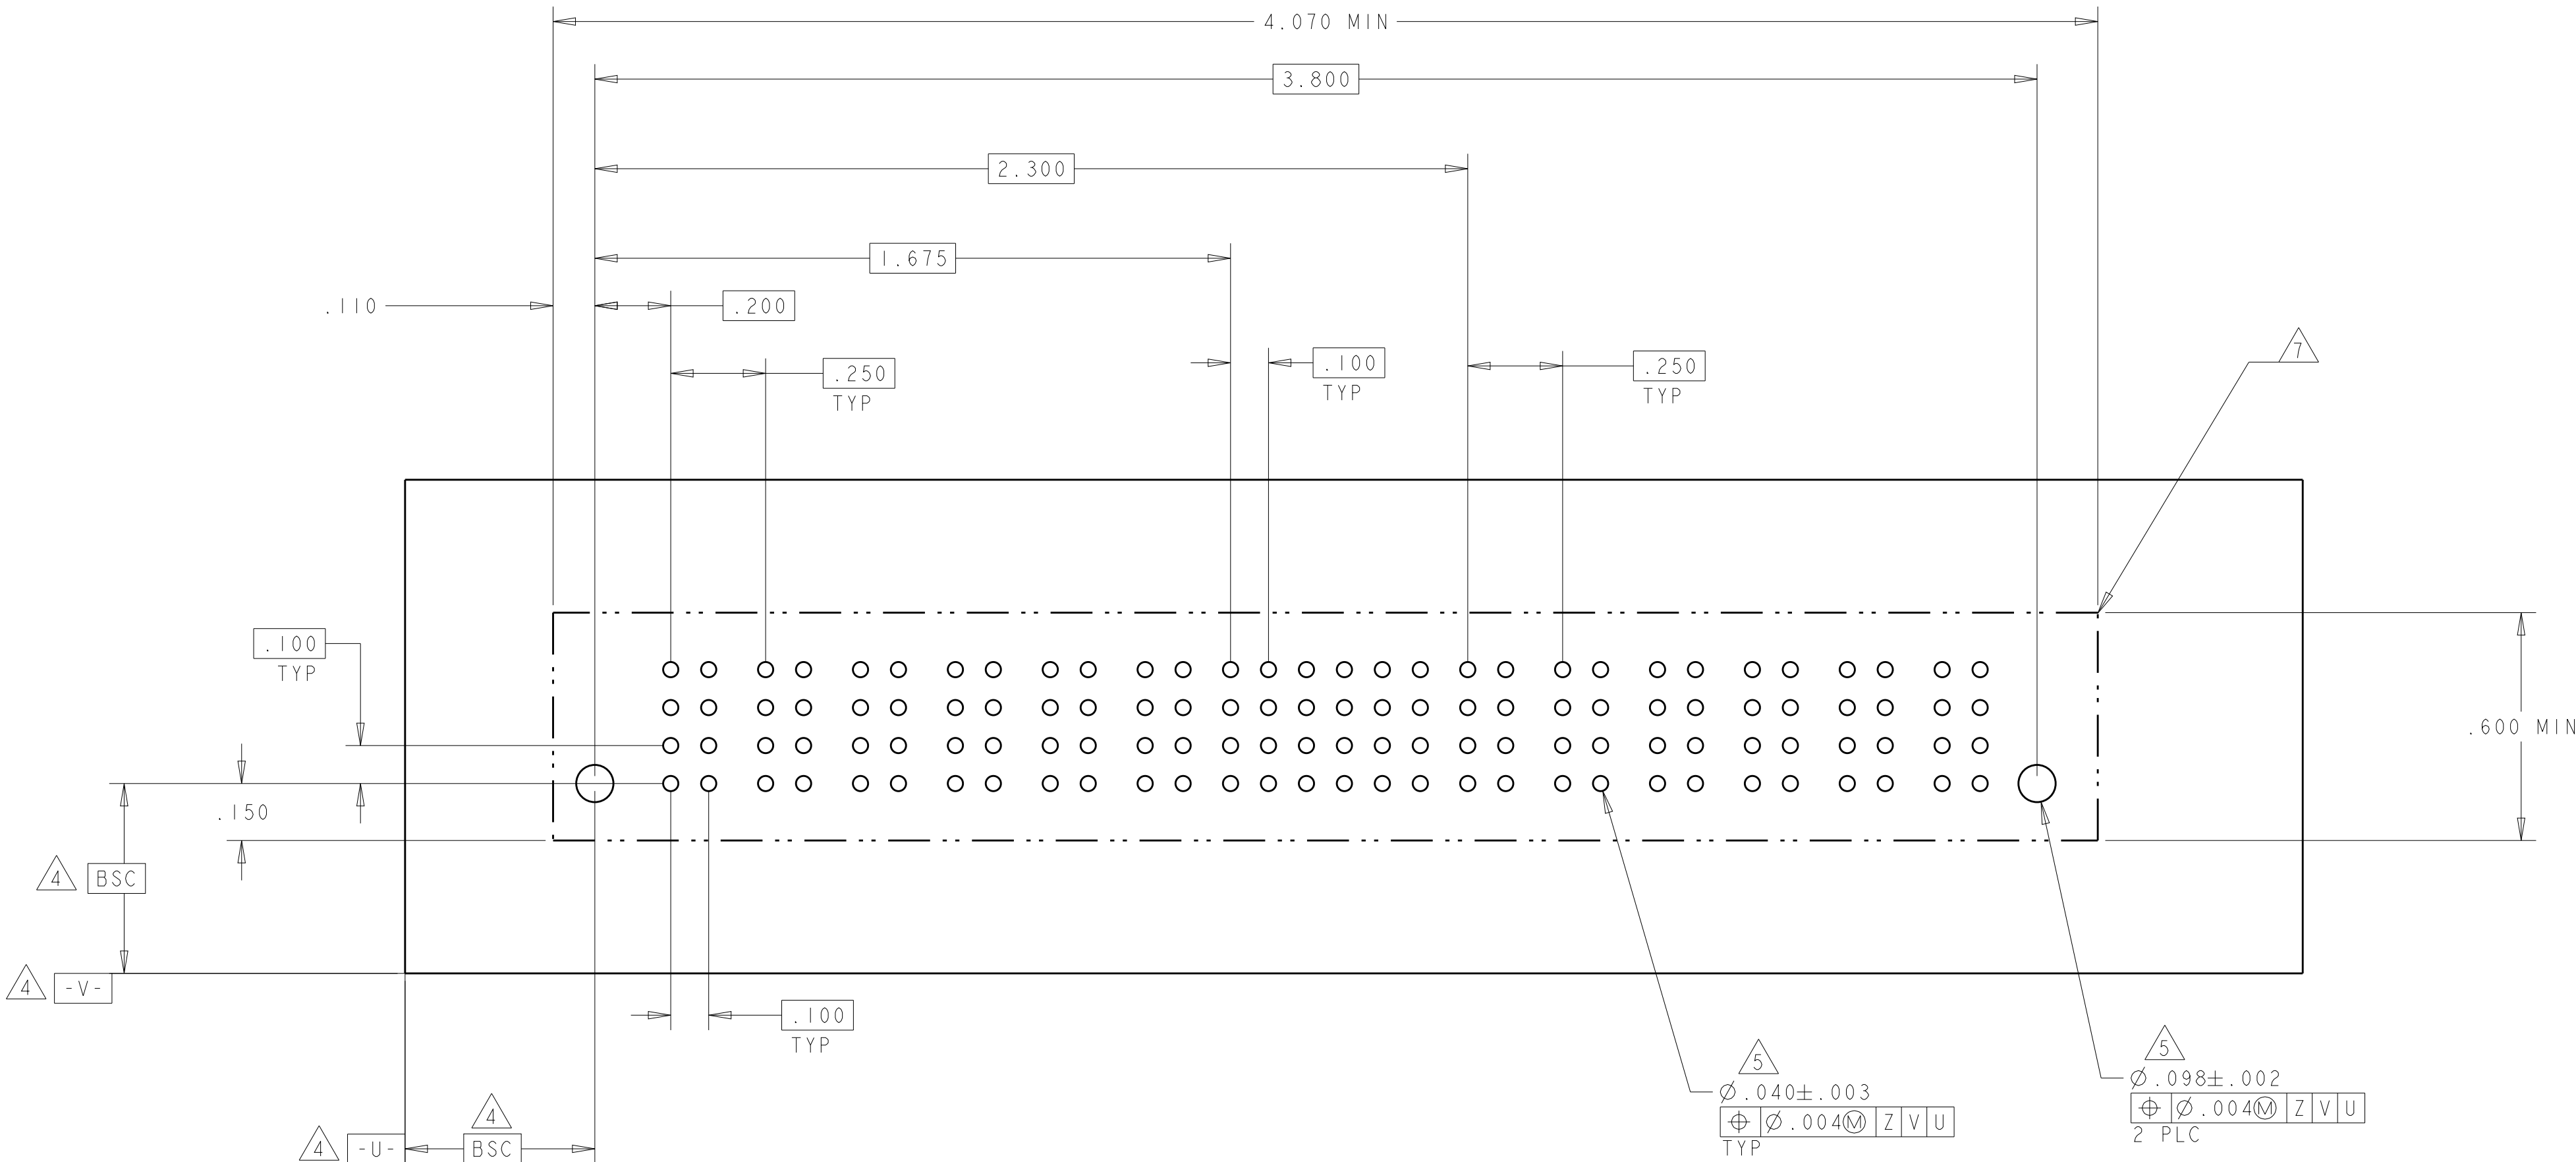

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	 TE Connectivity	
		CHK	S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	
INCHES		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2°				
		PRODUCT SPEC			VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		108-2292				
		APPLICATION SPEC			SIZE	
		114-13251				
MATERIAL		WEIGHT			CASE CODE	
-		-			DRAWING NO	
		Customer Drawing			RESTRICTED TO	
					A100779C=6450820	
					SCALE	
					- SHEET	
					12 OF 20	
					REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
1-6450820-3	D					EV	EV	EV	EV	EV	EV				
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3ACP + 24S + 3ACP															

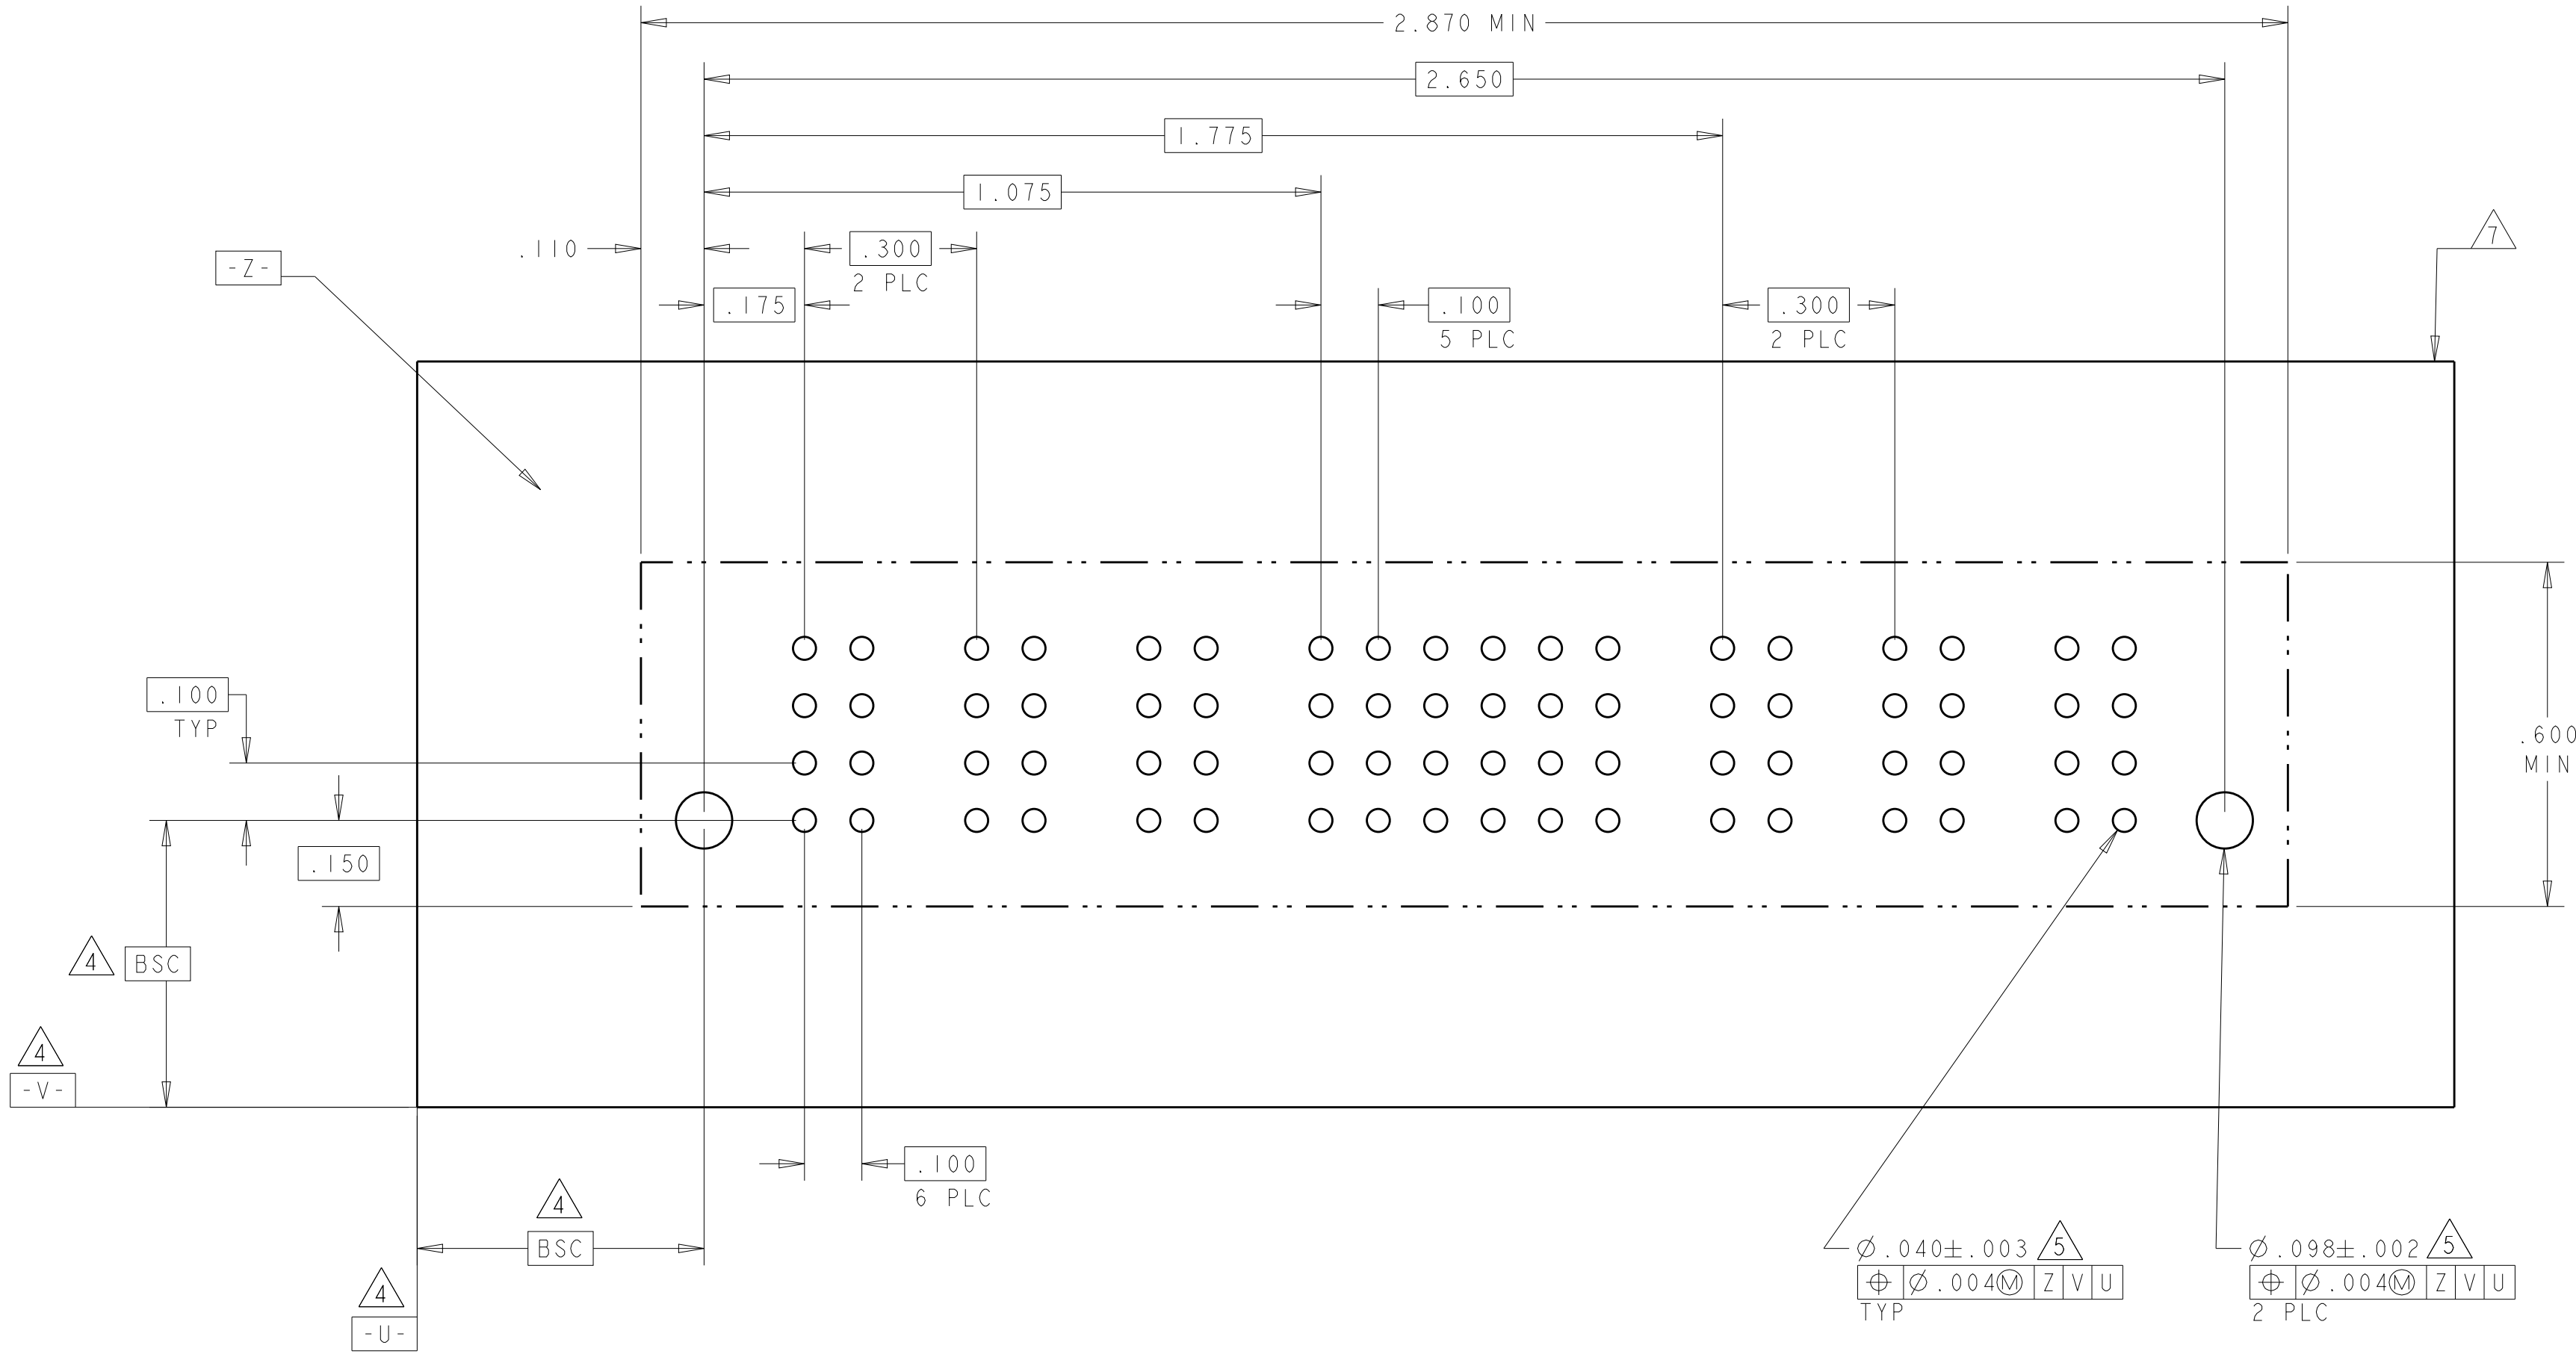

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±
1 PLC ±
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450820

RESTRICTED TO
-

SCALE
-

SHEET
13

OF
20


REV
G8

TE Connectivity

TE

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER												SIGNAL																																																																																																																																																																																						
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4	5	6	7	8	9	10	11	12																																																																																																																																																																											
I-6450820-7	D C B A																																																																																																																																																																																																				

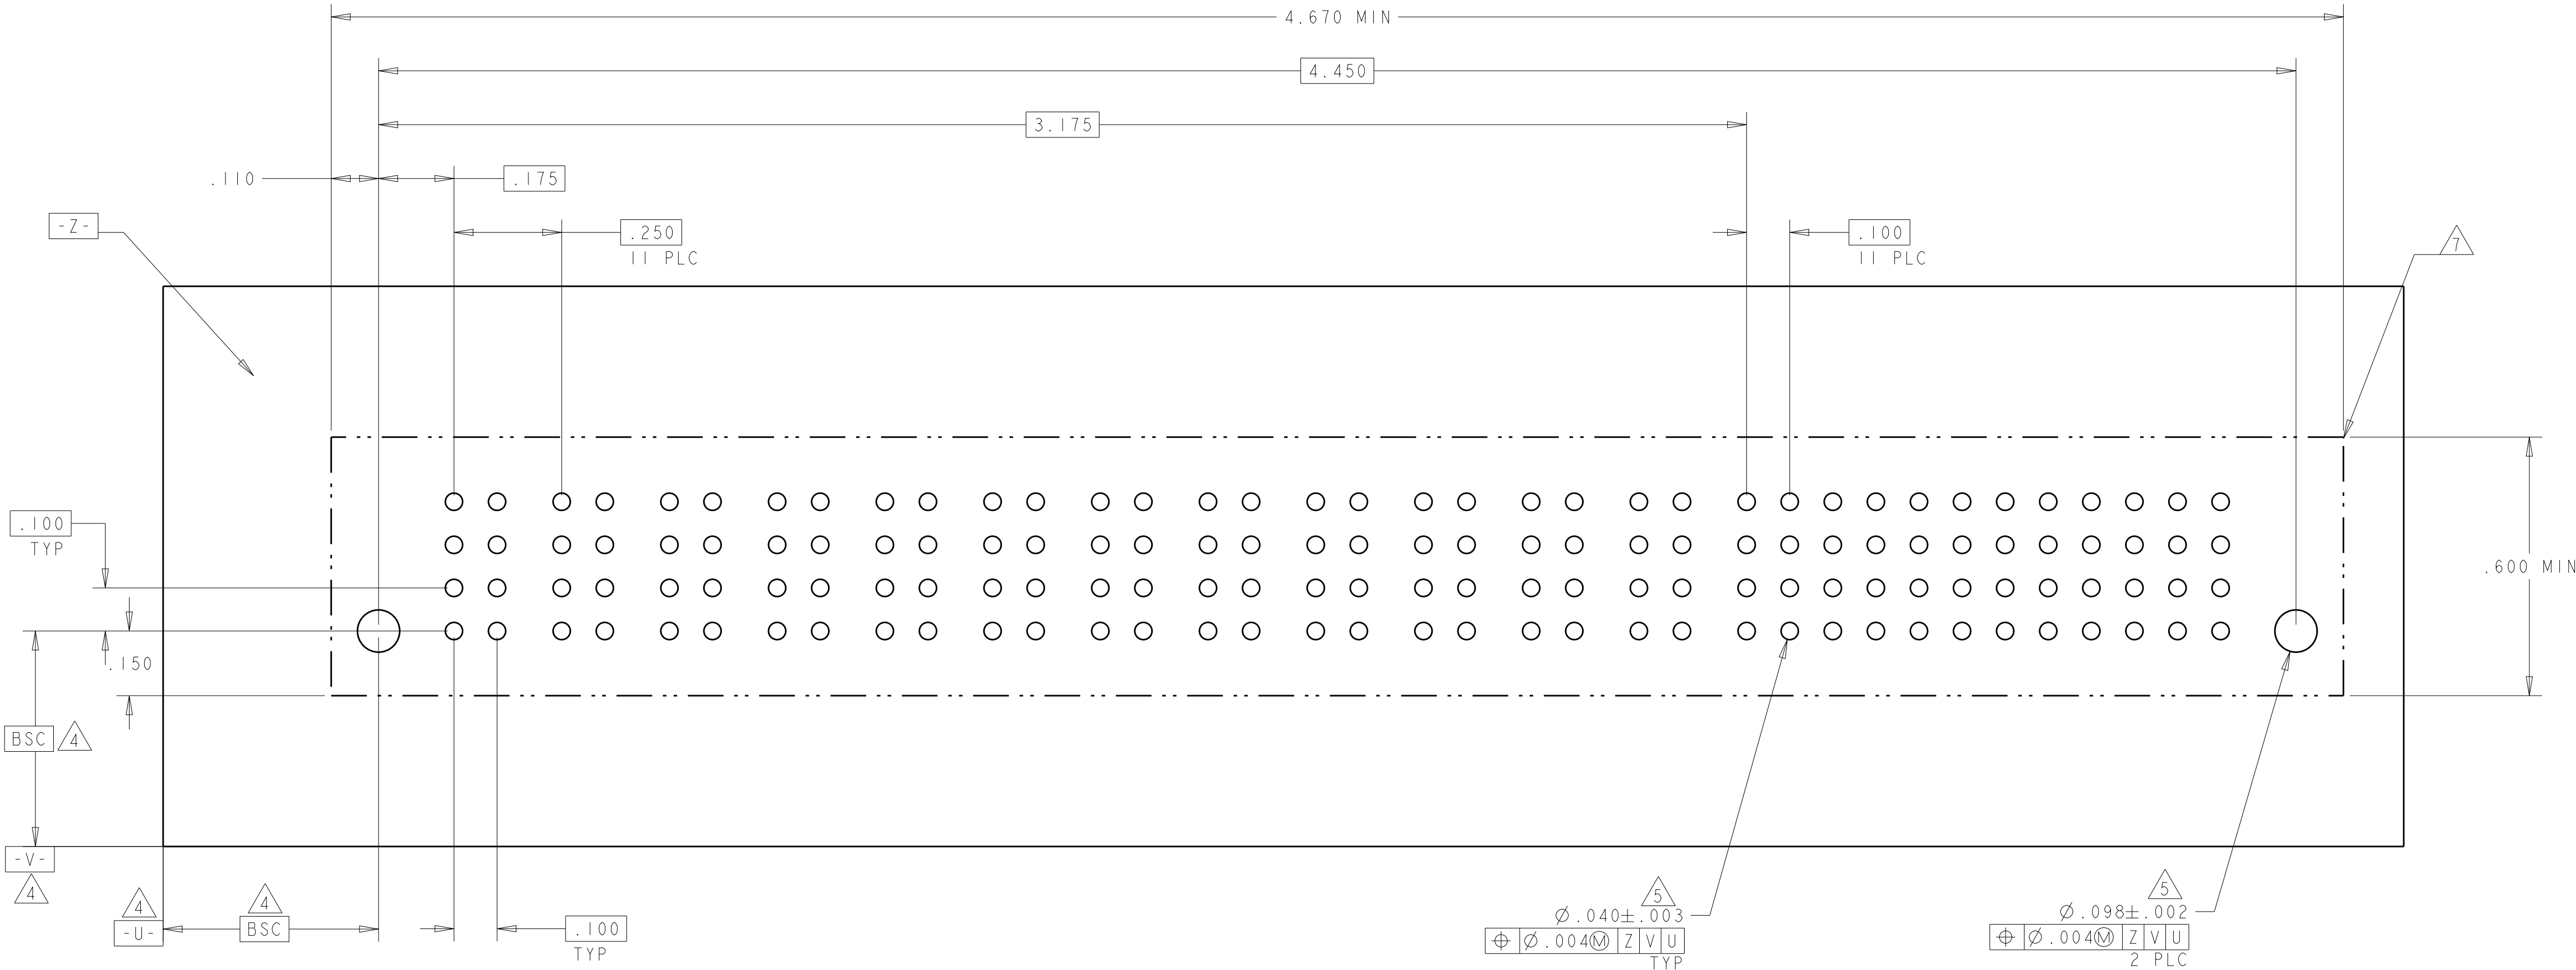

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450820

RESTRICTED TO
-

Customer Drawing

SCALE
-


SHEET
14

OF
20

REV
G8

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL												POWER						
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	9	10	11	12	P6	P7	P8	P9	P10		
1-6450820-8	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM		
								EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV						EV	EV
								EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV						EV	EV
								EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV						EV	EV
5P + 48S + 5P																										

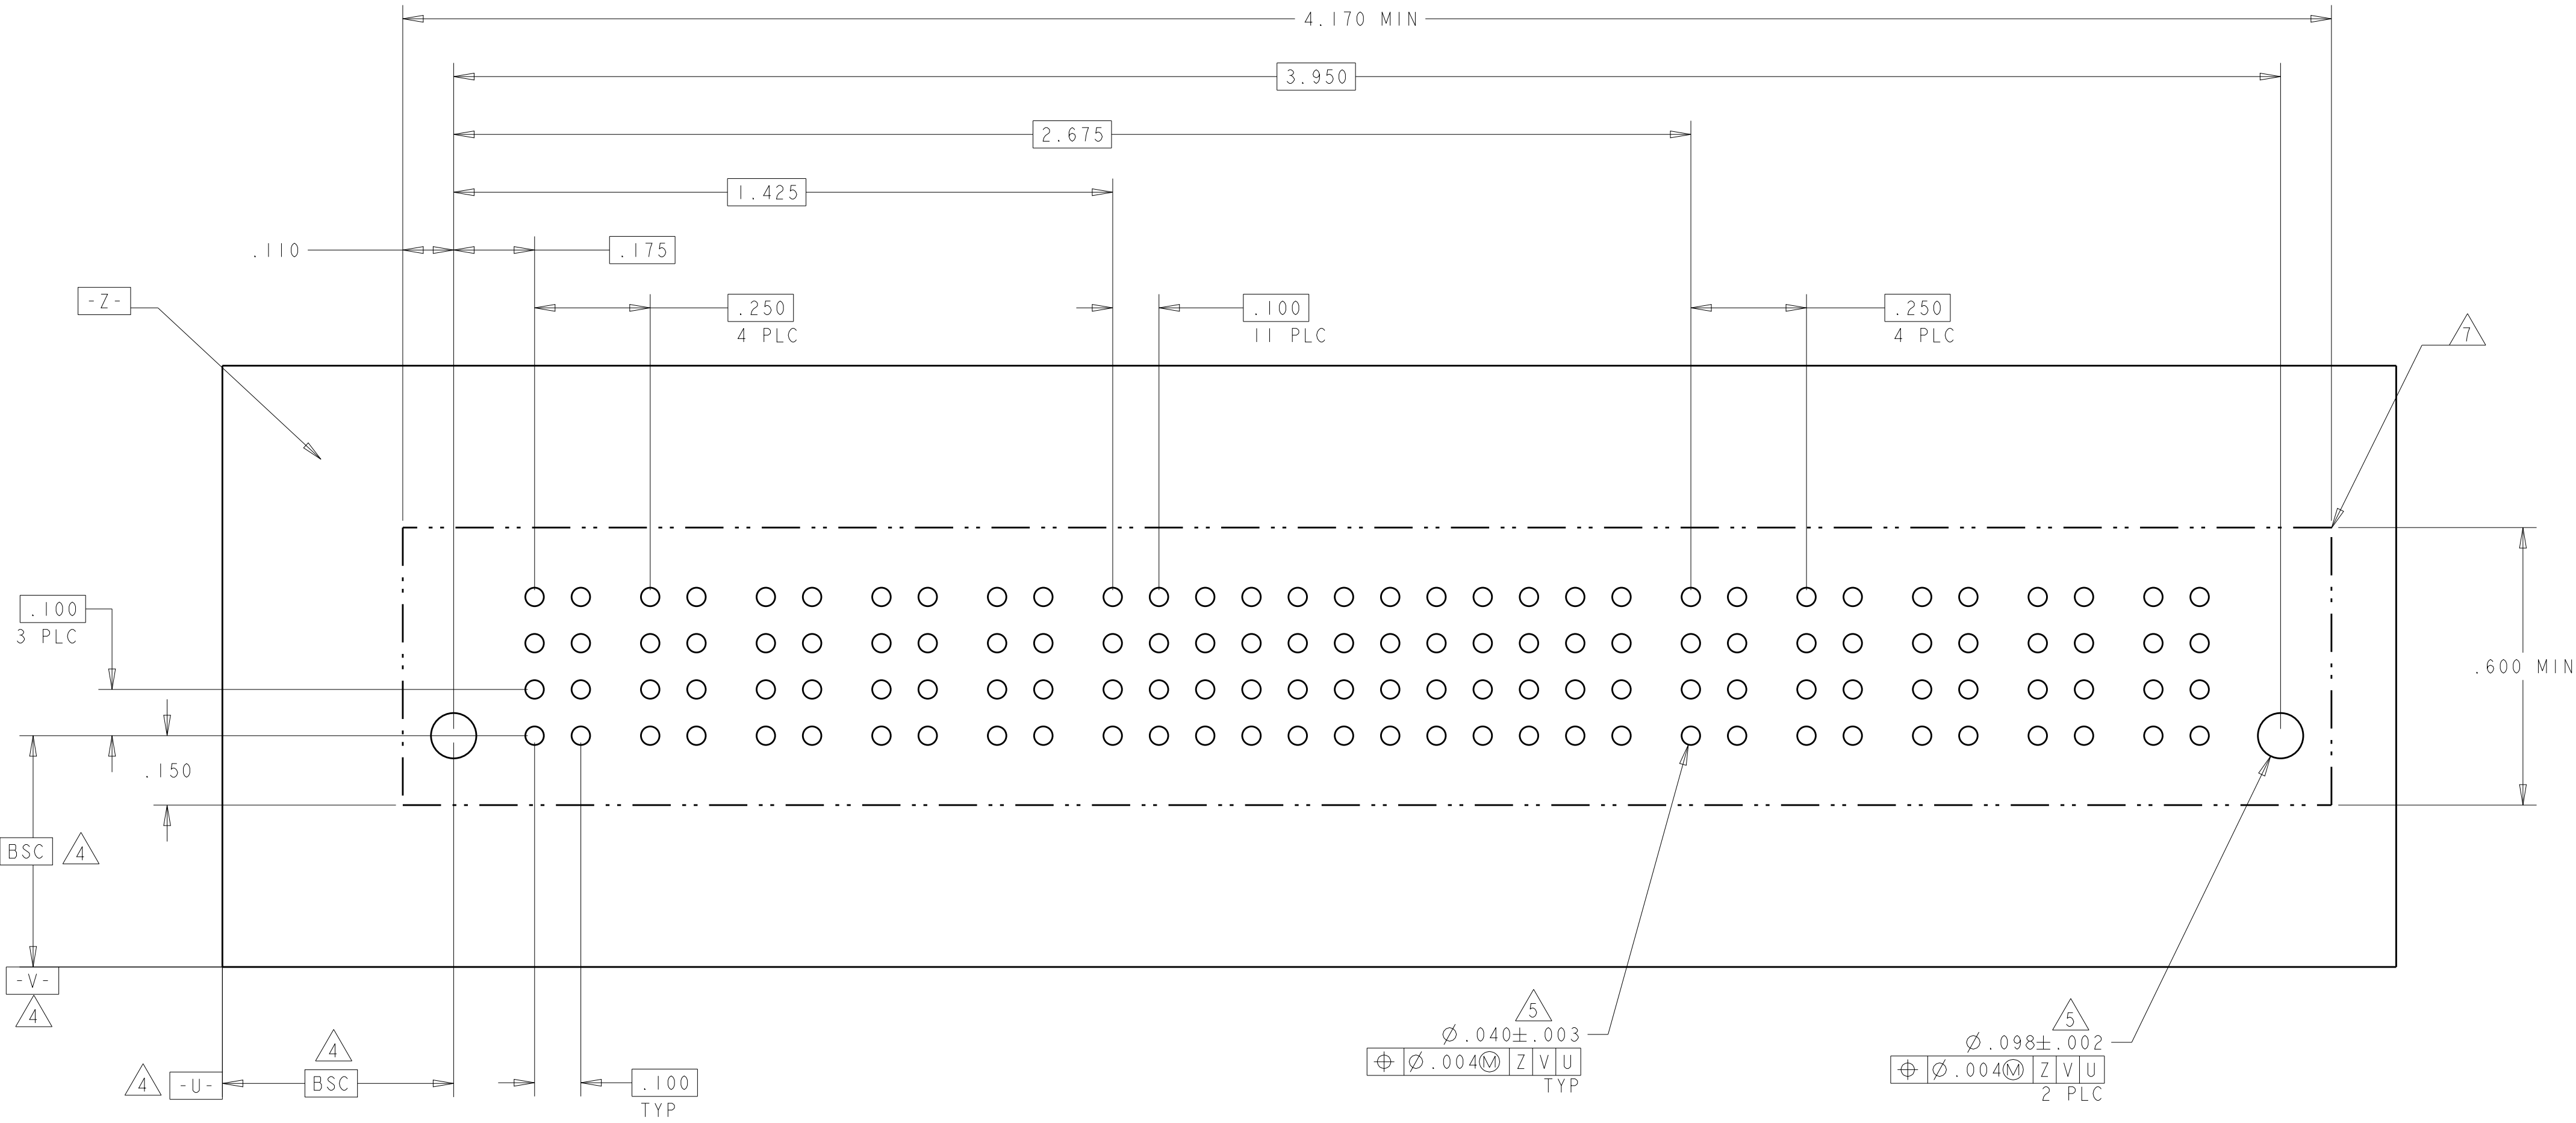

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT -

MATERIAL -

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450820

RESTRICTED TO
-

SCALE
-

SHEET
15

OF
20

REV
G8


TE Connectivity

Technical drawing of a rectangular plate with dimensions and features. The overall dimensions are 3.570 MIN (width) and .600 MIN (height). The drawing includes a grid of 20 columns and 4 rows of holes. Key dimensions and features are as follows:


- Overall width: 3.570 MIN
- Overall height: .600 MIN
- Top edge dimensions (from left):
 - .110 (to first hole center)
 - 2.050 (to center of 12th hole)
 - 1.425 (to center of 18th hole)
 - .250 (to center of 20th hole)
- Bottom edge dimensions (from left):
 - .100 (to center of 1st hole)
 - .200 (to center of 2nd hole)
 - .250 (to center of 3rd hole)
 - .100 (to center of 4th hole)
- Right edge dimensions (from right):
 - .250 (to center of 18th hole)
 - .100 (to center of 12th hole)
 - .250 (to center of 2nd hole)
 - .110 (to center of 1st hole)
- Grid of holes: 20 columns, 4 rows. Hole diameter is $\varnothing .004$ (TYP).
- Features and Callouts:
 - Top left: -Z-
 - Top center: 4 PLC
 - Top right: 4 PLC
 - Bottom left: 4 BSC, -V-, -U-, 4 BSC
 - Bottom center: 5 .040 ± .003 (TYP)
 - Bottom right: 5 .098 ± .002 (TYP)
 - Right edge: 7


4805 (3/11)

PART NUMBER	ROWS		LOW POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
2-6450820-1	D C B A							EV	EV	EV	EV	EV	EV					
								EV	EV	EV	EV	EV	EV					
								EV	EV	ES	EV	EV	EV					
								EV	EV	EV	EV	EV	EV					
6LP + 24S + 3P																		

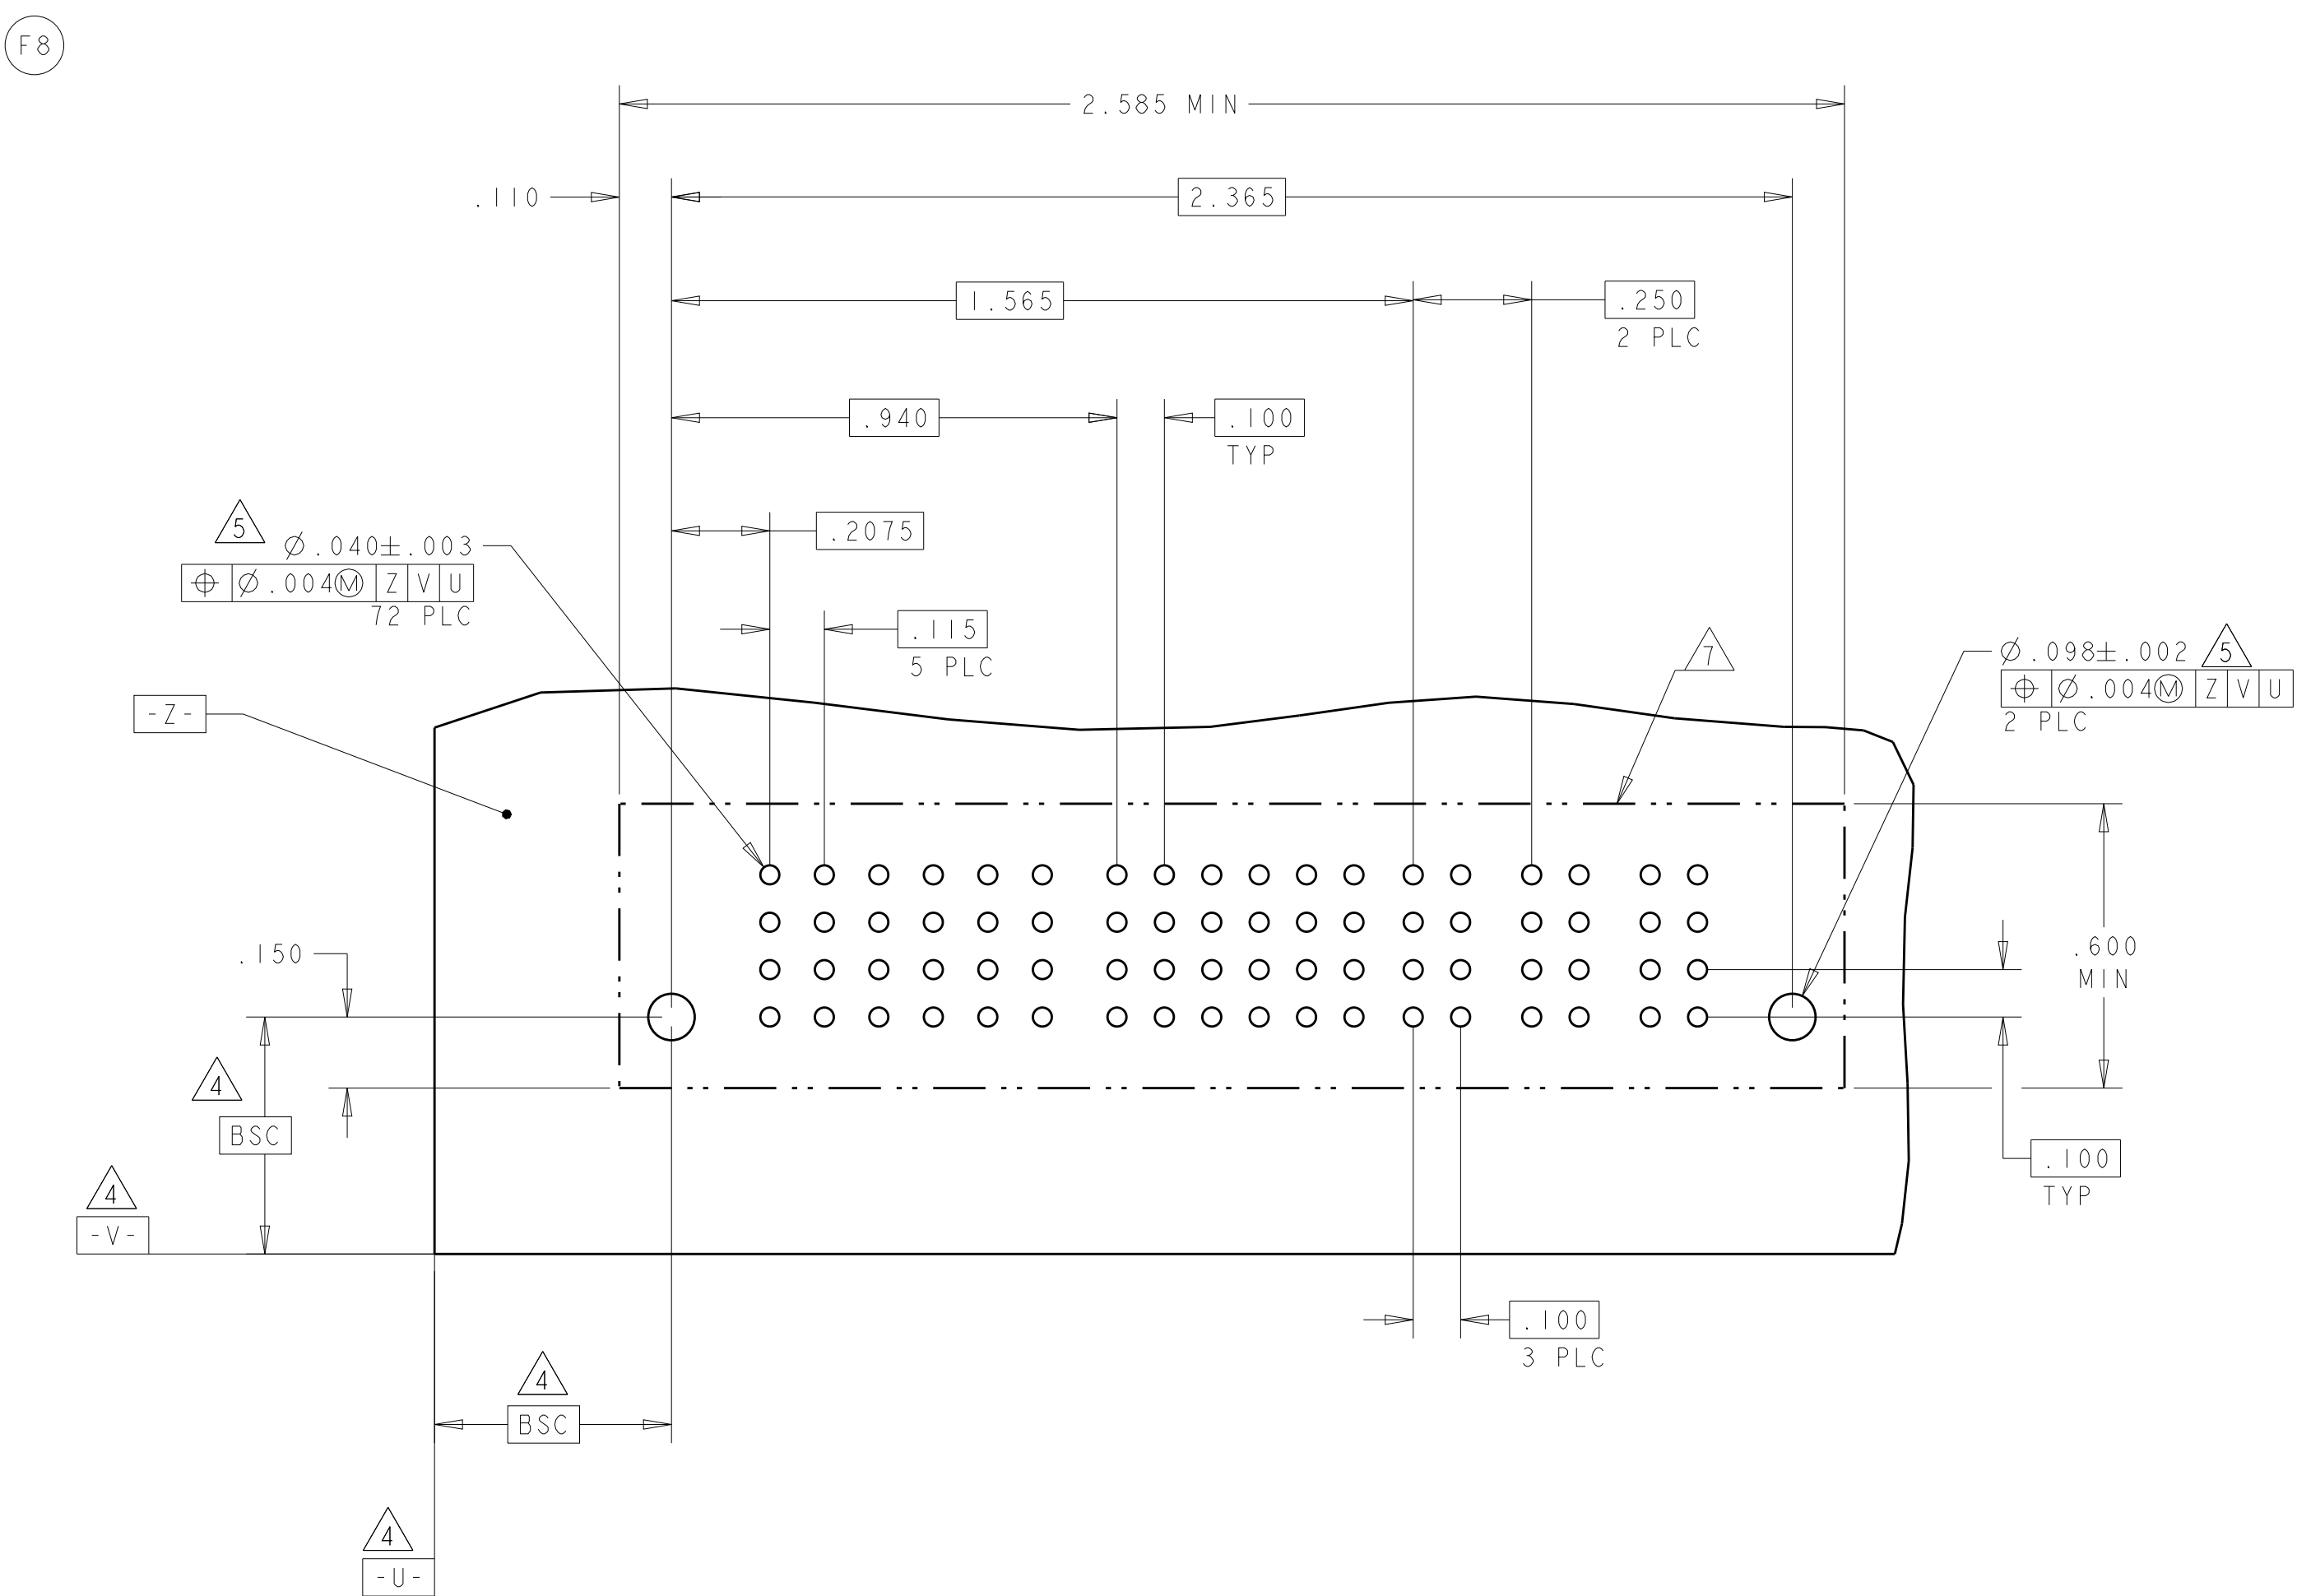
4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL	
			P1	P2	P3	P4	I	
2-6450820-2	D C B A					EV		
						EV		
						EV		
						EV		
4ACP + 4S								

PART NUMBER	ROWS		POWER								SIGNAL																		POWER															
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	P9	P10	P11	P12	P13	P14	P15	P16								
6450820-9	D C B A		VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV								
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
8P + 72S + 8P																																												


THE PCB LAYOUT IS THE SAME AS 6450820-8.

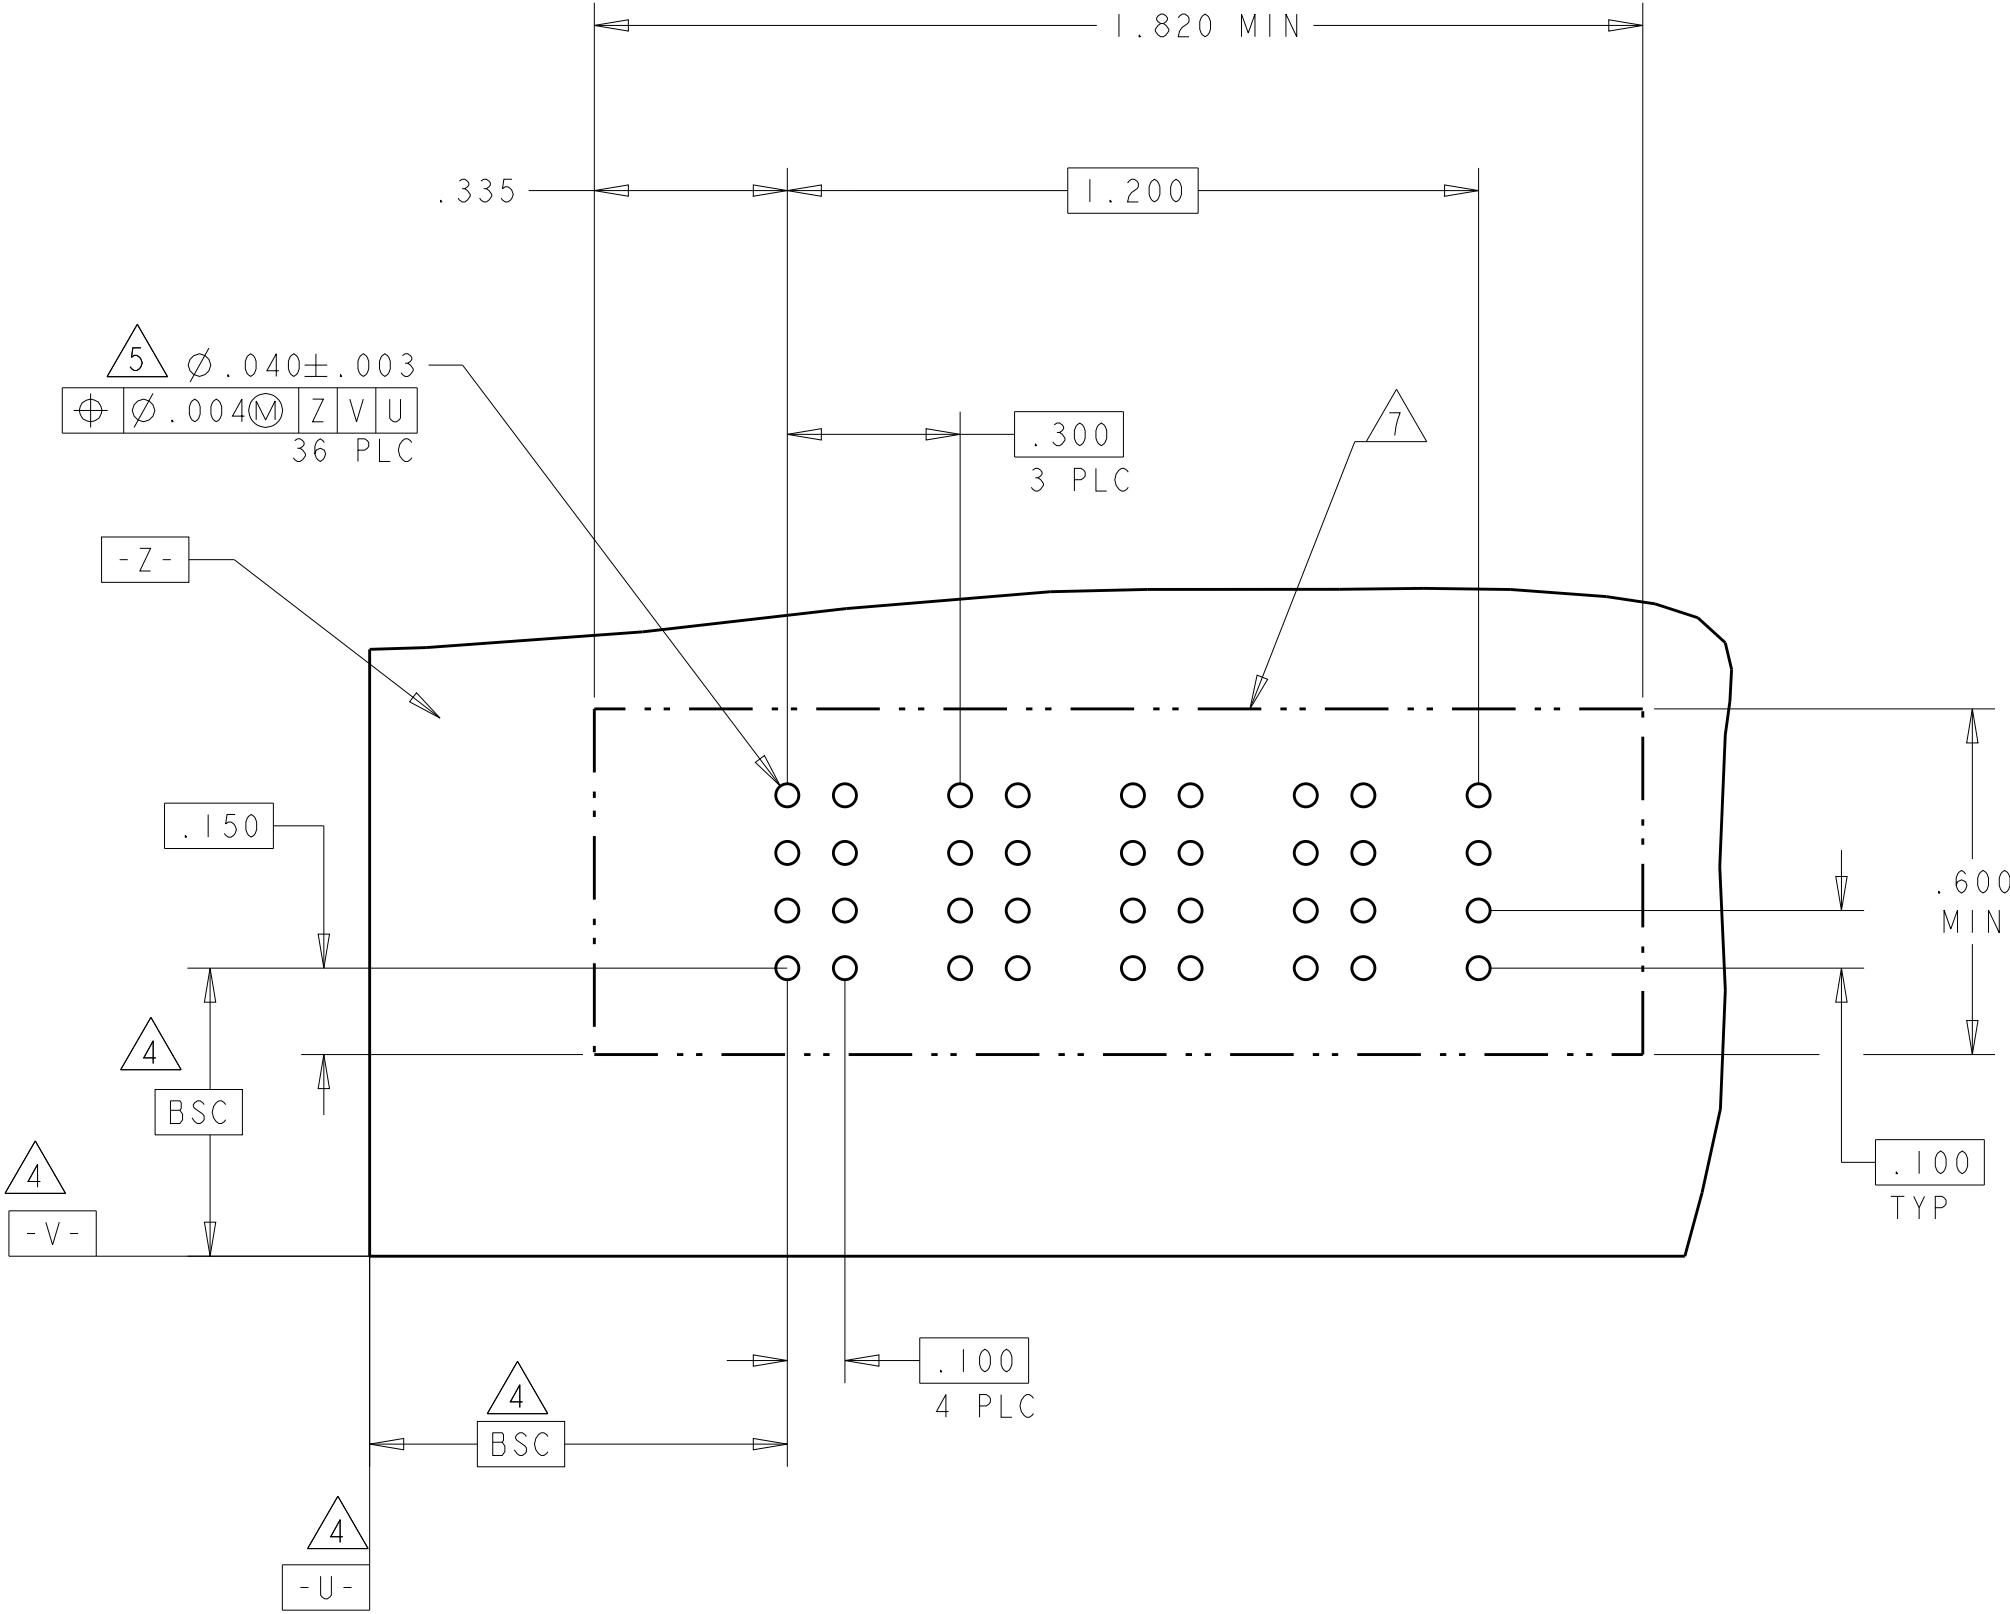

[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER				
			LP1	LP2	LP3	1	2	3	4	LP4	LP5	LP6	LP7	
2-6450820-5	D	 HD	 LZ	 LZ	 LZF					 LZ	 LZ	 LZ	 LZ	 HD
	EV EV EV ES													
	EV EV EV EV													
	EV EV EV EV													
	EV EV EV EV													
3LP + 16S + 4LP														

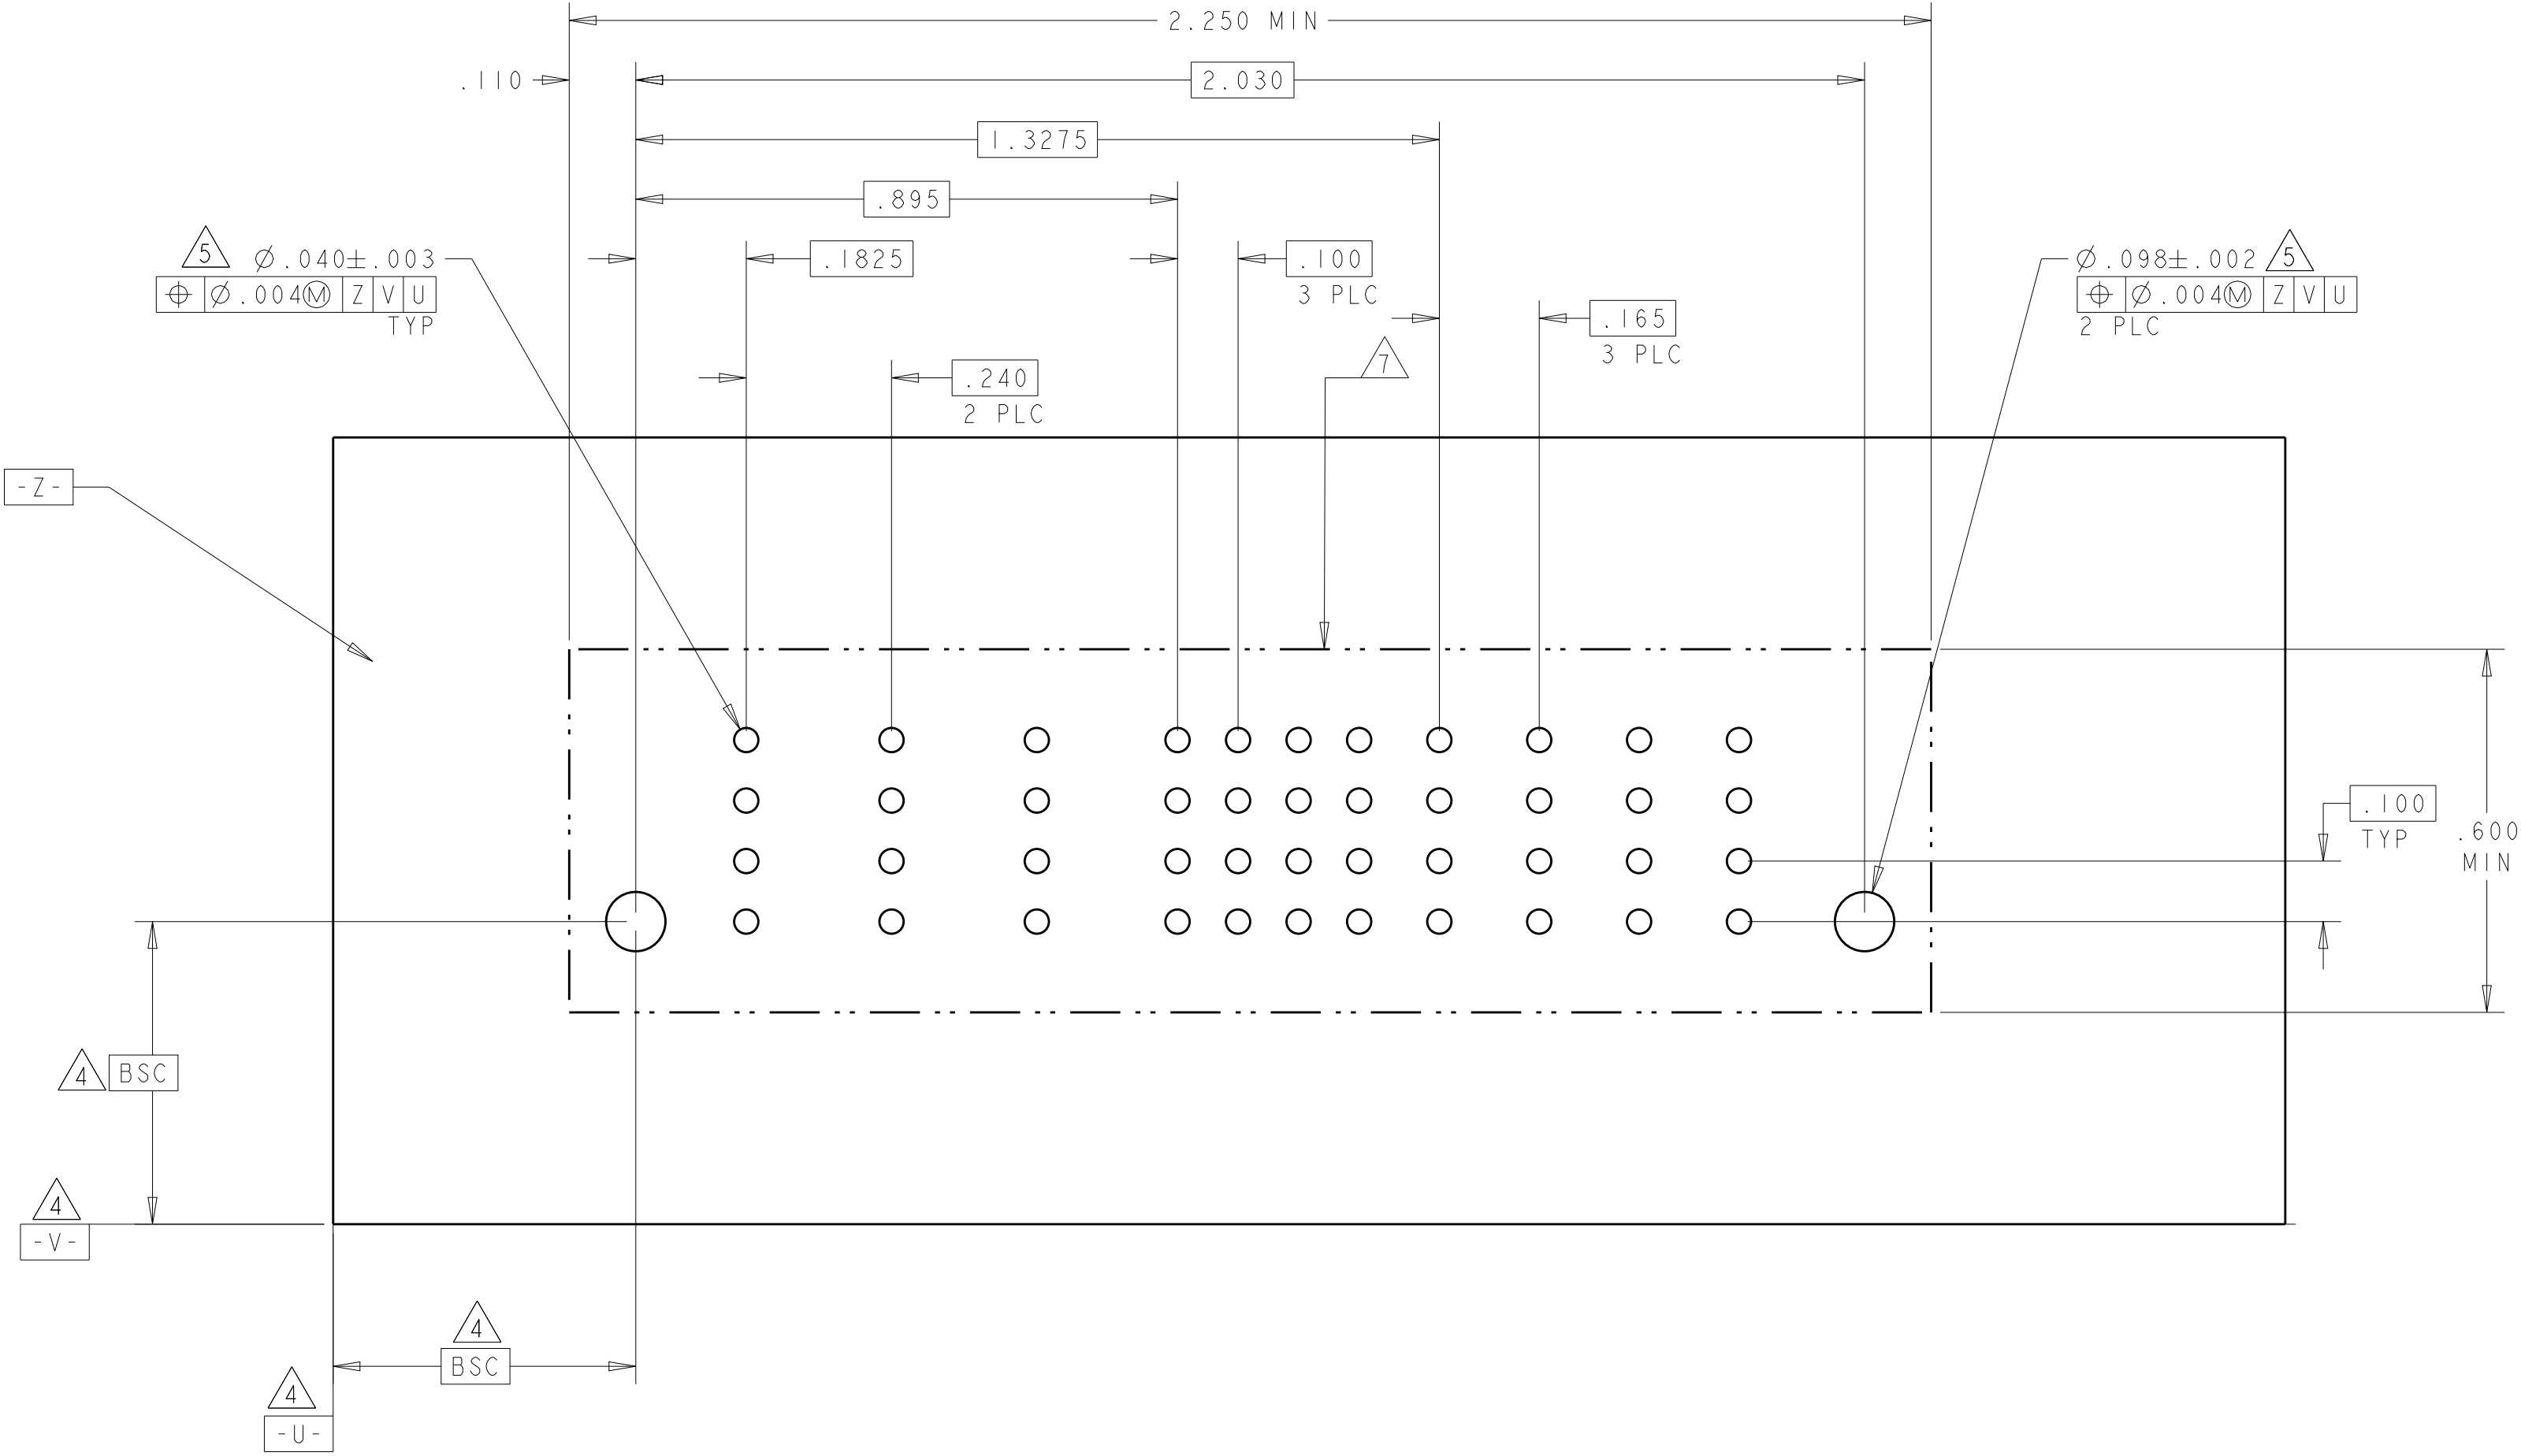

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

Customer Drawing

SCALE
-

SHEET
20

OF
20

REV
G8