

### 150HV Series Heavy Duty In-line Holder for 3AB/AG




#### Agency Approval

| Agency | Agency File Number |
|--------|--------------------|
|        | E14721             |

#### Notes:

Please refer to Fuseology section for information on proper fuseholder re-rating.  
Not for use in hazardous, and/or outdoor conditions.

#### 19" Loop of 14 AWG Stranded Cu Wire

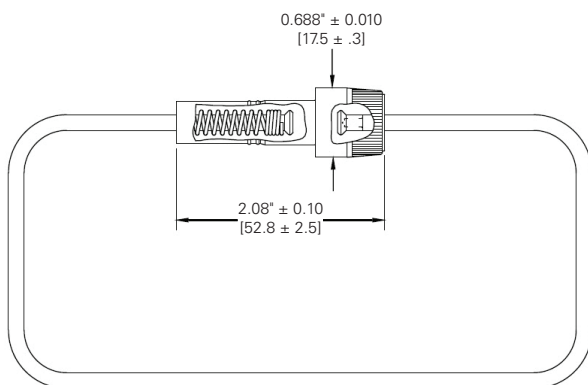

#### Product Characteristics

|                            |                                                                                                                 |
|----------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Compatible Fuses</b>    | 3AB/AG Fuses                                                                                                    |
| <b>Electrical</b>          | Intended for use at 600 VAC/DC max rated up to 20 amperes.                                                      |
| <b>Molded Parts</b>        | Body and knob are Black Thermoset (UL94 V-0). Both body and knob have a 0.20" diameter hole for insulated wire. |
| <b>Knob</b>                | Bayonet-lock type metal insert.                                                                                 |
| <b>Ambient Temperature</b> | -40°C to + 85°C                                                                                                 |
| <b>Contact Rivet</b>       | Brass. Tin plated                                                                                               |
| <b>Assembled</b>           | Supplied with 19" loop of #14 AWG red vinyl insulated wire                                                      |

#### Ordering Information

| Ordering Number | Catalog Number | Fuse Size | Packaging          |
|-----------------|----------------|-----------|--------------------|
| 01500603Z       | 150603         | ¼" x 1 ¼" | Bulk<br>100 Pieces |

#### Additional Information



Datasheet



Resources



Samples

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).