



Bandpass Filter

KR Series 2157




*Center Frequency can
be scaled to meet your
requirement*

Overall Amplitude

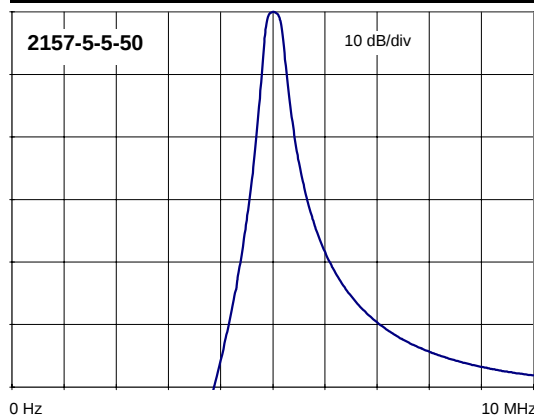

Overall Amplitude

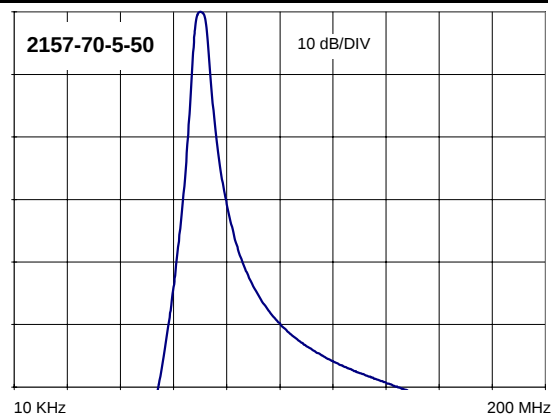


Specifications

KR Part Number	2157-5-5-50	2157-10.7-5-50	2157-21.4-5-50	2157-70-5-50
Filter Type	Bandpass	Bandpass	Bandpass	Bandpass
Center Frequency	5 MHz	10.7 MHz	21.4 MHz	70 MHz
3 dB Bandwidth (min)	5%	5%	5%	5%
40 dB Bandwidth	2 MHz	4.28 MHz	8.56 MHz	28 MHz
Impedance	50 Ω	50 Ω	50 Ω	50 Ω


Customized

To Specify Your Own Filter

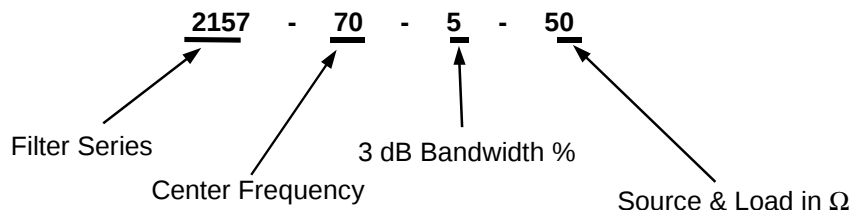

3 dB Bandwidth is expressed as a percentage of the center frequency.
Not all combinations of Center Frequency, Bandwidth and Impedance are allowed.

Outline Drawing

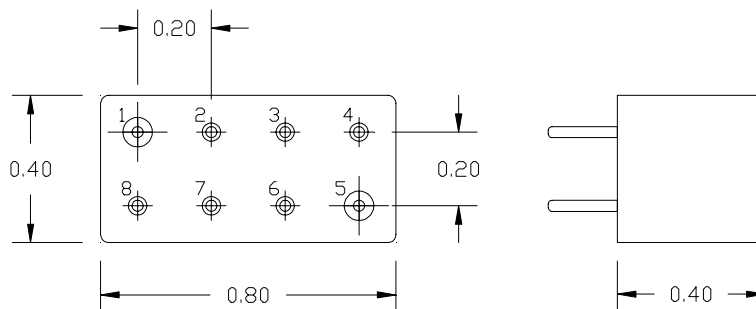

Metal Case
Pin 1 is Input Pin 5 is Output
All other Pins are Ground
All leads .030" diameter
Dimensions inches

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900