


Highpass Filter

**KR Model
2290-35**


Passband Amplitude & Group Delay

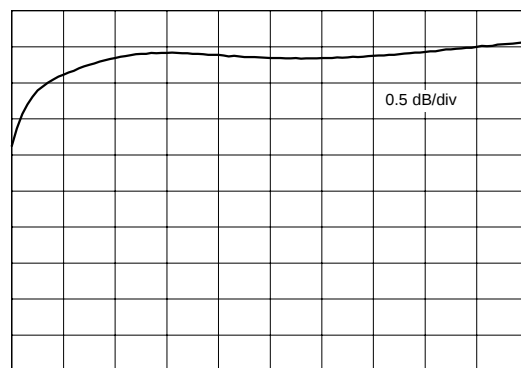

35 MHz

100 MHz

Overall Amplitude

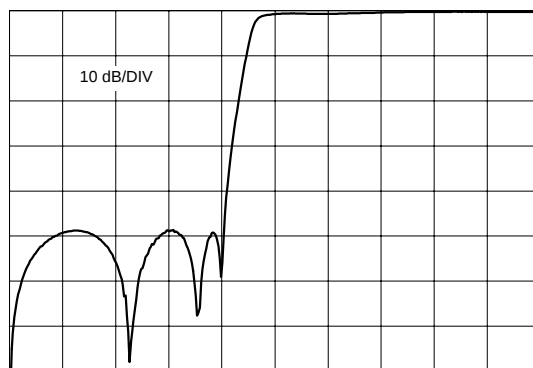


100 KHz

75 MHz

Specifications

KR Part Number	2290-35
Filter Type	Highpass
Insertion Loss	< 1 dB
End of Stopband >45 dB	30.3 MHz
Start of Passband < 4 dB	35 MHz
Source and Load Impedance	50 Ω

Outline Drawing

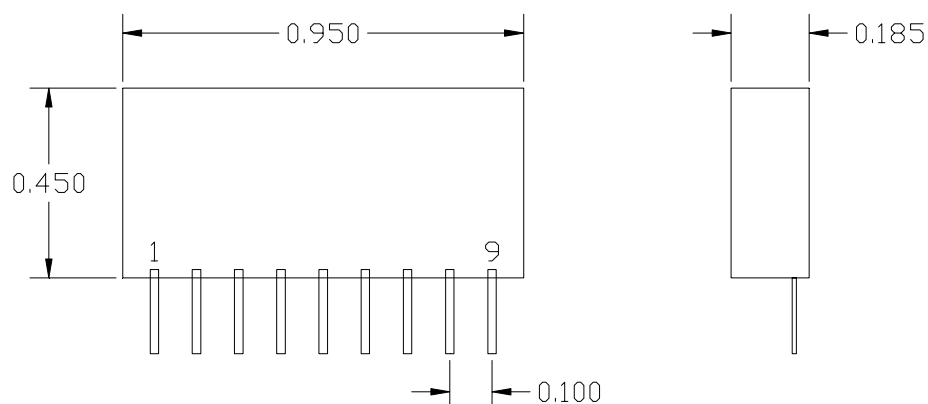

PIN 1 - INPUT
PIN 9 - OUTPUT
PIN 2 THRU 8 - GROUND
UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900