KR 2484 Lowpass Filter


General Description

KR 2484 is an 20 KHz lowpass filter. Other frequencies can be specified.

Features
- 20 KHz cutoff frequency
- 50 Ω

Typical Measured Performance

Overall Response & Return Loss
(5 dB/div)

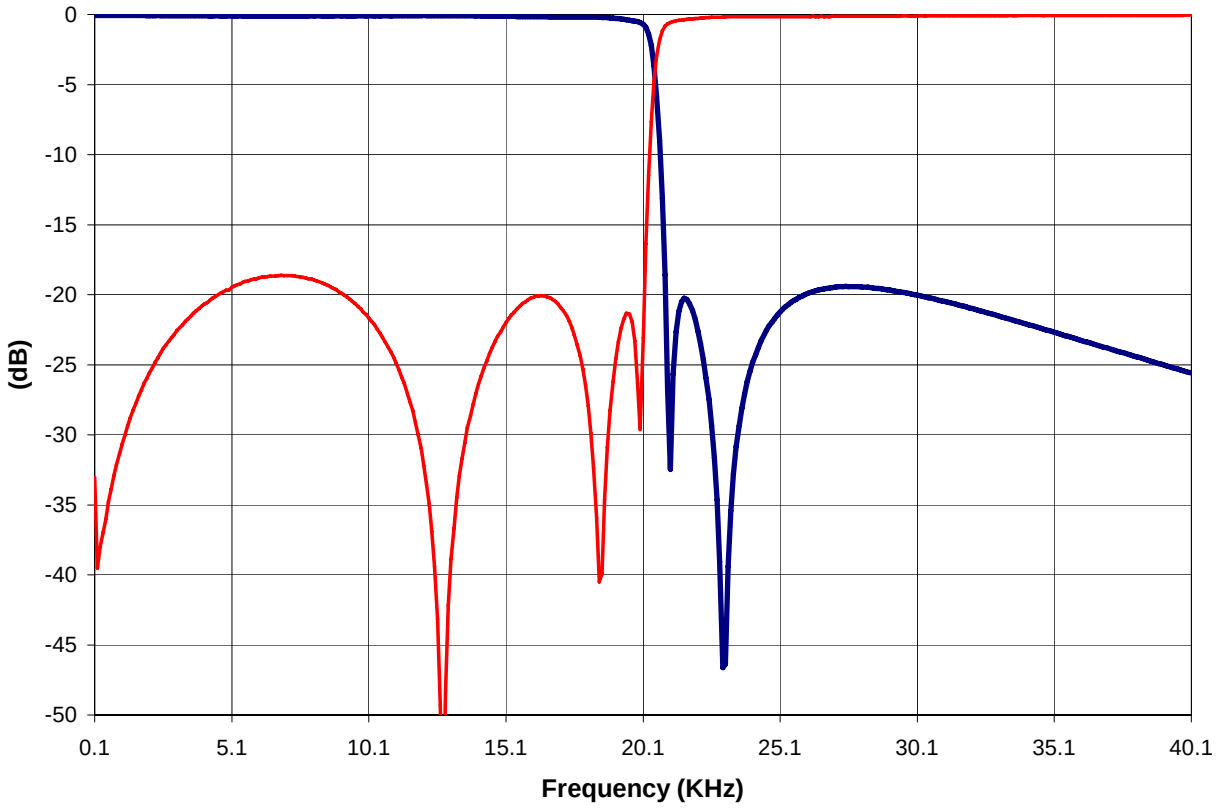

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*


© 2003, KR Electronics, Inc.

KR 2484 Lowpass Filter

Specifications

Parameter	Specification	Typical
Filter type	Lowpass	
Insertion Loss	< 1 dB	< .1 dB
Cutoff Frequency	20 KHz	
Attenuation at 20 KHz	< 1.5 dB	0.6 dB
Attenuation at 21 KHz	> 12 dB	26 dB
Source and Load	50 Ω	Consult Factory for other

Physical Dimensions

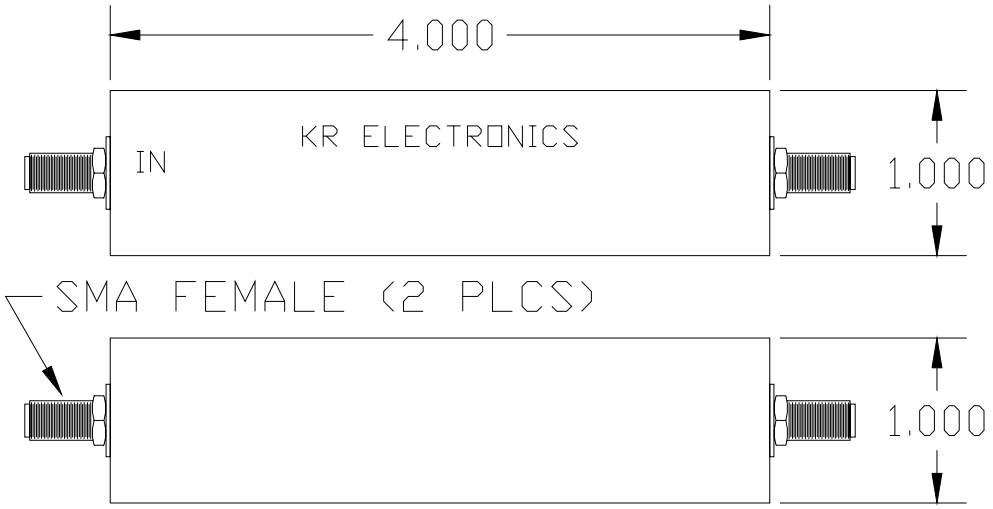

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2003, KR Electronics, Inc.