KR 2497 Notch Filter

General Description


KR 2497 is a 2 MHz notch filter. Please consult the factory for other frequencies.

Features

- Notch filter
- 2 MHz
- 50 Ω
- BNC connectors

Typical Performance

Overall Response
(10 dB/div)

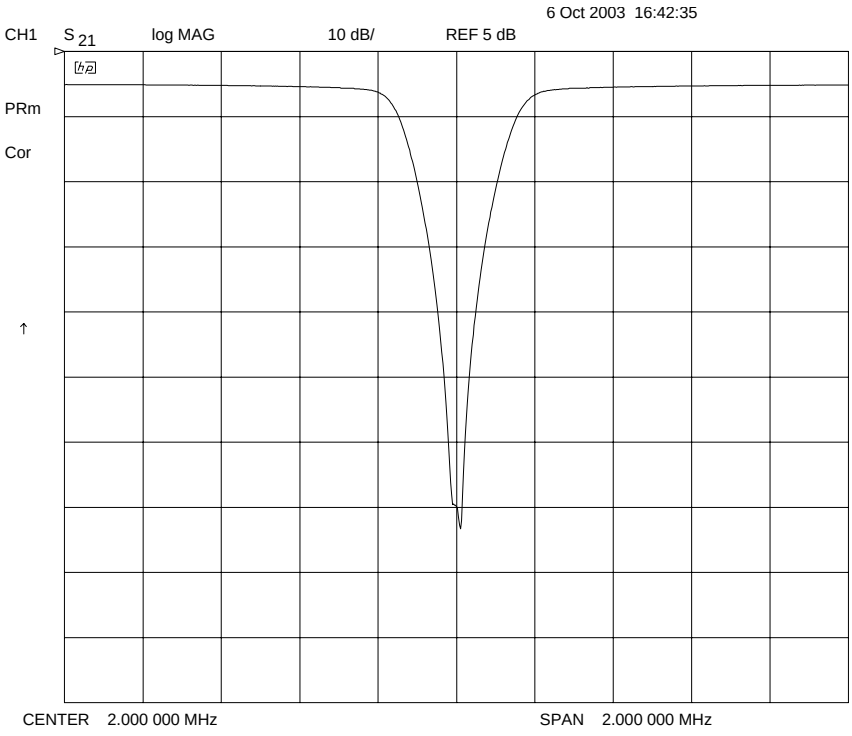

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*


© 2003, KR Electronics, Inc.

KR 2497

Specifications

Parameter	Specification
Filter type	Notch
Attenuation at 1.81 MHz	< 3 dB
Attenuation at 1.946 MHz	> 20 dB
Attenuation at 1.9706 to 2.0298 MHz	> 40 dB
Attenuation at 2.056 MHz	> 20 dB
Attenuation at 2.21 MHz	< 3 dB
Source & Load	50 Ω

Physical Dimensions

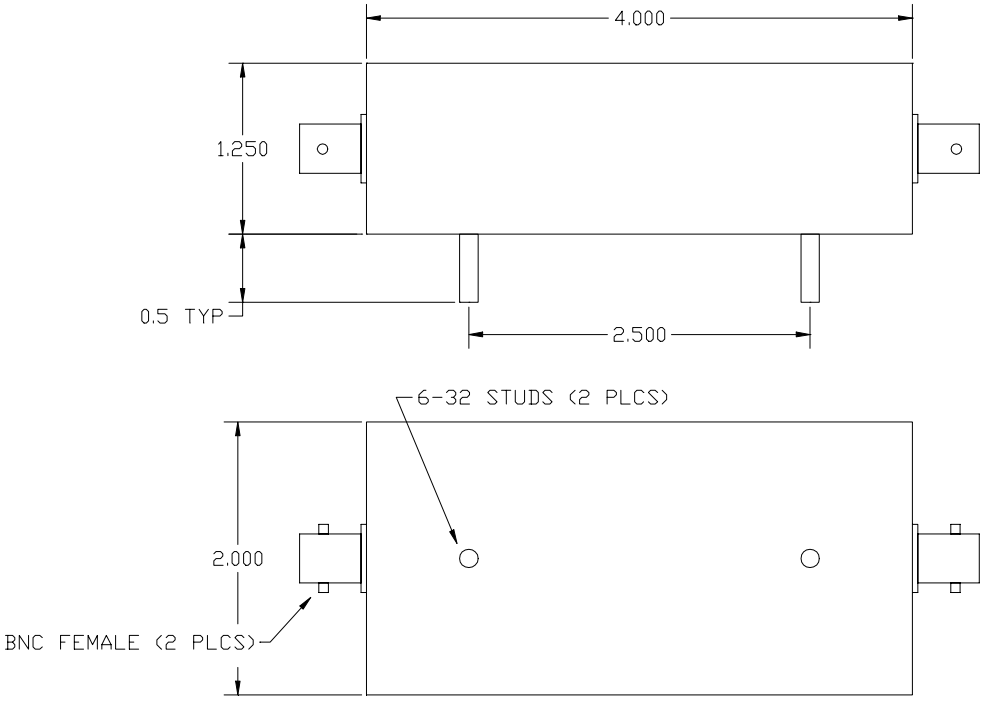

Dimensions in inches

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2003, KR Electronics, Inc.