

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

ATLANTIC VERSION
TERMINATOR
INTERFACE ADAPTER

PART
NUMBER

REVISION

DESCRIPTION

FEED TYPE

CONVERT TO

PART NUMBERS REQUIRED

2151102-1

C

FINE CRIMP HEIGHT ADJUST

MECHANICAL

PNEUMATIC FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119950-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151102-5

8-2151102-4

2119641-1

1901094-3

-

2119799-1

-

-

2063440-1

2168400-6 (QUANTITY 2)

-

2151102-2

C

FINE CRIMP HEIGHT ADJUST

PNEUMATIC

MECHANICAL FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119949-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151102-5

8-2151102-4

2119653-1

1901094-3

-

-

-

-

-

-

-

-

-

-

2151102-5

C

FINE CRIMP HEIGHT ADJUST

SERVO
LATCH PLATE⁴

MECHANICAL FEED

PNEUMATIC FEED

2119949-1

2119950-1

1338685-1

1338685-1

5-18022-5

5-18022-5

2119653-1

2119641-1

-

2119799-1

-

2063440-1

2151102-6

C

NON-CRIMP HEIGHT ADJUST

SERVO
LATCH PLATE⁴¹²

-

-

-

-

-

-

-

-

-

-

2151102-7

C

FINE CRIMP HEIGHT ADJUST

NONE

-

-

-

-

-

-

-

-

-

-

7-2151102-7

C

CRIMP TOOLING KIT

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.16 mm [.046]

F

INSUL

1.50 mm [.059]

F

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: AMP CT CONN 2mm PITCH TYPE II REC,CONTACT

WIRE STRIP LENGTH

INSULATION DIAMETER RANGE

1.90-2.30 [.075-.090 IN]

Ø0.93-1.50 mm [.037-.059 IN]

TERMINAL APPLICATION SPECIFICATION

114-5179

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

179227-1

179227-2

179227-3

179227-4

WIRE SIZE

CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING⁹

22 AWG OR 0.37mm2

0.83+/-0.05 [.033+/- .002]

8.4

0.30mm2

0.83+/-0.05 [.033+/- .002]

8.4

24 AWG OR 0.22mm2

0.77+/-0.05 [.030+/- .002]

9.0

26 AWG OR 0.12mm2

0.71+/-0.05 [.028+/- .002]

9.6

RECOMMENDED SPARE PARTS

GREASE BEARING SURFACES LIGHTLY

3.

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151102-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151102-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151102-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151102-6

5.

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 37.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.

8

MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE TERMINAL WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

AMP 4805 REV 31MAR2000

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

SET UP GAUGE
2119599-1

LOC
A

DIST
66

REVISIONS

P

LTR

DESCRIPTION

DATE

OWN

APVD

C

ECR-15-006502

24APR2015

MR

JDG

7

-

-

1

-

-

-

2119957-2

APPLICATOR SHIM PACK

260

-

1

-

1

1

1

8-21084-0

O-RING, .676 ID, .070 DIA. MAT.

252

-

-

-

-

1

-

2119640-1

PUSH ROD, AIR FEED

250

-

-

-

-

1

-

2079988-1

BUSHING, LCH5-12, MISUMI

249

-

-

-

-

1

-

2119641-1

FEED CAM, AIR FEED

248

-

1

-

1

1

1

2119798-1

DETENT PIN

247

-

1

-

1

1

1

1-22279-3

SPRING, COMPRESSION

246

-

-

1

-

-

-

2119758-1

RAM, AMP STYLE, SIDE FEED, NON-ADJ.

245

-

1

1

1

1

1

2119082-9

CAM, SNAIL, INSULATION ADJUSTMENT

244

-

1

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

-

1

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

-

1

1

1

1

1

7-18023-7

SCR, SKT HD CAP M3 X 4.0

241

-

-

2

2

-

-

2168400-6

SHCS, LOW HEAD, RoHS, M5 X 16

240

-

-

-

-

-

1

2119580-1

MECHANICAL FEED ASSEMBLY

239

-

-

-

-

1

-

2063440-1

AIR FEED MODULE

238

-

-

1

1

-

-

2119740-2

TAG,IDENTIFICATION

213

-

-

1

1

-

-

1901094-3

SPACER, FEEDER

198

-

1

1

1

1

1

9931111-1

PIN, SLOTTED SPRING 3.0 X 20.0

177

-

-

-

-

2

-

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

-

1

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

-

REF

REF

REF

REF

REF

994970-2

COUNTER, MAGNETIC

164

-

-

-

-

1

-

240638-1

SPRING, FEED FINGER

163

-

-

-

-

1

-

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

-

-

-

-

1

-

2119799-1

HOLDER,FEED FINGER, AF

136

-

-

REF

REF

-

-

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

-

-

1

1

-

-

1633743-1

SERVO FEED LATCH ASM

133

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

119

-

-

REF

REF

-

-

2119944-1

FEED FINGER ASSEMBLY,SF

117

-

1

1

1

1

1

1-455888-6

SPACER, CRIMPER

82

-

1

1

1

1

1

2119956-1

DOCUMENTATION PACKAGE

71

-

1

1

1

1

1

2119791-5

DEPRESSOR, WIRE

70

-

1

-

-

1

1

2119740-1

TAG,IDENTIFICATION

67

-

2

2

2

2

2

2168078-1

SCREW, DRIVE, RH, RoHS, 2 x .188

66

-

1

-

1

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

-

3

-

3

3

3

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

-

1

1

1

1

1

2079383-4

SCR, BHSC, RoHS (M4 X 8)

60

-

-

-

-

1

1

5-18022-5

SCR, HEX HD CAP, M4 X 6.0

59

-

-

-

-

1

1

1338685-1

PAWL, FEED

56

-

2

2

2

2

2

2168400-1

SHCS, LOW HEAD, RoHS, M4 X 12

54

-

2

2

2

2

2

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

53

-

-

-

-

1

2

18023-9

SCR, SKT HD CAP M4 X 6.0

49

-

-

-

-

-

1

2119652-1

FEED CAM, PRE FEED

48

-

-

-

-

-

1

2119653-1

FEED CAM, POST FEED

47

-

1

1

1

1

1

2119656-9

APPLICATOR BASIC ASSEMBLY, SF

46

-

1

-

1

1

1

2119370-1

RAM, AMP STYLE, SIDE FEED

44

-

1

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

-

1

-

1

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

-

1

-

1

1

1

2119957-1

APPLICATOR SHIM PACK

39

-

1

1

1

1

1

2119644-1

RAM WASHER, PRECISION

38

-

1

1

1

1

1

2119085-1

FA HEAD, ATLANTIC STYLE

37

-

1

-

1

1

1

2119092-1

BOLT, ADJUSTMENT

35

-

2

2

2

2

2

2079383-5

SCR, BHSC, RoHS (M4 X 20)

33

-

1

1

1

1

1

2161328-1

HEX HEAD, FLANGED, M5 x 8mm LONG

32

-

1

1

1

1

1

1-1320908-0

SPACER, STRIP GUIDE

30

-

1

1

1

1

1

2119959-1

ASSEMBLY, STRIP GUIDE

29

-

1

1

1

1

1

1-455888-0

SPACER, CRIMPER

28

-

1

1

1

1

1

1320928-2

STRIP GUIDE

24

-

1

1

1

1

1

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

21

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

20

-

1

1

1

1

1

2119533-3

STRIPPER, SIDE FEED

19

-

1

1

1

1

1

4-690518-6

HOLD DOWN, TERMINAL

18

-

1

1

1

1

1

2119806-1

INSERT, SHEAR

13

-

1

1

1

1

1

3-22280-3

SPRING, COMPRESSION

12

-

1

1

1

1

1

1-356885-4

STOP, SHEAR

11

-

1

1

1

1

1

2119805-1

SHEAR HOLDER, FRONT

10

-

1

1

1

1

1

1803095-1

FLOATING SHEAR, FRONT

9

-

1

1

1

1

1

8-1333225-2

ANVIL, COMBINATION

8

-

1

1

1

1

1

2119757-8

DEPRESSOR, SHEAR

5

-

1

1

1

1

1

2-238011-0

BLOCK, CRIMPER SPACER

4

-

1

1

1

1

1

2-2119582-3

CRIMPER, INSULATION F PREMIUM

3

-

1

1

1

1

1

455888-3

SPACER, CRIMPER

2

-

1

1

1

1

1

9-1633664-2

CRIMPER, WIRE

1

-77

-7

-6

-5

-2

-1

PART NO

DESCRIPTION

ITEM NO

THIS IS SUBJECT TO CHANGE WITHOUT NOTICE AND WITHOUT LIABILITY TO THE CUSTOMER. THE CUSTOMER SHALL BE CONTACTED FOR THE LATEST REVISION.

DWN
C. CHEN
CHK
S. XI
APVD
J. CRUZ

25MAY2011
25MAY2011
25MAY2011

DIMENSIONS:
mm

0 PLC ±.5
1 PLC ±0.13
2 PLC ±0.13
3 PLC ±0.013
4 PLC ±0.0001
ANGLES ±.

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

FINISH

MATERIAL

FINISH

WEIGHT

Customer Accessible Production Drawing

NAME
Ocean Side Feed
Applicator

SIZE
A1

CAGE CODE
00779

DRAWING NO
©=2151102

RESTRICTED TO

SCALE
1:2

SHEET
1

OF
4


REV
C

TE Connectivity
Harrisburg, PA 17105-3608


SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
A	66	-	-	SEE SHEET 1	-	-

FEED TYPE
MECHANICAL

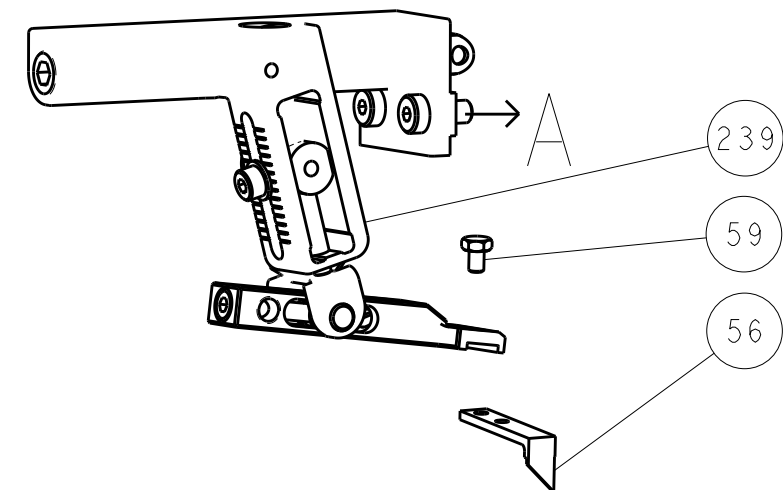




PNEUMATIC

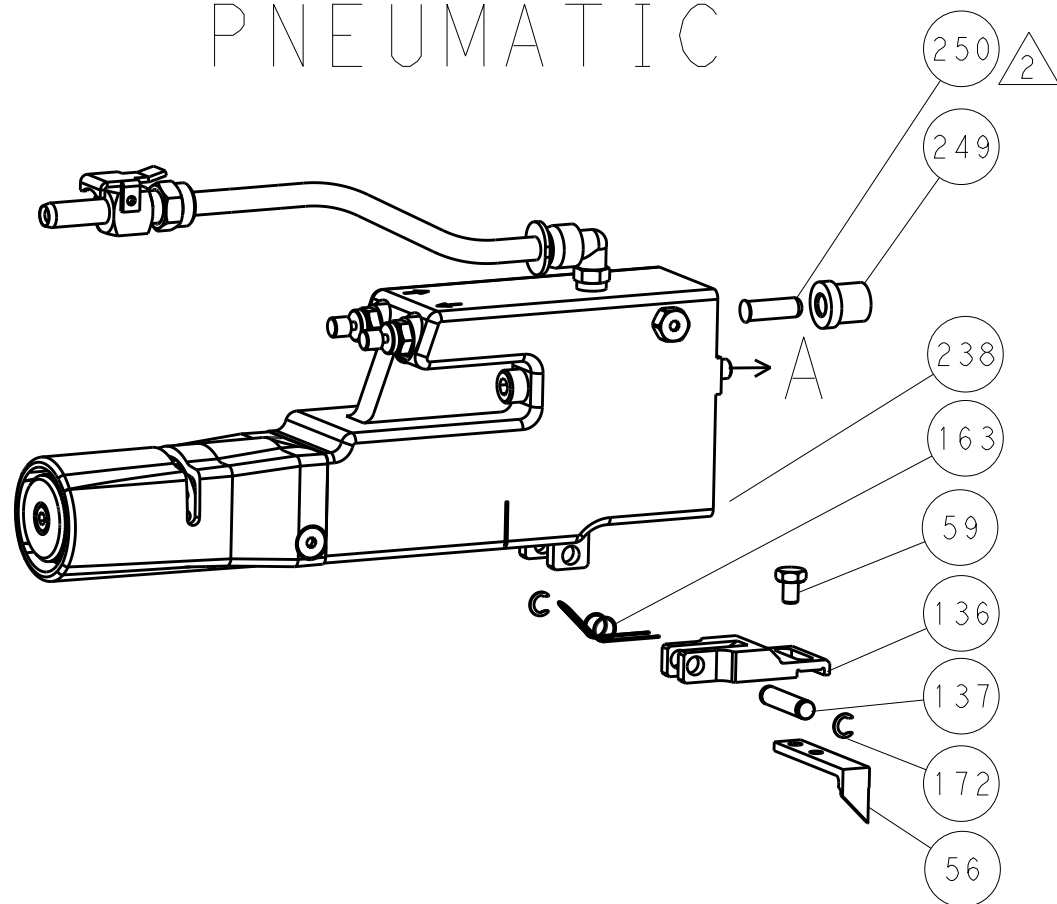

SERVO
LATCH PLATE




CAM POSITIONS

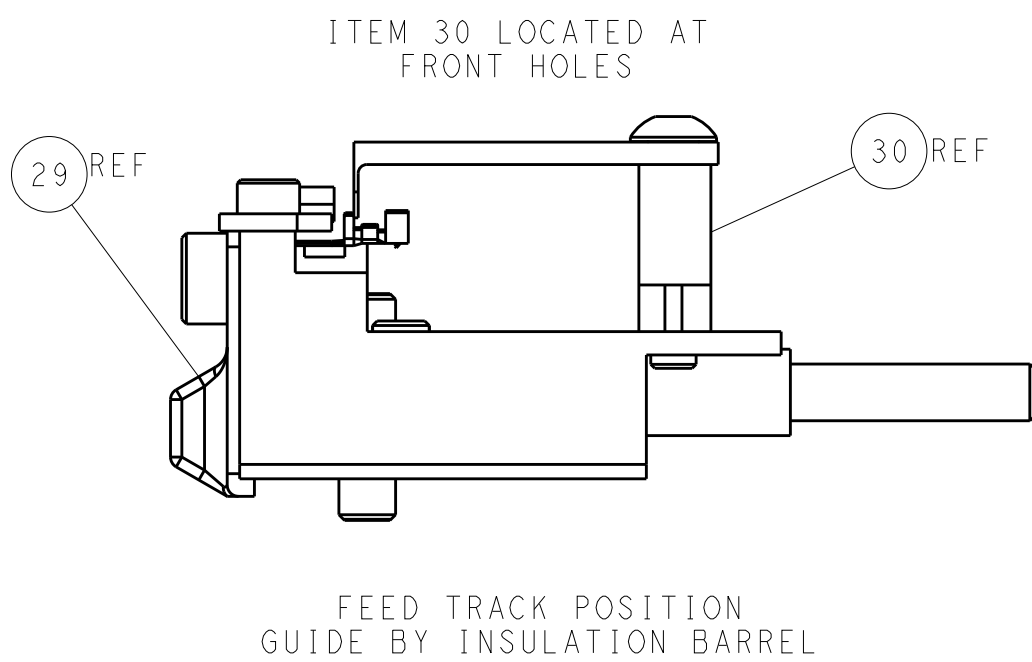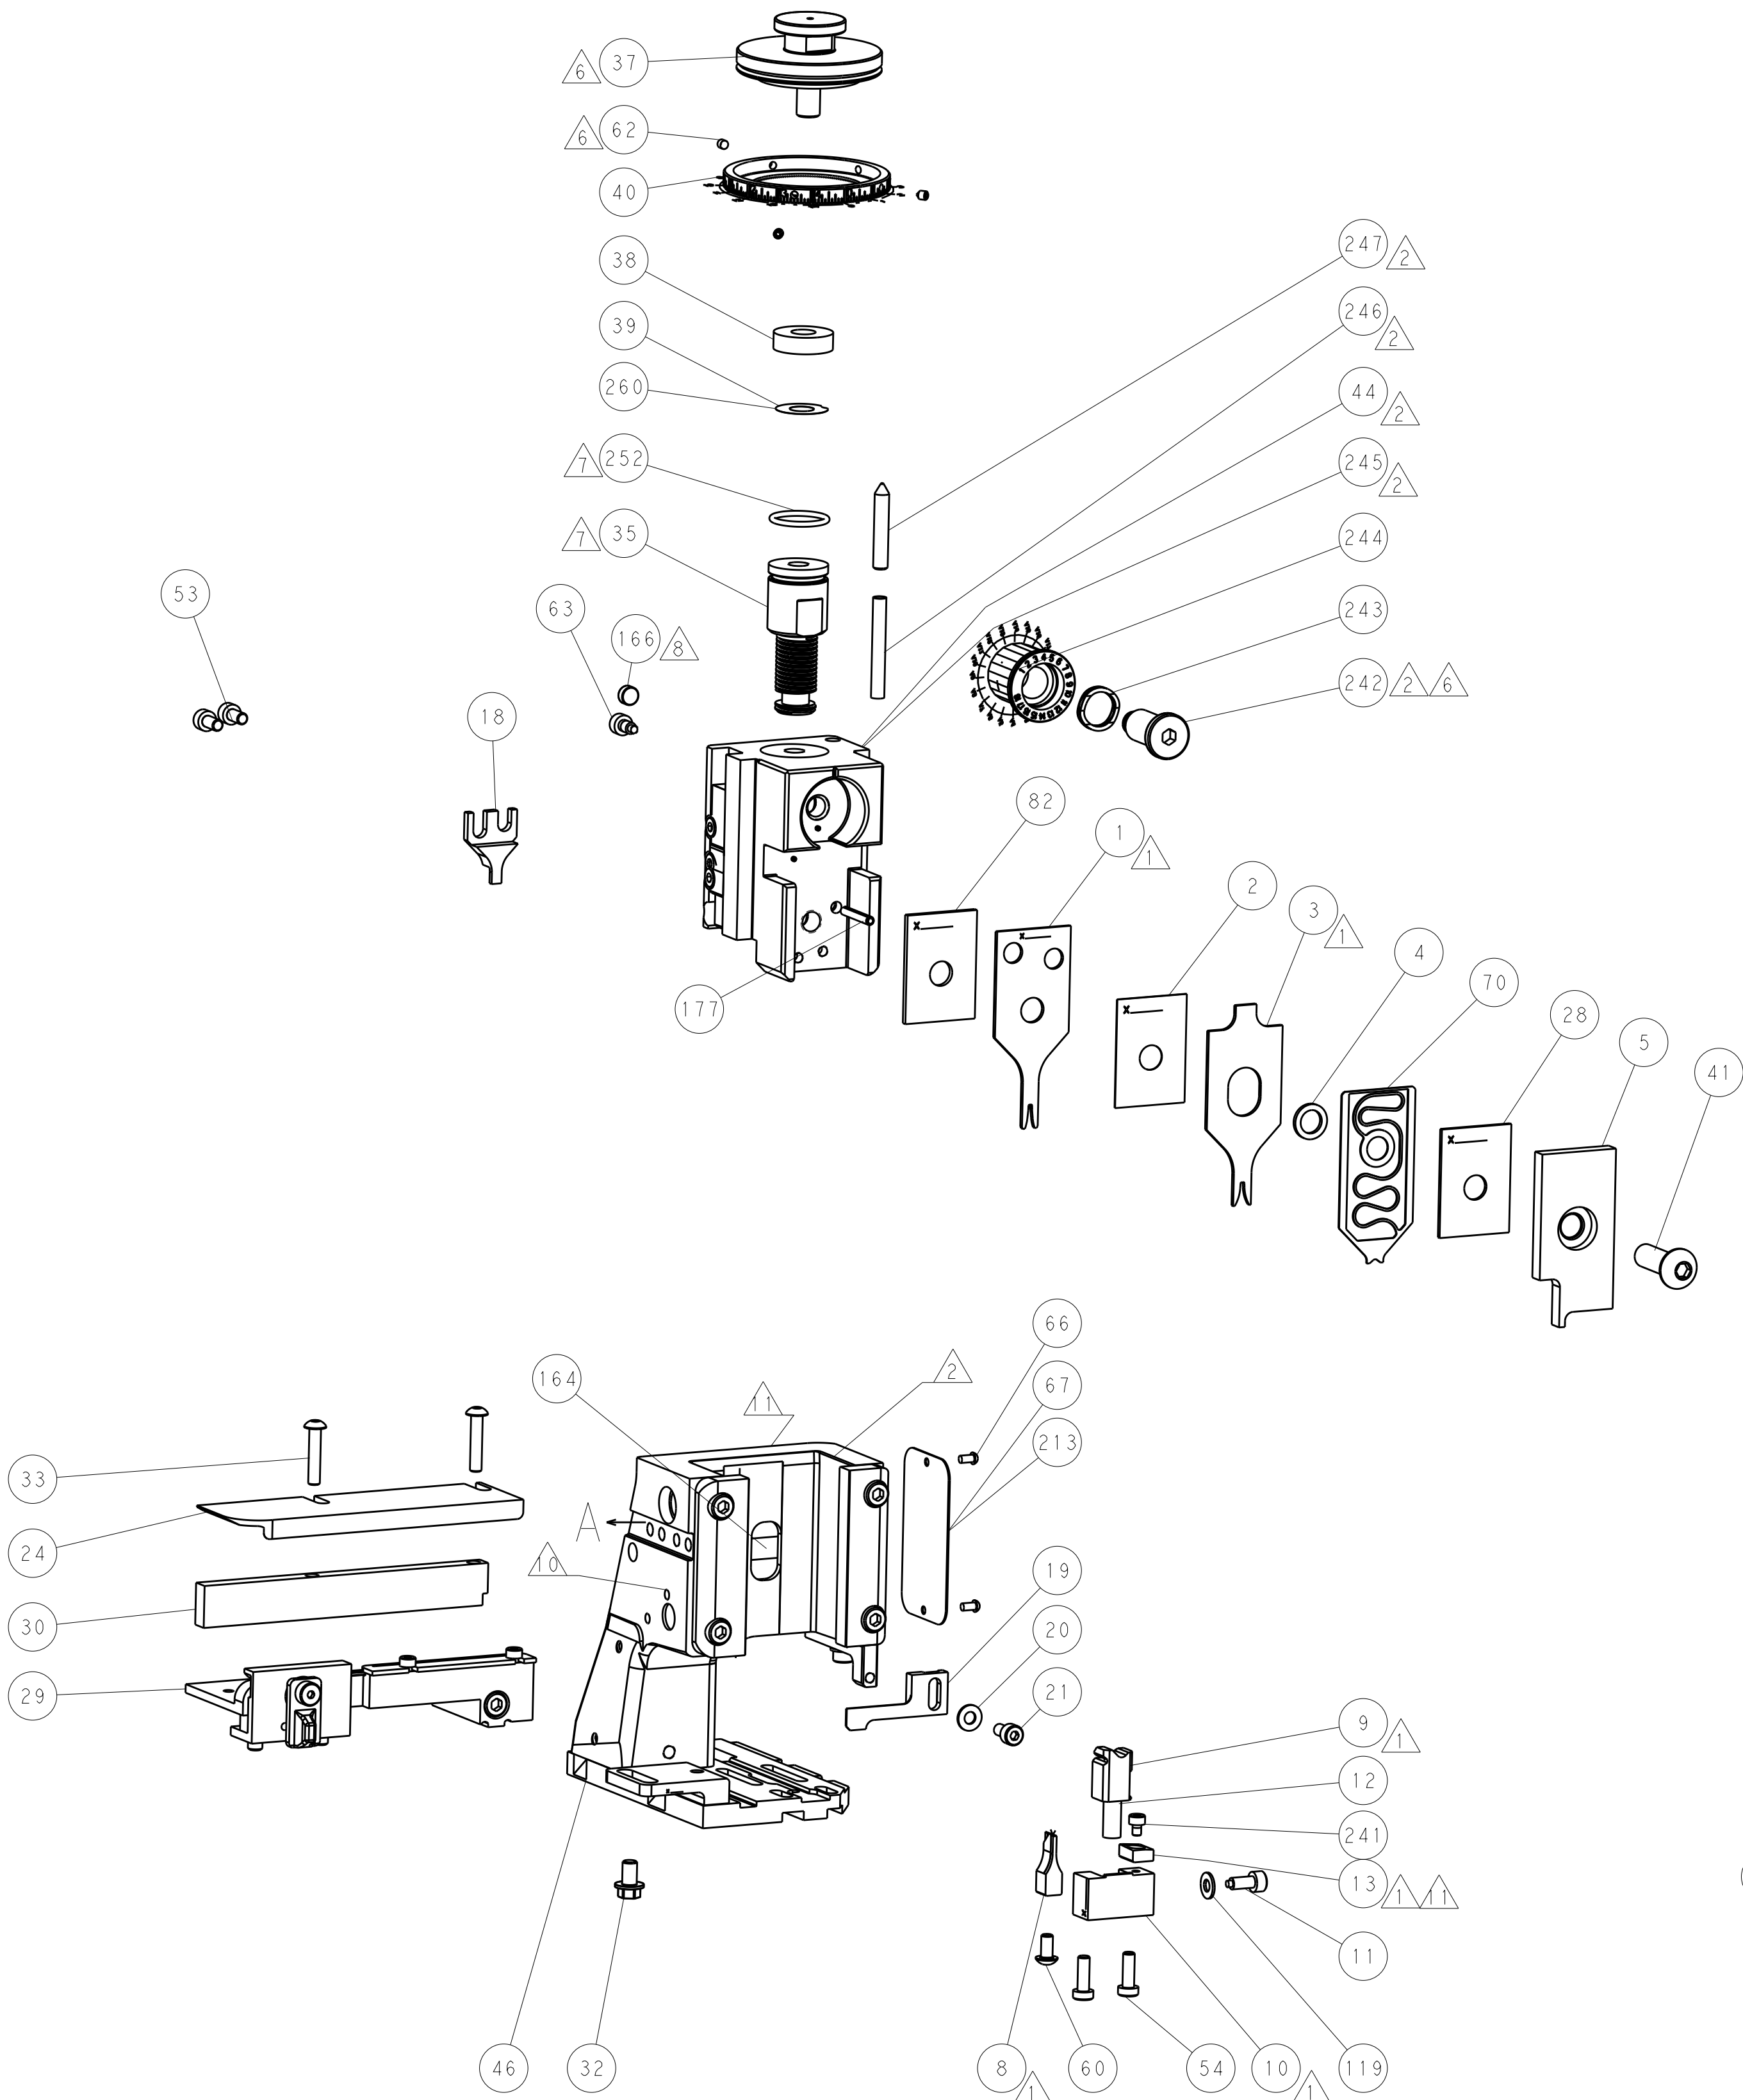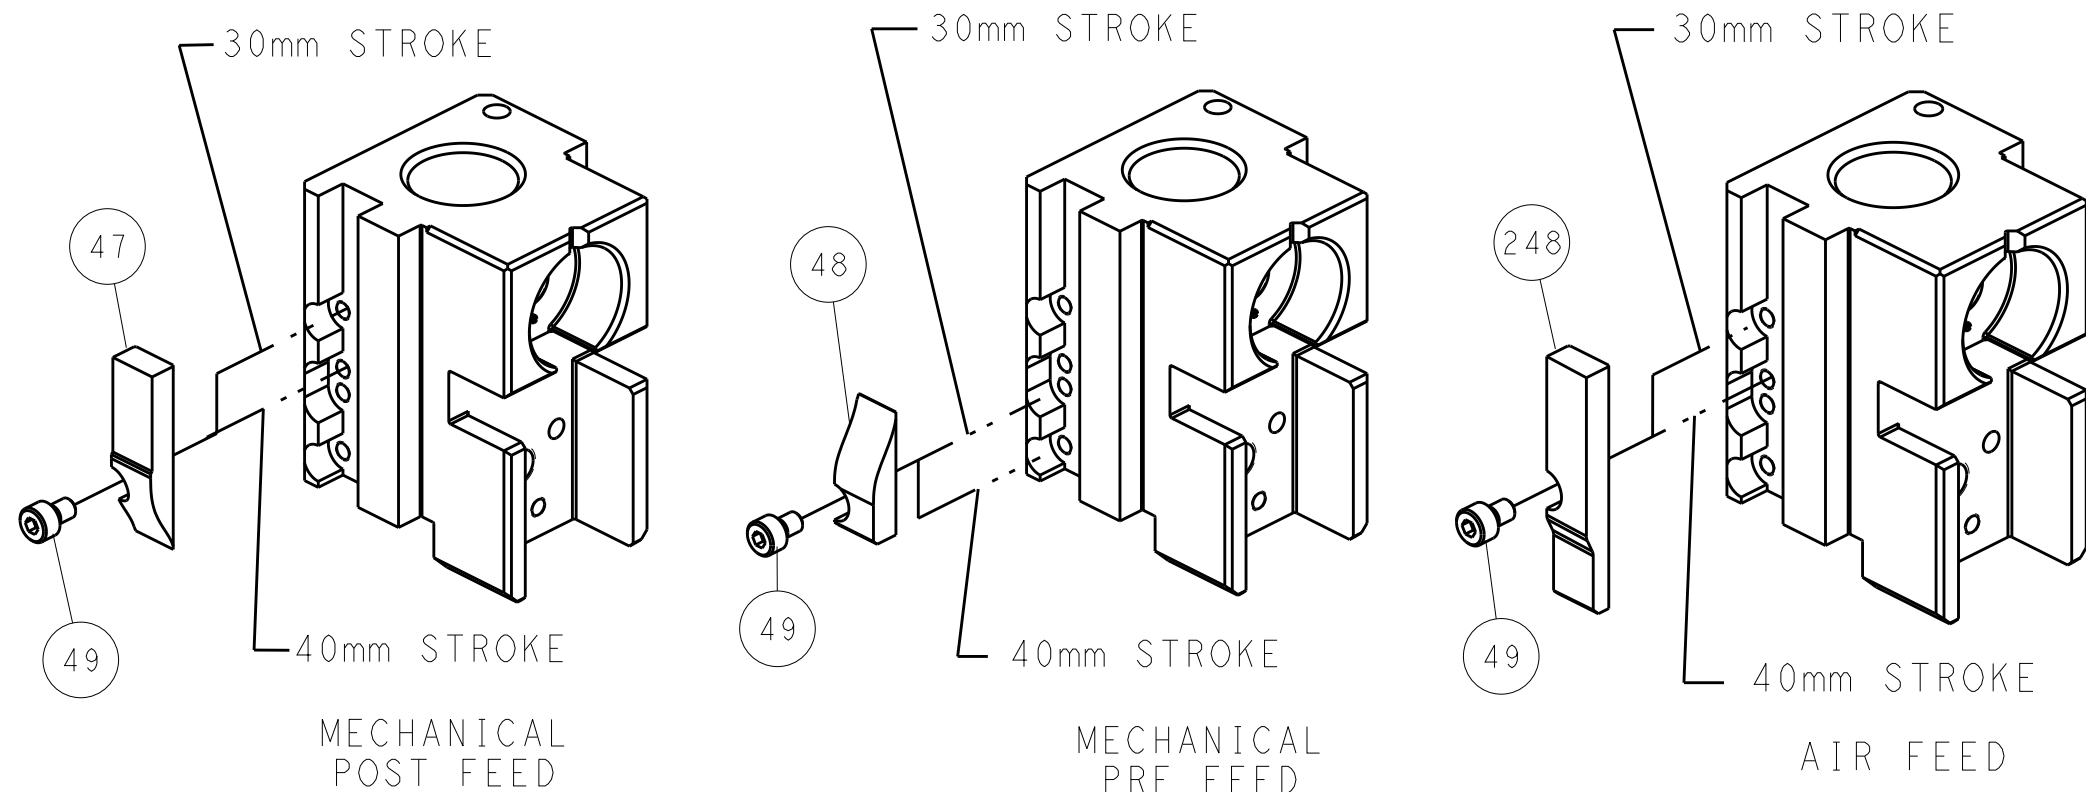

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN C. CHEN CHK S. XI APVD I. CRUZ		25MAY2011 25MAY2011 25MAY2011		TE Connectivity Harrisburg, PA 17105-3608	
0 PLC ±.5 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001		FINISH		PRODUCT SPEC		NAME		Ocean Side Feed Applicator	
MATERIAL		WEIGHT		APPLICATION SPEC		SIZE		RESTRICTED TO	
-		-		Customer Accessible Production Drawing		A1 00779 ©=2151102		-	
		SCALE		SHEET		REV			
		1:2		2		4			

PACIFIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART							
					CONVERT TO	PART NUMBERS REQUIRED						
	2-2151102-1	C	FINE CRIMP HEIGHT ADJUST	MECHANICAL	PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1	
					SERVO LATCH PLATE	2119951-1	-	8-2151102-5	1901094-3	-	2168400-6 (QUANTITY 2)	
					SMART APPLICATOR	2161326-1	-	8-2151102-4	-	-	-	
	2-2151102-2	C	FINE CRIMP HEIGHT ADJUST	PNEUMATIC	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-	
					SERVO LATCH PLATE	2119951-1	-	8-2151102-5	1901094-3	-	2168400-6 (QUANTITY 2)	
					SMART APPLICATOR	2161326-1	-	8-2151102-4	-	-	-	
	2-2151102-5	C	FINE CRIMP HEIGHT ADJUST	SERVO LATCH PLATE ⁴	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-	
					PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1	
	2-2151102-7	C	FINE CRIMP HEIGHT ADJUST	NONE	-	-	-	-	-	-	-	-
	7-2151102-7	C	CRIMP TOOLING KIT	-	-	-	-	-	-	-	-	-

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	1.16 mm [.046]	F
INSUL	1.50 mm [.059]	F
APPLICATOR INSTRUCTIONS 408-10389		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP CT CONN 2mm PITCH TYPE II REC.CONTACT			
WIRE STRIP LENGTH 1.90-2.30 [.075-.090 IN]			INSULATION DIAMETER RANGE Ø0.93-1.50 mm [.037-.059 IN]
TERMINAL APPLICATION SPECIFICATION 	114-5179	-	-
	-	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
179227-1	179227-2	179227-3	179227-4

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING ⁹
22 AWG OR 0.37mm2	0.83+/-0.05 [.033+/- .002]	8.4
0.30mm2	0.83+/-0.05 [.033+/- .002]	8.4
24 AWG OR 0.22mm2	0.77+/-0.05 [.030+/- .002]	9.0
26 AWG OR 0.12mm2	0.71+/-0.05 [.028+/- .002]	9.6




- ¹ RECOMMENDED SPARE PARTS
- ² GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- ⁴ APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151102-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151102-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151102-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- ⁶ APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
- ⁷ GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.
- ⁸ MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- ⁹ CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- ¹⁰ SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- ¹¹ TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

SET UP GAUGE 2119599-1	LOC A	DIS 66	REVISIONS					
			P	LTR	DESCRIPTION	DATE	OWN	APVD
			-	-	SEE SHEET 1	-	-	-

	-	1	1	1	1	2119782-1	FINE ADJUST HEAD ASM, PACIFIC STYLE	251
	-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
	-	-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249
	-	1	1	1	1	1-22279-3	SPRING, COMPRESSION	246
	-	1	1	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
	-	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
6	-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
	-	-	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
	-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
	-	-	-	1	-	2063440-1	AIR FEED MODULE	238
	-	-	1	-	-	2119740-2	TAG,IDENTIFICATION	213
	-	-	1	-	-	1901094-3	SPACER, FEEDER	198
	-	1	1	1	1	993111-1	PIN, SLOTTED SPRING 3.0 X 20.0	177
	-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
8	-	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166
	-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
	-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
7	-	1	1	1	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	152
	-	-	-	1	-	2119641-2	FEED CAM, AIR FEED	151
	-	1	1	1	1	2119798-2	DETENT PIN	145
	-	1	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144
	-	2	2	2	2	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	143
	-	-	-	-	1	2119653-2	FEED CAM, POST FEED	142
	-	1	1	1	1	1-2119656-0	APPLICATOR BASIC ASSEMBLY, SF	141
	-	1	1	1	1	2119650-1	RAM, ASIAN STYLE, SIDE FEED	140
7	-	1	1	1	1	2119092-2	BOLT, ADJUSTMENT	139
	-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 x .854	137
	-	-	-	1	-	2119799-1	HOLDER,FEED FINGER, AF	136
	-	-	REF	-	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
	-	-	1	-	-	1633743-1	SERVO FEED LATCH ASM	133
	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119
	-	-	REF	-	-	2119944-1	FEED FINGER ASSEMBLY,SF	117
	-	1	1	1	1	1-455888-6	SPACER, CRIMPER	82
	-	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71
	-	1	1	1	1	2119791-5	DEPRESSOR, WIRE	70
	-	1	-	1	1	2119740-1	TAG,IDENTIFICATION	67
	-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
	-	1	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
6	-	3	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
	-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
	-	-	-	1	1	1338685-1	PAWL, FEED	56
	-	2	2	2	2	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	53
	-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
	-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
	-	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
	-	1	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40
	-	1	1	1	1	2119957-1	APPLICATOR SHIM PACK	39
	-	1	1	1	1	2119644-1	RAM WASHER, PRECISION	38
	-	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
	-	1	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32
	-	1	1	1	1	1-1320908-0	SPACER, STRIP GUIDE	30
	-	1	1	1	1	2119959-1	ASSEMBLY, STRIP GUIDE	29
	-	1	1	1	1	1-455888-0	SPACER, CRIMPER	28
	-	1	1	1	1	1320928-2	STRIP GUIDE	24
	-	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21
	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20
	-	1	1	1	1	2119533-3	STRIPPER, SIDE FEED	19
	-	1	1	1	1	4-690518-6	HOLD DOWN, TERMINAL	18
1	-	1	1	1	1	2119806-1	INSERT, SHEAR	13
	-	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
	-	1	1	1	1	1-356885-4	STOP, SHEAR	11
1	-	1	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10
1	-	1	1	1	1	1803095-1	FLOATING SHEAR, FRONT	9
1	1	1	1	1	1	8-1333225-2	ANVIL, COMBINATION	8
	-	1	1	1	1	2119757-8	DEPRESSOR, SHEAR	5
	-	1	1	1	1	2-238011-0	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	1	2-2119582-3	CRIMPER, INSULATION F PREMIUM	3
	-	1	1	1	1	455888-3	SPACER, CRIMPER	2
1	1	1	1	1	1	9-1633664-2	CRIMPER, WIRE	1
	-77	-27	-25	-22	-21	PART NO	DESCRIPTION	ITEM NO

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND TO BE CONTROLLED BY THE ISSUING ORGANIZATION. IT IS SUBJECT TO CHANGE AND TO BE CONTROLLED BY THE ISSUING ORGANIZATION. IT IS SUBJECT TO CHANGE AND TO BE CONTROLLED BY THE ISSUING ORGANIZATION.				OWN C. CHEN CHK S. XI APVD J. CRUZ		25MAY2011 25MAY2011 25MAY2011	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		TE Connectivity Harrisburg, PA 17105-3608	
		0 PLC ±.5 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±.5		PRODUCT SPEC		Ocean Side Feed Applicator	
MATERIAL		FINISH		APPLICATION SPEC		SIZE CASE CODE DRAWING NO	
-		-		WEIGHT		A1 00779 ©=2151102	
Customer Accessible Production Drawing				SCALE 1:2		SHEET 3 OF 4	
						REV C	

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
A	66	-	-	SEE SHEET 1	-

D

C

B

A


D

C


B

A

FEED TYPE MECHANICAL

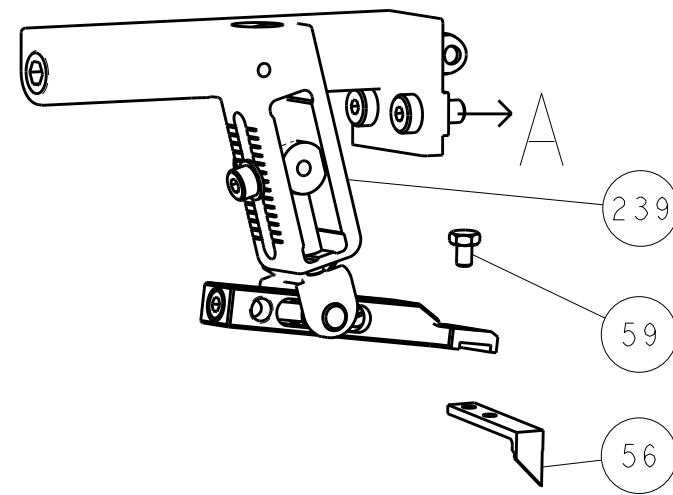


PNEUMATIC

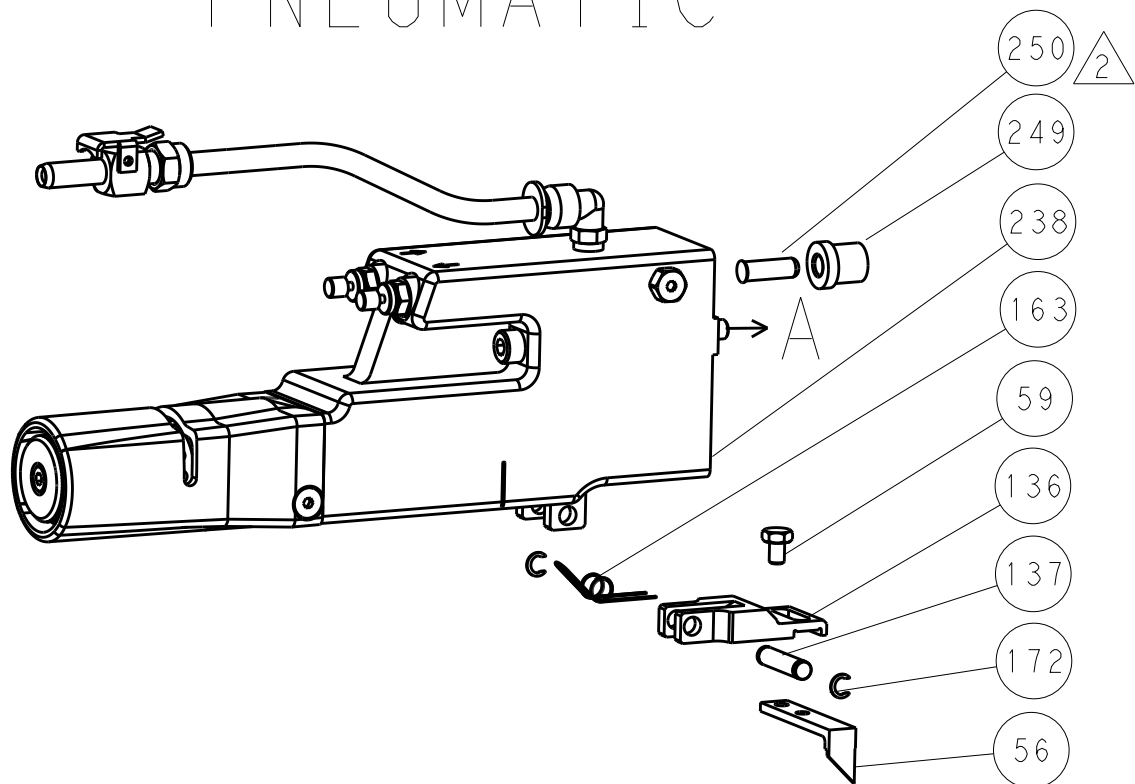


SERVO LATCH PLATE



CAM POSITIONS

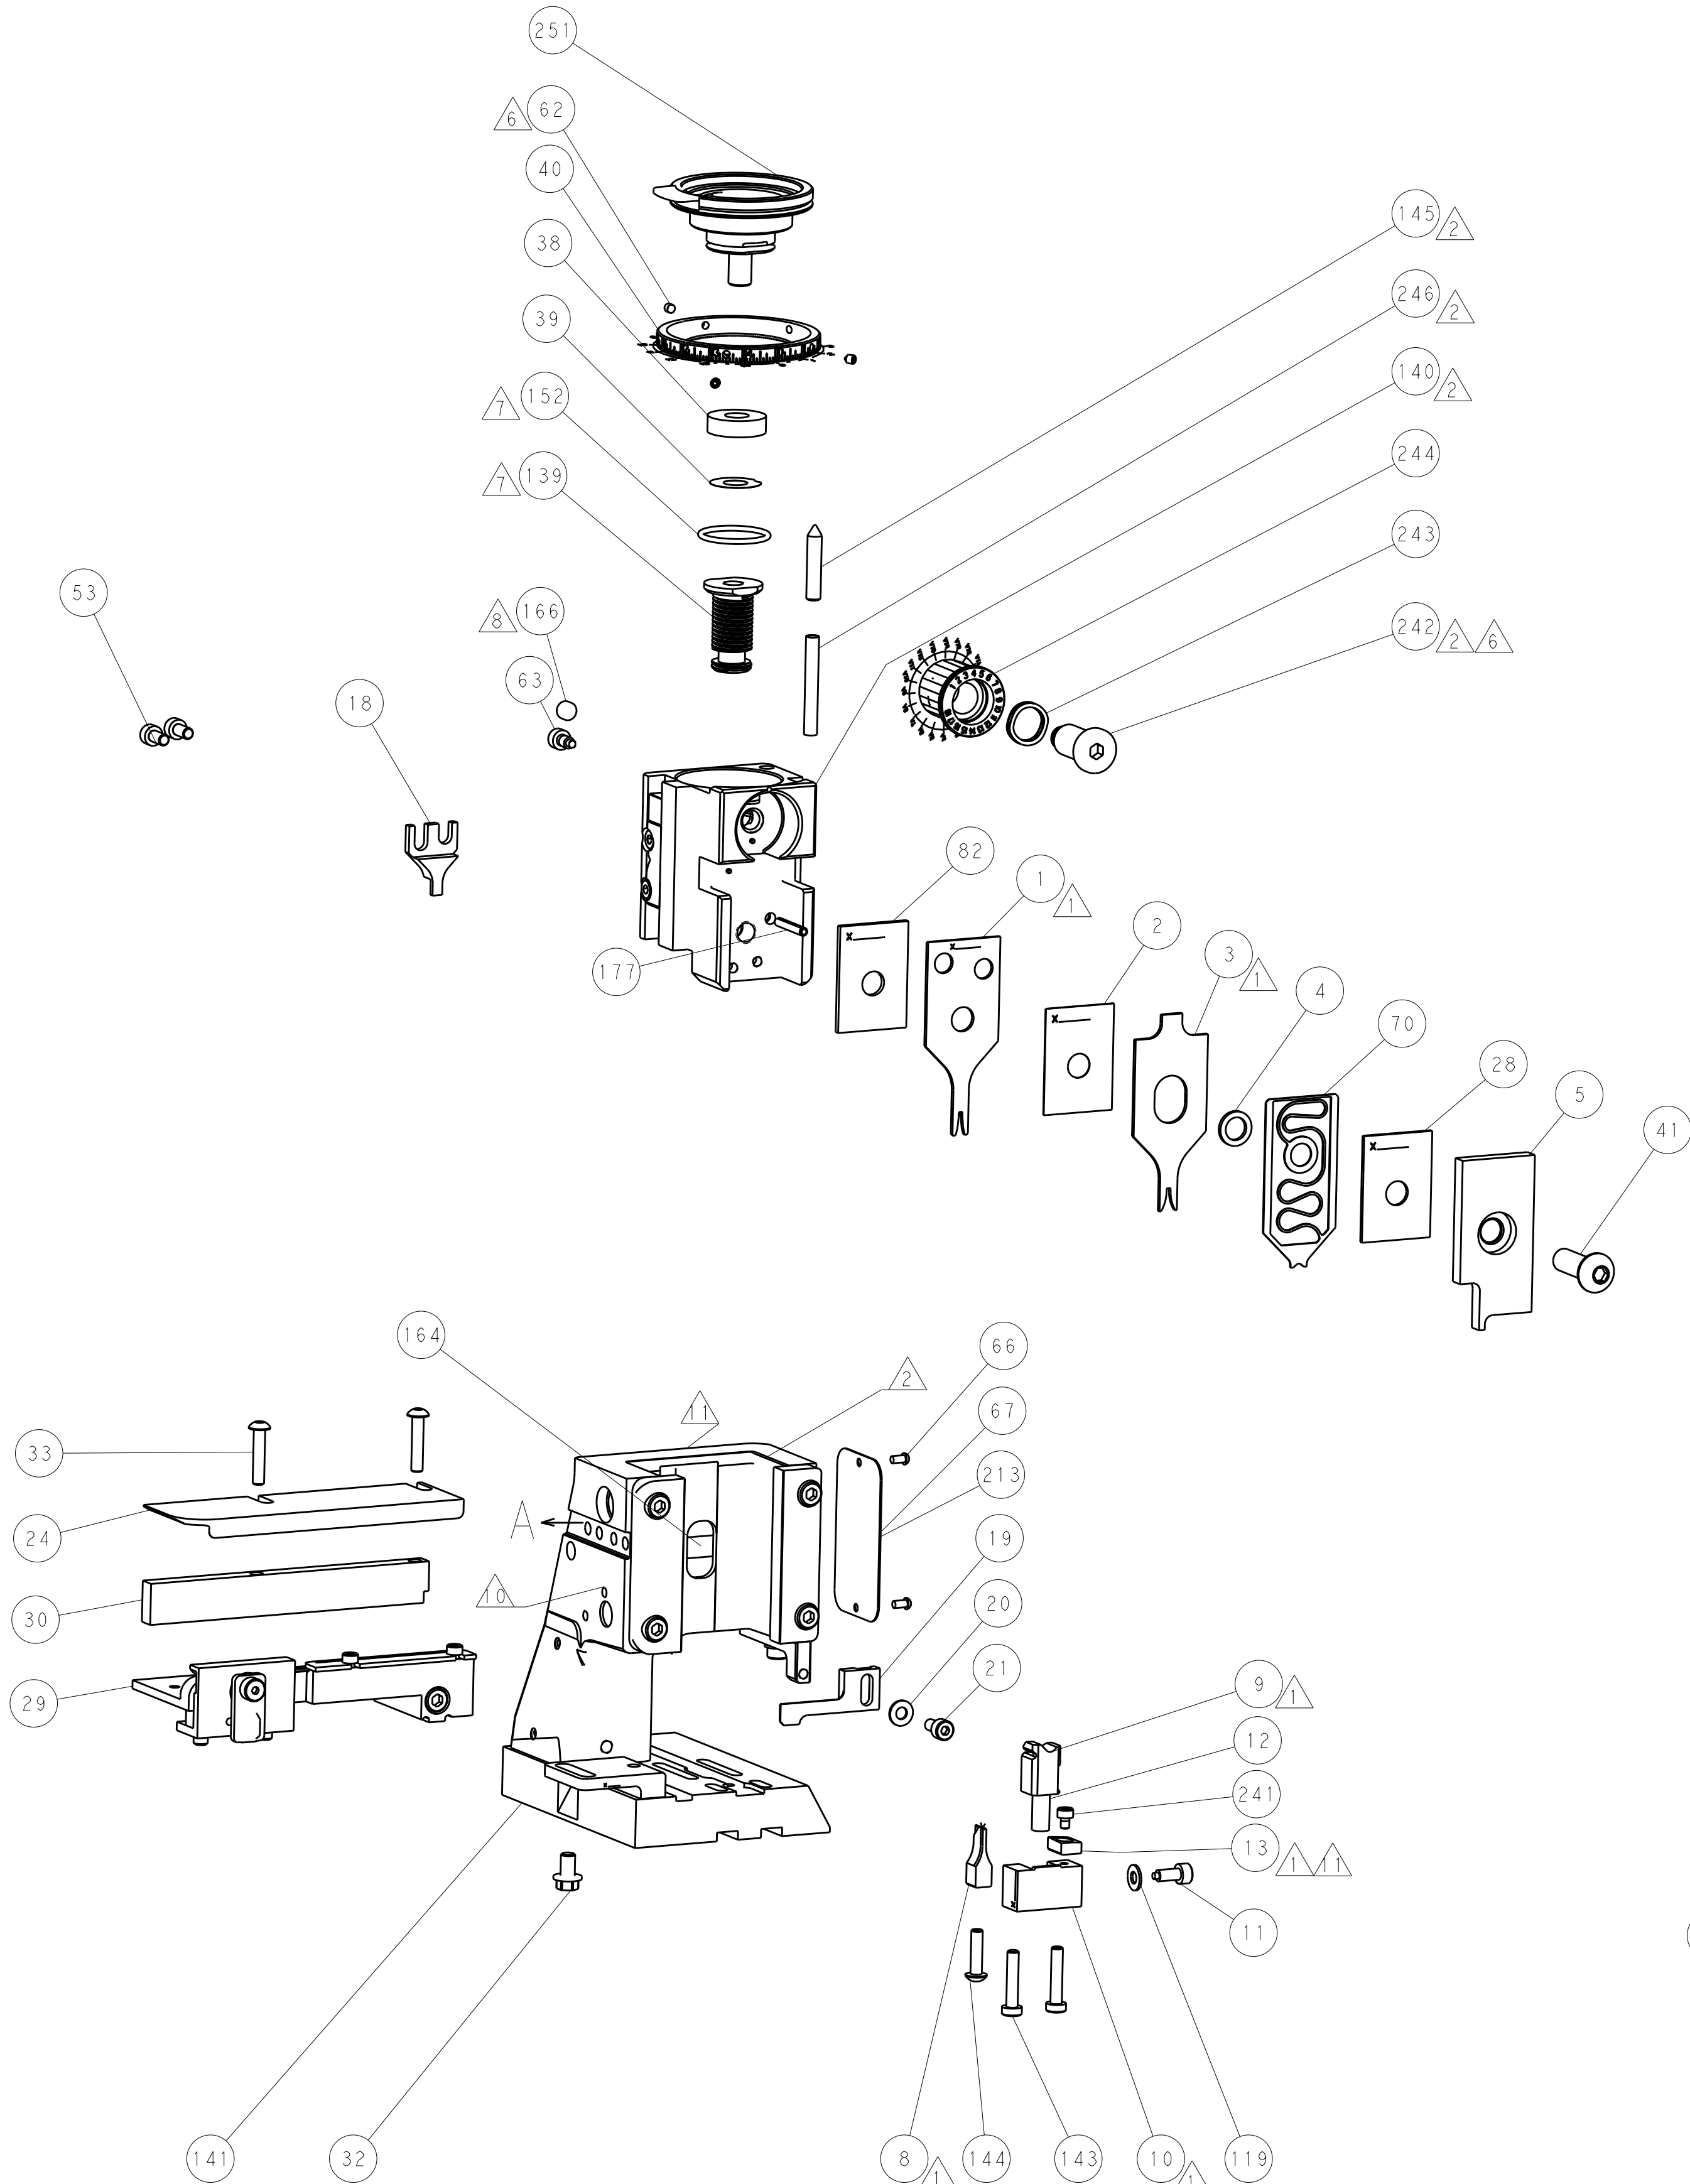

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

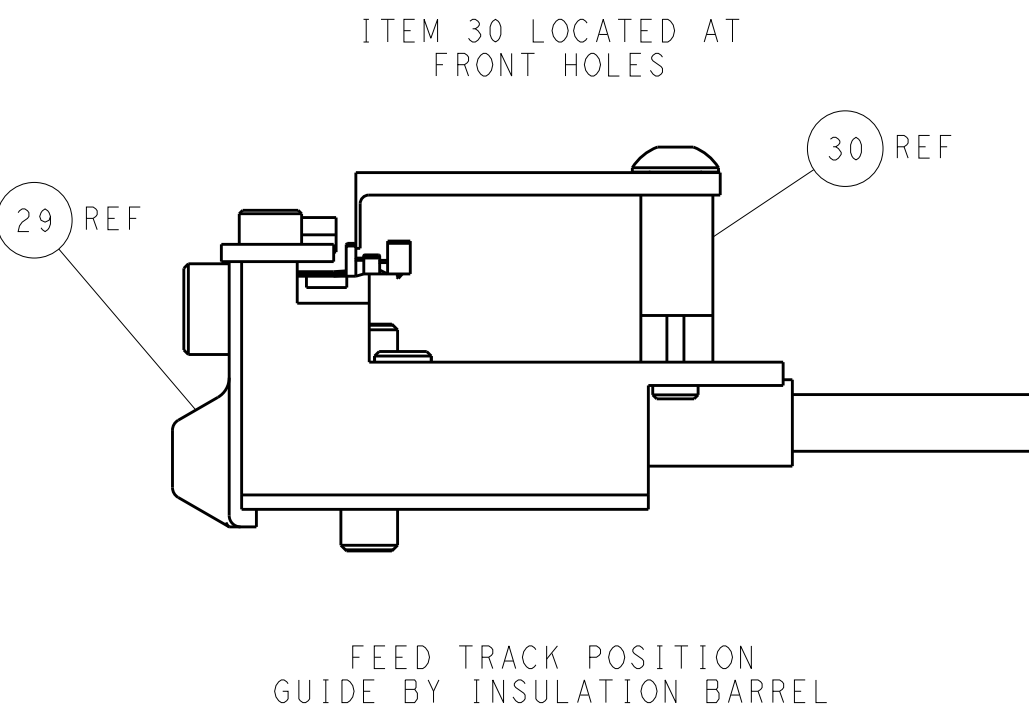

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY CHANGES TO THIS DRAWING SHOULD BE CONTACTED FOR THE LATEST REVISION.		OWN C. CHEN 25MAY2011	TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK S. XI 25MAY2011	NAME Ocean Side Feed Applicator	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. CRUZ 25MAY2011	SIZE A1	
0 PLC ±.5 1 PLC ±.5 2 PLC ±.13 3 PLC ±.013 4 PLC ±.0001		PRODUCT SPEC	CAGE CODE 00779	
ANGLES FINISH		APPLICATION SPEC	DRAWING NO 2151102	
MATERIAL		WEIGHT	RESTRICTED TO Customer Accessible Production Drawing	
		SCALE 1:2	SHEET 4 OF 4	
			REV C	

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION