KR Electronics, Inc.

General Description


KR Electronics part number 3053 is a 162 KHz notch filter. Please consult the factory for other frequencies.

Features

- Notch filter
- 162 KHz Notch Frequency
- 50 Ω
- SMA Connectors

Typical Performance

Overall Response
(10 dB/div)

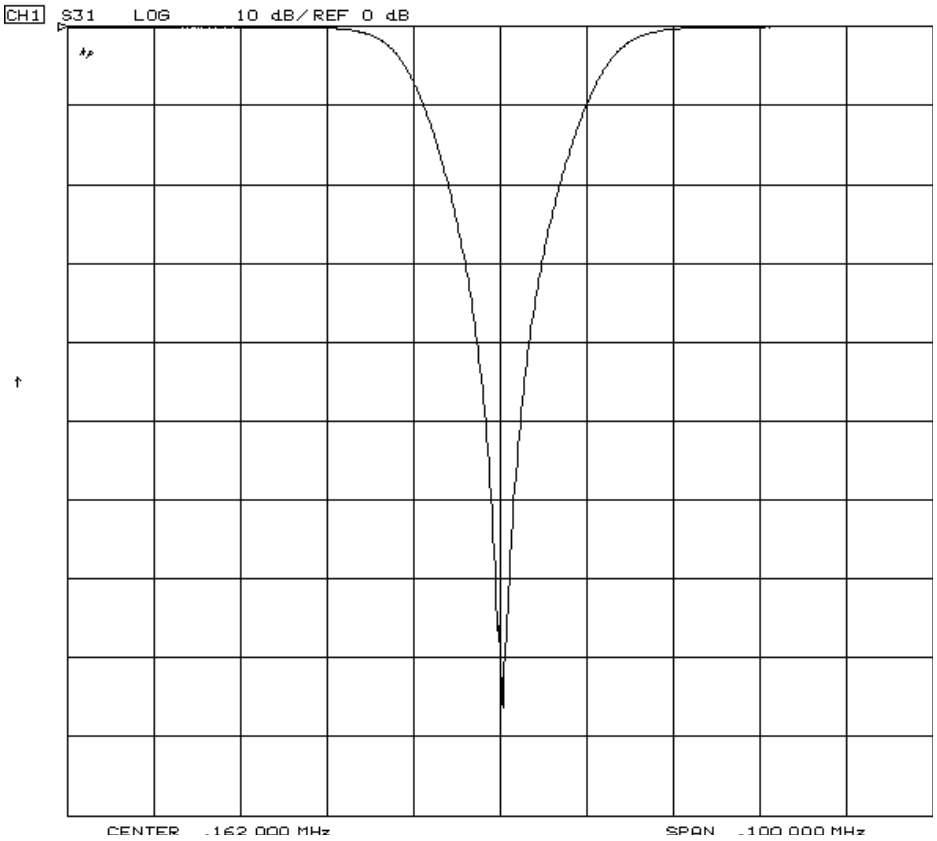

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*


© 2011, KR Electronics, Inc.

KR Electronics 3053


Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency	162 KHz	
3 dB Bandwidth	32.4 KHz max	26 KHz typical
40 dB Bandwidth	3.2 KHz min	5.98 KHz typical
Source and Load	50 Ω	

Physical Dimensions

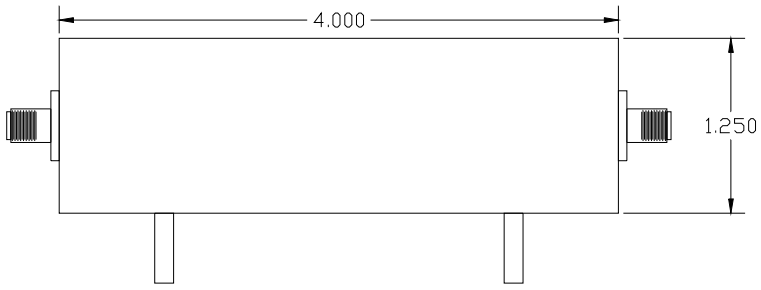

Notes:
1. Dimensions in inches
2. May be supplied in alternate case

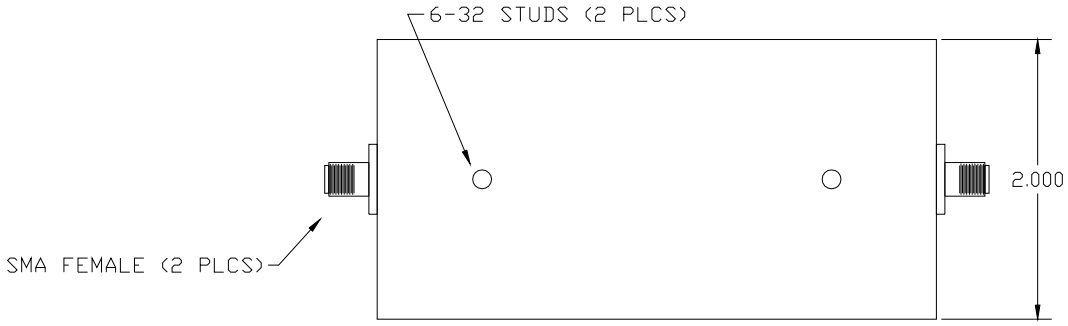

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2011, KR Electronics, Inc.