KR Electronics, Inc.

General Description


KR Electronics part number 3054 is a 252 KHz notch filter. Please consult the factory for other frequencies.

Features

- Notch filter
- 252 KHz Notch Frequency
- 50 Ω
- SMA Connectors

Typical Performance

Overall Response
(10 dB/div)

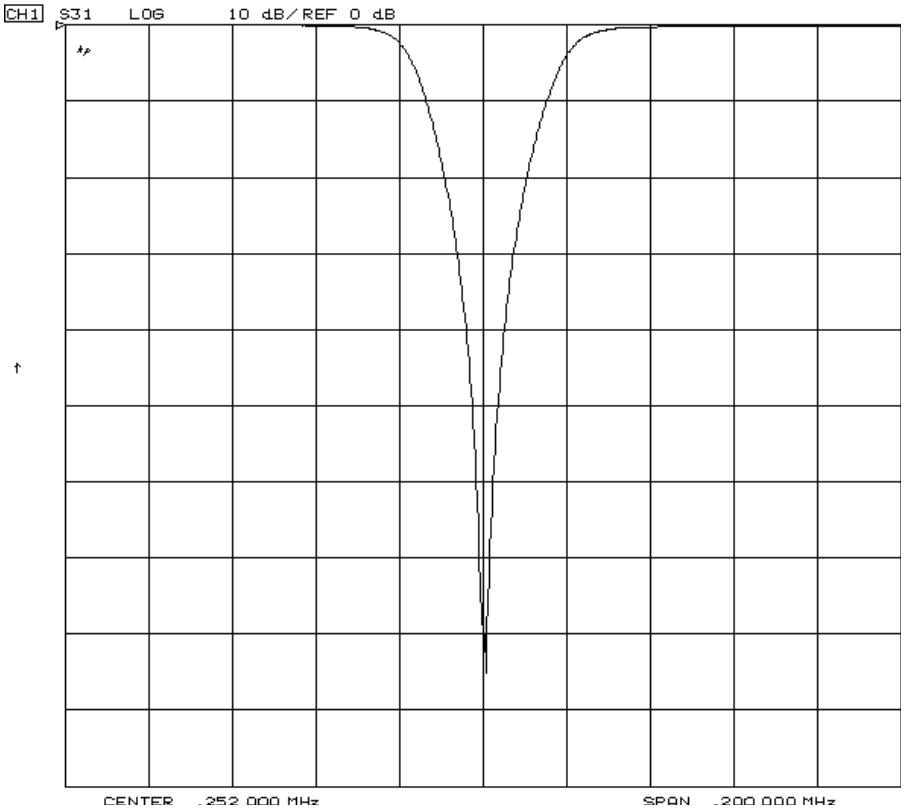

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*


© 2011, KR Electronics, Inc.

KR Electronics 3054


Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency	252 KHz	
3 dB Bandwidth	50.4 KHz max	40.4 KHz typical
40 dB Bandwidth	5 KHz min	9.2 KHz typical
Source and Load	50 Ω	

Physical Dimensions

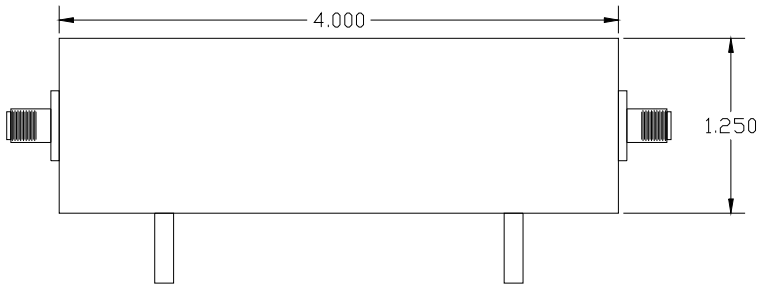

Notes:
1. Dimensions in inches
2. May be supplied in alternate case

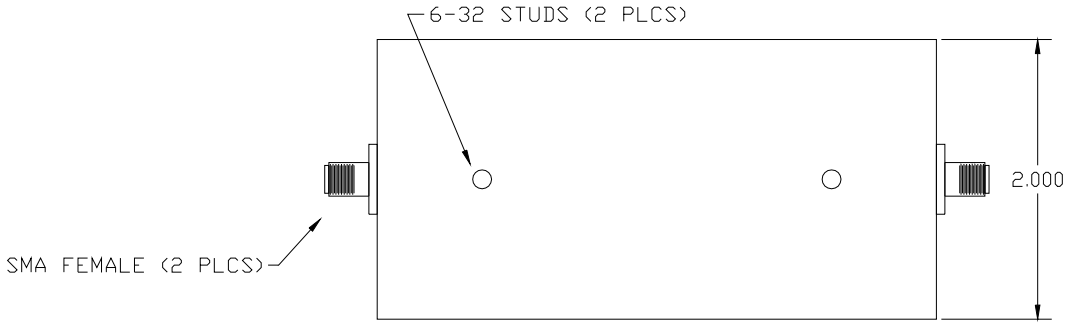

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2011, KR Electronics, Inc.