

General Description


KR Electronics part number 3222-SMA is a 5 MHz constant input impedance notch filter. Other frequencies are available. Please consult the factory.

Features

- 5 MHz Notch Filter
- Constant Input Impedance
- 50 Ω Source and Load
- SMA Connectors
- Surface Mount Available

Typical Performance

Overall Response & Input Return Loss (5 dB/div)

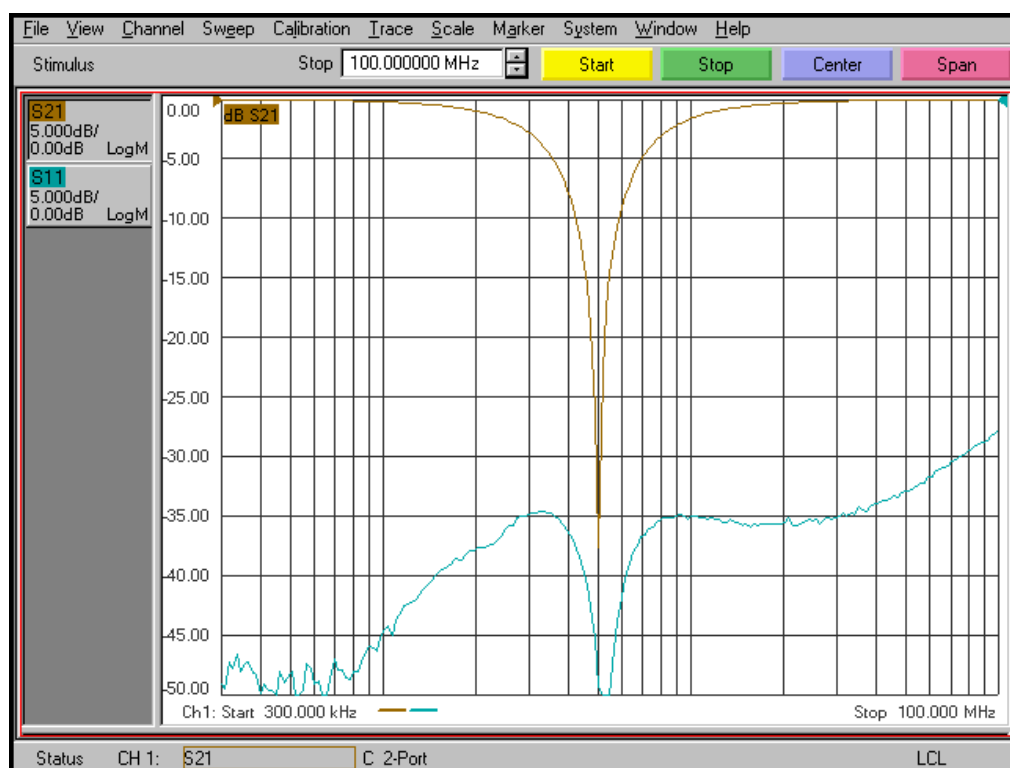


KR Electronics 3222-SMA

Specifications

Parameter	Specification	
Filter type	Notch	
Rejection at 5 MHz	25 dB min	40 dB typical
3 dB Bandwidth	5 MHz typical	
25 dB Bandwidth	265 KHz typical	
Input Return Loss	20 dB min	DC to 100 MHz
Source and Load	50 Ω	

Physical Dimensions

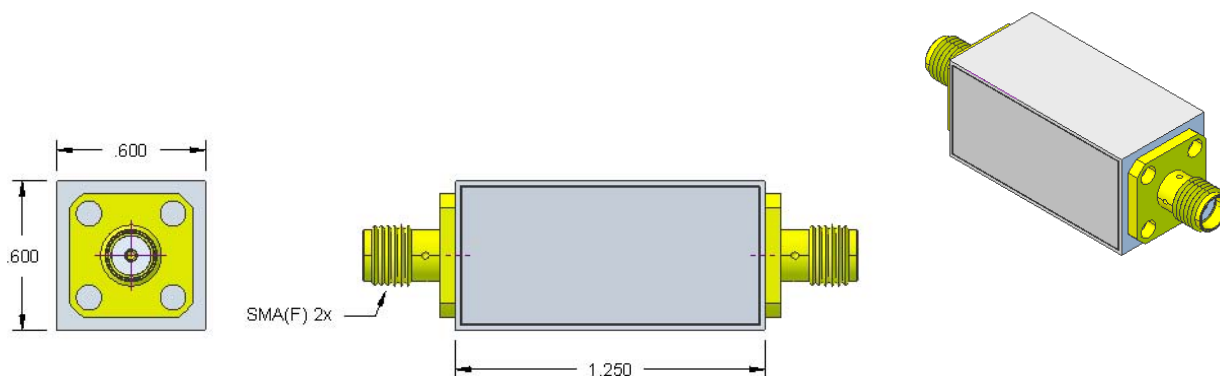

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available with other connectors and in a surface mount package

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982