Fair-Rite Products Corp.
Your Signal Solution®

Pot Cores (5678110821)

Part Number: 5678110821

78 POT CORE SET

Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.

Pot cores can be supplied with the center post gapped to a mechanical dimension or an A_L value.

Catalog Drawing
3D Model

Weight indicated is per pair or set.

Weight: 1.9.000 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	11.1	±0.20	0.437	_
B	3.3	±0.10	0.13	_
C	6.8	±0.25	0.268	_
D	2.3	±0.15	0.091	_
E	9.2	±0.20	0.362	_
F	4.6	±0.10	0.181	_
G	2.2	±0.30	0.087	_

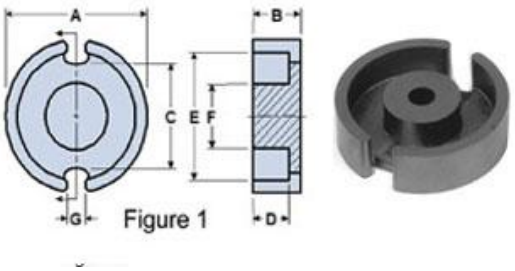


Figure 1

Chart Legend
$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross- Sectional Area, V_e : Effective Core Volume
A_L : Inductance Factor
Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

Electrical Properties	
A_L(nH)	1600 ±25%
Ae(cm^2)	0.173
$\Sigma l/A$(cm^{-1})	9.5
l_e(cm)	1.65
V_e(cm^3)	0.284
A_{min}(cm^2)	0.145

A_L value is measured at 1 kHz, B < 10 gauss.

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair- rite.com • www.fair- rite.com