


Data sheet | Item number: 706-3033/600-300

System cable; for Schneider Modicon TM3; 6 analog inputs or outputs;
Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-3033/600-300

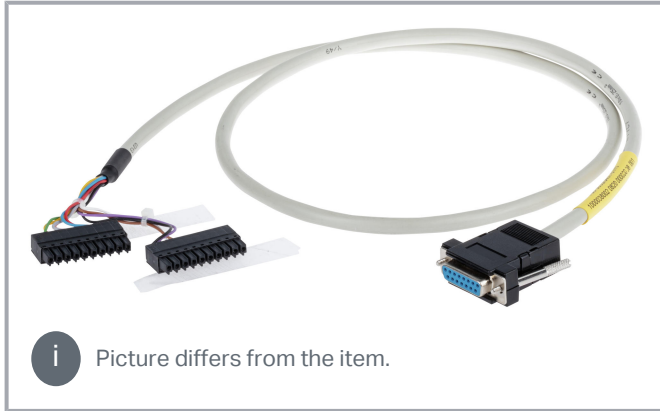

Picture differs from the item.

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	---

Electrical data

Inputs/outputs	6 analog inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Schneider Modicon TM3
Compatible PLC I/O Card Types	TM3 AM6(G)
Connection type (1)	System
Pole number 1	25
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	20
Connector 2	TM3 AM6(G)
Cable type	LiYCY
Wire cross-section	0.25 mm ²

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Color code	per DIN VDE 47100
------------	-------------------

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	410 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
GTIN	4055143257626
Customs tariff number	85444290900

Downloads**Documentation****System Description**

WAGO System Wiring, Selection Guide

pdf
545.9 kB[Download](#)

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

Environmental Product Compliance**Compliance Search**

Environmental Product Compliance 706-3033/600-300

URL

[Download](#)

System cable; for Schneider Modicon TM3; 6 analog inputs or outputs; Length: 3 m;
Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.