


Data sheet | Item number: 706-3140/500-100

System cable; for Schneider Modicon Quantum; 4 analog outputs; Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-3140/500-100

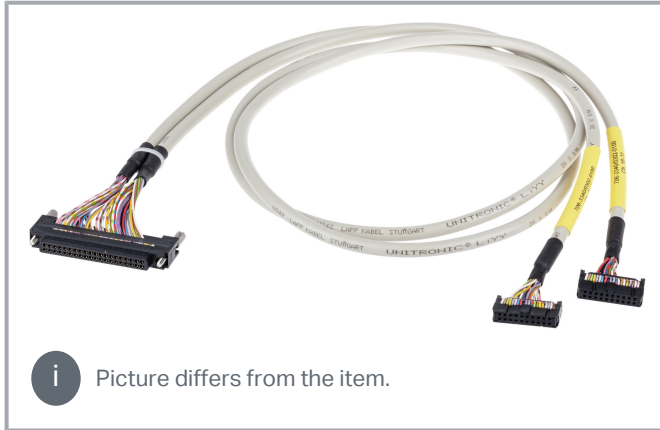

Picture differs from the item.

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	---

Electrical data

Inputs/outputs	4 analog outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Schneider Modicon Quantum
Compatible PLC I/O Card Types	140 ACO 020 00
Connection type (1)	System
Pole number 1	15
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	40
Connector 2	Schneider 140XTS00200
Cable type	LiYCY
Wire cross-section	0.25 mm ²

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Color code

per DIN VDE 47100

Physical data

Cable length

1 m

Material data

Weight

326 g

Environmental requirements

Surrounding air temperature (operation)

-20 ... 50 °C

Commercial data

PU (SPU)

1 Stück

Packaging type

bag

Country of origin

FR

GTIN

4055143980289

Customs tariff number

85444290900

Downloads**Documentation****System Description**

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf

545.9 kB

[Download](#)**Environmental Product Compliance****Compliance Search**

Environmental Product Compliance 706-3140/500-100

URL

[Download](#)

System cable; for Schneider Modicon Quantum; 4 analog outputs; Length: 1 m;
Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.