


Data sheet | Item number: 706-3340/302-200

System cable; for Schneider Modicon M340; 2 x 16 digital inputs or outputs;
Length: 2 m; Conductor cross-section: 0.14 mm²

www.wago.com/706-3340/302-200

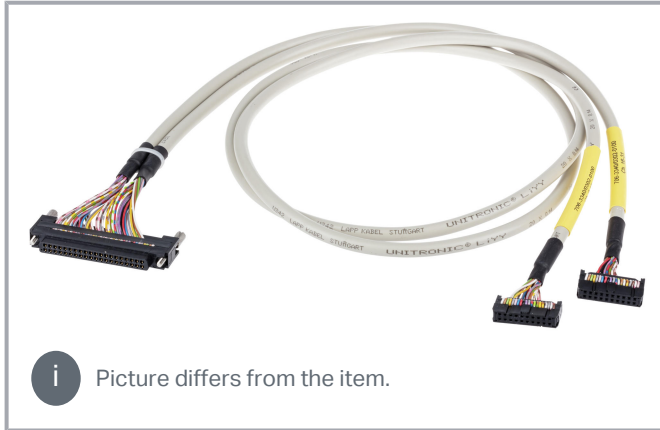

Picture differs from the item.

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Inputs/outputs	2 x 16 digital inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Compatible PLC Modules	Schneider Modicon M340
Compatible PLC I/O Card Types	BMX DDI 3202K BMX DDI 6402K BMX DDM 3202K BMX DDO 3202K BMX DDO 6402K
Connection type (1)	System
Pole number 1	20
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Pole number 2	20
Connector 2	Pluggable connector per DIN 41651; Female connector
Connection type (3)	System
Pole number 3	40
Connector 3	Fujitsu ref FCN-367-J40/ AU/ H
Cable type	LiYY
Wire cross-section	0.14 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	2 m
--------------	-----

Material data

Weight	350 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 ()
PU (SPU)	1 Stück
Country of origin	FR
GTIN	4045454869106
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3340/302-200

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



[URL](#)

[Download](#)

System cable; for Schneider Modicon M340; 2 x 16 digital inputs or outputs; Length:
2 m; Conductor cross-section: 0.14 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.