


Data sheet | Item number: 706-3340/304-300

System cable; for Schneider Modicon M340; 8 digital inputs and 8 digital outputs for higher voltages; Length: 3 m; Conductor cross-section: 0.14 mm²

www.wago.com/706-3340/304-300

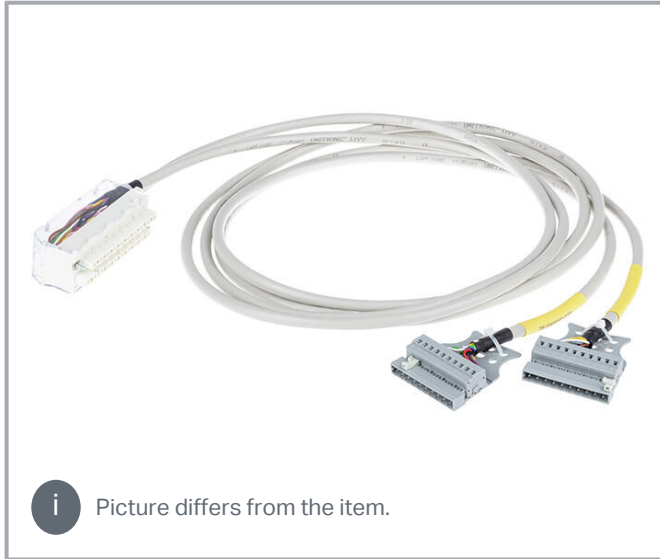

Data Notes

Note	If less than 3 channels used at the same time, the maximum current per wire 2 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L. If more than 3 channels used at the same time, the maximum current per wire 0.75 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L.
------	--

Electrical data

Inputs/outputs	8 digital inputs and 8 digital outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	0.75 A

Connection data

Compatible PLC Modules	Schneider Modicon M340
Compatible PLC I/O Card Types	BMX DDM 16025
Connection type (1)	System
Pole number 1	10

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	10
Connector 2	WAGO 231 Series
Connection type (3)	System
Pole number 3	20
Connector 3	Schneider BMXFTB2020
Cable type	LiYY
Wire cross-section	0.14 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	729 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143980388
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB
[Download](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3340/304-300	URL	Download
System cable; for Schneider Modicon M340; 8 digital inputs and 8 digital outputs for higher voltages; Length: 3 m; Conductor cross-section: 0.14 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.