


Data sheet | Item number: 706-4769/408-100

System cable; for Rockwell Compact Logix; 16 analog inputs; Length: 1 m;
Conductor cross-section: 0.25 mm²

www.wago.com/706-4769/408-100

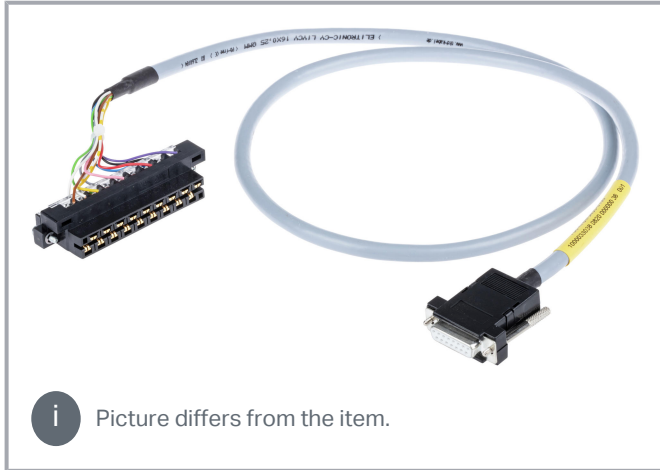

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	---

Electrical data

Inputs/outputs	16 analog inputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Rockwell Compact Logix
Compatible PLC I/O Card Types	1769 - IF16C
Connection type (1)	System
Pole number 1	25
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	25
Connector 2	Sub-Min-D; female connector
Connection type (3)	System

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Pole number 3	18
Connector 3	Rockwell-RTBN18
Cable type	LIYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	444 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143984775
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-4769/408-100	URL	Download
System cable; for Rockwell Compact Logix; 16 analog inputs; Length: 1 m; Conductor cross-section: 0.25 mm ²		

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.