


Dimensions

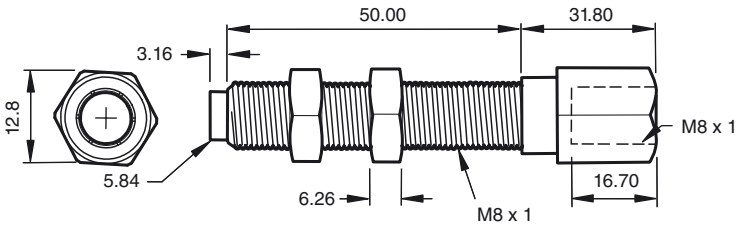

Technical data

Mechanical specifications

Material	Heat-treated alloy steel

Model Number

ES-08-50

Mounting adapter

Features

- End stop adapter
- For 8 mm diameter sensors

Application

The end stop adapter turns a standard 8 mm diameter shielded inductive sensor into a durable mechanical stop switch. These adapters are useful for applications where end-of-travel signals are required. Sensor activation point is dependent upon the insertion depth (0 - 1.5 mm).

Release date: 2011-09-23 20:04 Date of issue: 2011-09-23 904109_eng.xml

Subject to modifications without notice
Copyright Pepperl+Fuchs

Pepperl+Fuchs Group www.pepperl-fuchs.com
USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com
Germany: +49 621 776-4411 fa-info@pepperl-fuchs.com
Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS SENSING YOUR NEEDS