


Data sheet | Item number: 706-2300/502-100

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 1 m;

Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/502-100

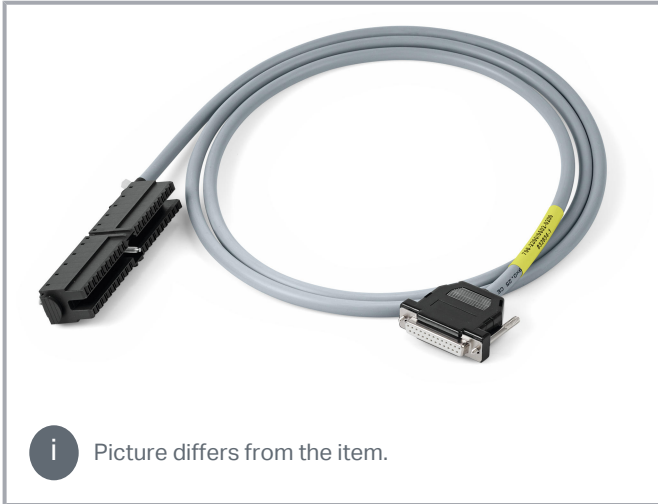

 Picture differs from the item.

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	-------------------------------------------------------------------------------------

Electrical data

Inputs/outputs	8 analog outputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 332-5HF00-0AB0
Connection type (1)	System
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	25
Connector 2	Siemens 6ES7-392-1BJ00-0AA0
Cable type	LiYCY

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	206 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
-----------------------------------------	---------------

Commercial data

Product Group	30 ()
PU (SPU)	1 Stück
Country of origin	FR
GTIN	4045454881849
Customs tariff number	85444290900

Optional accessories

Interface module

Interface module



Item no.: 704-8013

Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier www.wago.com/704-8013

Downloads

Documentation

Bid Text

706-2300/502-100 X81 - Datei	2019. 2. 19.	xml 3.2 kB	Download
706-2300/502-100 doc - Datei	2015. 2. 9.	doc 26.6 kB	Download

Additional Information

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

[Download](#)

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

[Download](#)

CAD/CAE-Data

CAE data

WSCAD Universe 706-2300/502-100

URL

[Download](#)

WSCAD Universe 706-2300/502-100

URL

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/502-100

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 1 m;
Conductor cross-section: 0.25 mm²

URL

[Download](#)

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.