

Keysight N8827A/B


PAM-4 Analysis Software for Infiniium Oscilloscopes

Data Sheet



Introduction

Demand for increased network bandwidth in data centers continues to grow. Several industry groups and standards bodies are using or are actively considering multi-level signaling for such as Pulse Amplitude Modulation (PAM) since it enables higher data rates for a given channel bandwidth compared to common Non-Return-to-Zero (NRZ) signaling. However, the switch from NRZ to PAM-4 creates many new design and measurement challenges.

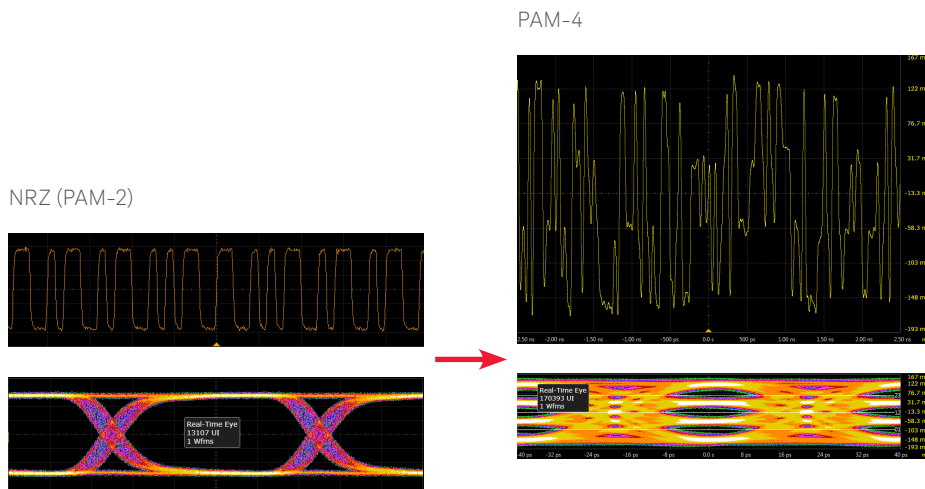


Keysight N8827A/B PAM-4 analysis software for select Infiniium Series real-time oscilloscopes is designed to accurately and quickly characterize electrical PAM-4 designs.



N8827A/B PAM Analysis Features

Comprehensive analysis of Pulse Amplitude Modulation (PAM-4) signals

- Supports 4-level or PAM-4 signaling analysis
- Eye width, eye height, eye skew
- Level amplitude, level noise, level skew
- Linearity measurements and more
- Transition qualified clock recovery
- Bit error ratio (BER) and symbol error ratio (SER) measurements
- BER/SER per acquisition measurements to help identify burst errors
- Unfolding of PAM-4 eye to show waveform location of BER/SER errors found

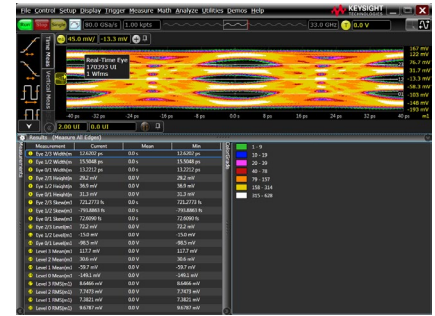

Flexible, economical

- PAM measurements are supported by all V-Series, Z-Series, 90000A Series, 90000 X-Series, and S-Series oscilloscopes
- PAM features are integrated directly into the Infiniium user interface (not a separate application)
- Offline analysis available on a PC using N8900A Infiniium Offline oscilloscope analysis software plus the N8827A/B PAM analysis software

Powerful advanced analysis features

- PAM-4 equalizers are available (CTLE, FFE/LFE) using the N5461A Infiniium Serial Data Equalization software
- Embedding / de-embedding of channels using N5465A InfiniSim Waveform Transformation Toolset for Infiniium Oscilloscopes
- Jitter and amplitude analysis on IEEE JP03 patterns using the N5400A EZJIT Plus Jitter Analysis Software




Easy Measurement Setup

The Keysight N8827A/B PAM analysis software extends the ease-of-use advantages of the Infiniium oscilloscopes to the analysis of PAM-4 signals. A wizard walks you quickly through the steps required to setup measurements for a PAM encoded signal and to select methods for clock recovery and then the measurements you wish to have performed on your PAM-4 signal.

Leveraging the E2688A High-Speed Serial Data Analysis software, the N8827A/B is able to accurately set the individual threshold levels of your PAM-4 signal and render each individual eye.

PAM-4 specific clock recovery

You can choose different, software based clock methods that include first and second order phase-locked loop or constant frequency clock recovery. In addition, if you have a reference clock available, you can route that clock signal to an unused scope channel that you configure as an explicit reference clock for your PAM-4 signal. Transition qualified clock recovery delivers flexible transition-specific reference levels for patterns with low uniform density.

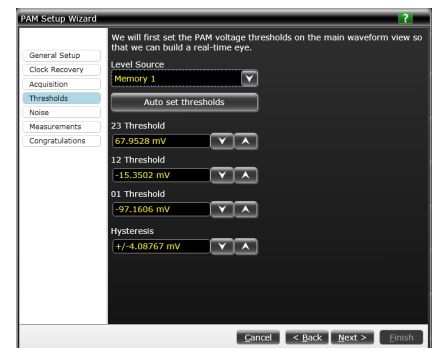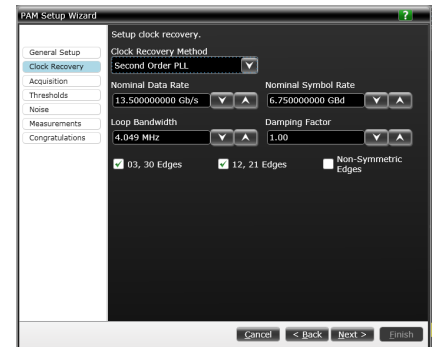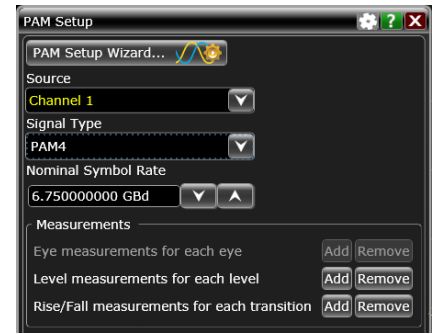

Perform comprehensive analysis of Pulse Amplitude Modulation (PAM-4) signals using the N8827A/B


Accurate analysis of electrical and optical signals

Keysight's N8827A/B PAM software performs accurate analysis on electrical PAM-4 signals using measurements integrated directly into the Infiniium user interface (no external application is required). Communication links using PAM typically operate at much higher Symbol Error Rate (SER) than traditional NRZ links, so the N8827A/B analysis algorithms have been engineered to provide robust measurements on real world waveforms including those from severely degraded signals.

Eye diagram analysis

Analyze eye diagrams using built-in measurements:

- Eye-centric measurements:
 - Level - Skew
 - Eye height - Eye width
- Level-centric measurements:
 - Mean level (voltage or power)
 - Thickness (rms and p-p)
 - Skew

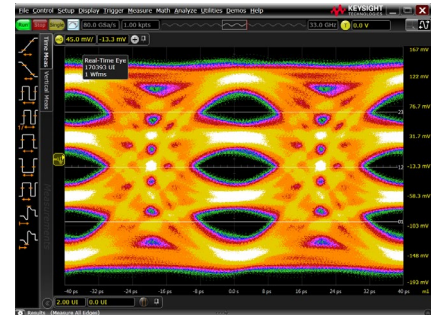

Waveform analysis

Analyze pattern waveforms including linearity and PRBS patterns.


- Level measurements - Noise measurements
- Linearity

Measurement	Current	Mean	Min
Eye 2/3 Width(m)	12.6202 ps	0.0 s	12.6202 ps
Eye 1/2 Width(m)	15.5048 ps	0.0 s	15.5048 ps
Eye 0/1 Width(m)	13.2212 ps	0.0 s	13.2212 ps
Eye 2/3 Height(n)	29.2 mV	0.0 V	29.2 mV
Eye 1/2 Height(n)	36.9 mV	0.0 V	36.9 mV
Eye 0/1 Height(n)	31.3 mV	0.0 V	31.3 mV
Eye 1/2 Skew(m)	721.2773 fs	0.0 s	721.2773 fs
Eye 2/3 Skew(m)	-793.8863 fs	0.0 s	-793.8863 fs
Eye 0/1 Skew(m)	72.6090 fs	0.0 s	72.6090 fs
Eye 2/3 Level(m)	72.2 mV	0.0 V	72.2 mV
Eye 1/2 Level(m)	-15.0 mV	0.0 V	-15.0 mV
Eye 0/1 Level(m)	-98.5 mV	0.0 V	-98.5 mV
Level 3 Mean(m)	117.7 mV	0.0 V	117.7 mV
Level 2 Mean(m)	30.6 mV	0.0 V	30.6 mV
Level 1 Mean(m)	-59.7 mV	0.0 V	-59.7 mV
Level 0 Mean(m)	-149.1 mV	0.0 V	-149.1 mV
Level 3 RMS(m)	8.6466 mV	0.0 V	8.6466 mV
Level 2 RMS(m)	7.7473 mV	0.0 V	7.7473 mV
Level 1 RMS(m)	7.3821 mV	0.0 V	7.3821 mV
Level 0 RMS(m)	9.6787 mV	0.0 V	9.6787 mV

Bit error ratio (BER) and symbol error ratio (SER) measurements

Since PAM-4 often uses forward error correction (FEC), it is now possible to use an oscilloscope to perform BER and SER testing. Use the BER/SER measurements to determine error count and to show waveform location of errors for repeating patterns (such as PRBS⁷ 1).

- BER/SER cumulative measures statistical BER level
- BER/SER per acquisition helps to identify and locate burst errors
- PAM-4 eye unfolding shows location of BER/SER errors in your actual PAM-4 waveform

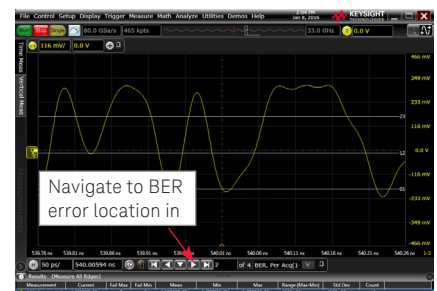

1. BER/SER capability requires at least two error free copies of an identical repeating bit pattern in your scope acquisition memory in order to calculate BER/SER.

Oscilloscope compatibility

Oscilloscopes	Software
S-Series	5.6 or higher
V-Series	5.6 or higher
90000A Series	5.6 or higher
90000 X-Series	5.6 or higher
90000 Q-Series	5.6 or higher
Z-Series	5.6 or higher

Ordering Instructions


PAM analysis software is available as an option when you order your new V-Series or Z-Series oscilloscope or as a standalone license that is assigned by the user to a single Infiniium oscilloscope, or it may be ordered as a transportable license (-1TP) that can be moved by the user from one instrument (or PC) to another.

To purchase the N8827A/B PAM analysis software with a new Infiniium oscilloscope please order the option indicated in the table.

License type			V-Series	Z-Series	S-Series	90000 X-Series	90000 Q-Series	90000A Series	Infiniium Offline
PAM-4 analysis software	Fixed	Factory-installed	N8827A-1FP	N8827A-1FP	N8827B-1FP				
		User-installed	N8827A-1FP	N8827A-1FP	N8827B-1FP	N8827A-1FP	N8827A-1FP	N8827A-1FP	
	Floating	Transportable	N8827A-1TP	N8827A-1TP	N8827B-1TP	N8827A-1TP	N8827A-1TP	N8827A-1TP	N8900-006
		Server-based	N5435A-077	N5435A-077					N8900-006

To add the N8827A/B PAM analysis software to an existing Infiniium oscilloscope please order the following:

Model number	Description
N8827B-1FP	Fixed perpetual PAM-4 software for Infiniium S-Series oscilloscopes
N8827A-1FP	Fixed perpetual PAM-4 software for Infiniium V-Series, Z-Series, 90000 Q-Series, 90000 X-Series, or 90000A Series oscilloscopes

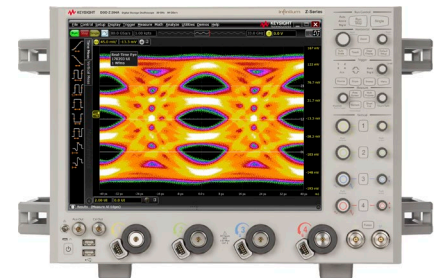

For PC's running the Keysight N8900A Infiniium offline application:

- N8827B-1TP

PAM-N analysis software, transportable perpetual license (move Option 1TP between any computers/PCs).

The N8827A/B requires that the E2688A serial data analysis or N5384A serial data analysis package also be licensed on the platform.

The N8900-006 requires that the N8900-002 also be licensed.

For more information, visit www.keysight.com/find/N8827A or www.keysight.com/find/N8827B





www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.




www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**

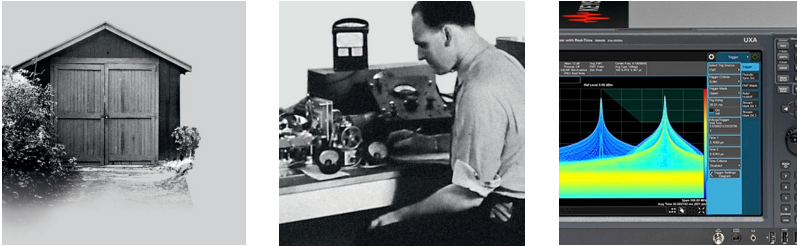

1939

THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-02-10-16)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

This information is subject to change without notice.
 © Keysight Technologies, 2015 - 2016
 Published in USA, February 17, 2016
 5992-0552EN
www.keysight.com

myKeysight

myKeysight

www.keysight.com/find/mykeysight
 A personalized view into the information most relevant to you.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty
 Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans
 Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

Keysight Infoline

www.keysight.com/find/service
 Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners
 Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.