


Data sheet | Item number: 706-3340/201-100

System cable; for Schneider Modicon M340; 16 digital outputs for higher voltages, version 1; Length: 1 m; Conductor cross-section: 0.34 mm²



www.wago.com/706-3340/201-100

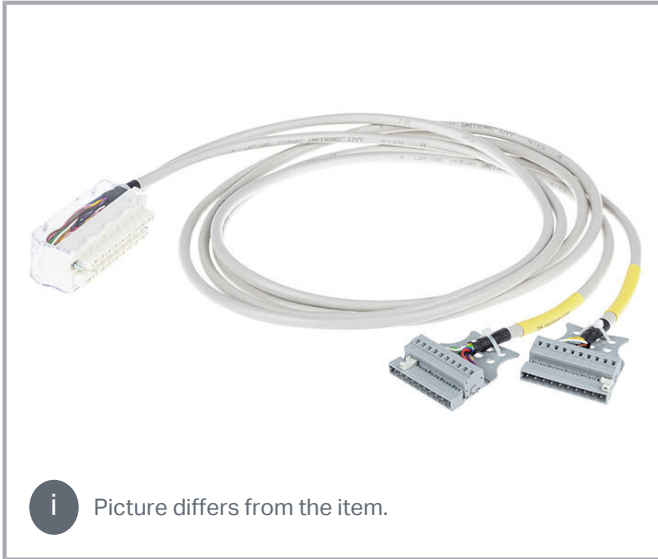

Data

Notes

Note	If less than 3 channels used at the same time, the maximum current per wire 2 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L. If more than 3 channels used at the same time, the maximum current per wire 0.75 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L.
------	--

Electrical data

Inputs/outputs	16 digital outputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Connection data

Compatible PLC Modules	Schneider Modicon M340
Compatible PLC I/O Card Types	BMX DRA 1605
Connection type (1)	System
Pole number 1	10

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Pluggable connectors	WAGO 231 Series
Connection type 2	System
Pole number 2	10
Connector 2	WAGO 231 Series
Connection type (3)	System
Connector 3	Schneider BMXFTB2020
Cable type	LiYY
Wire cross-section	0.34 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	329 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143980296
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

[Download](#)

Environmental Product Compliance

Compliance Search

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-3340/201-100

www.wago.com/706-3340/201-100



[URL](#)

[Download](#)

Environmental Product Compliance 706-3340/201-100

System cable; for Schneider Modicon M340; 16 digital outputs for higher voltages, version 1; Length: 1 m; Conductor cross-section: 0.34 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.