

# KR Electronics 2521-3 Bandpass

## General Description


KR 2521-3 is an 80 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 16 MHz and is designed for 50  $\Omega$  source and load impedance. Other center frequencies and bandwidths are available. Please consult the factory.

## Features


- 80 MHz Bandpass
- 50  $\Omega$
- SMA Connectors

## Typical Performance

**Passband Amplitude**  
(1 dB/div)

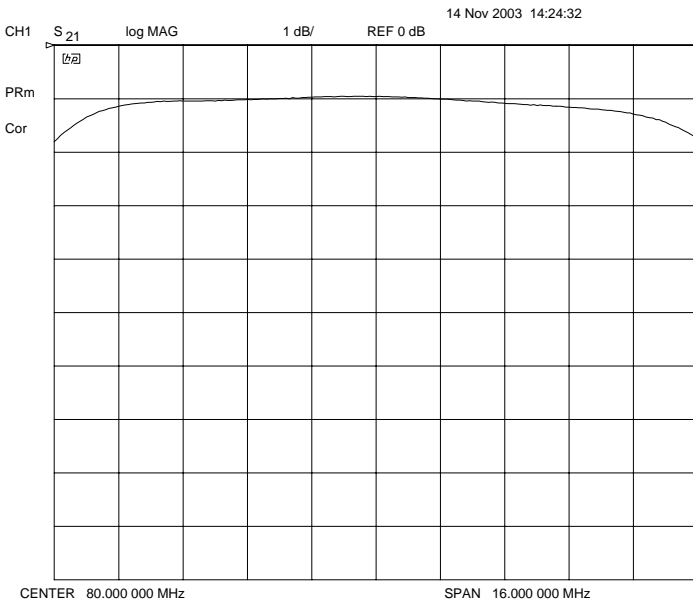

**Overall Response**  
(5 dB/div)

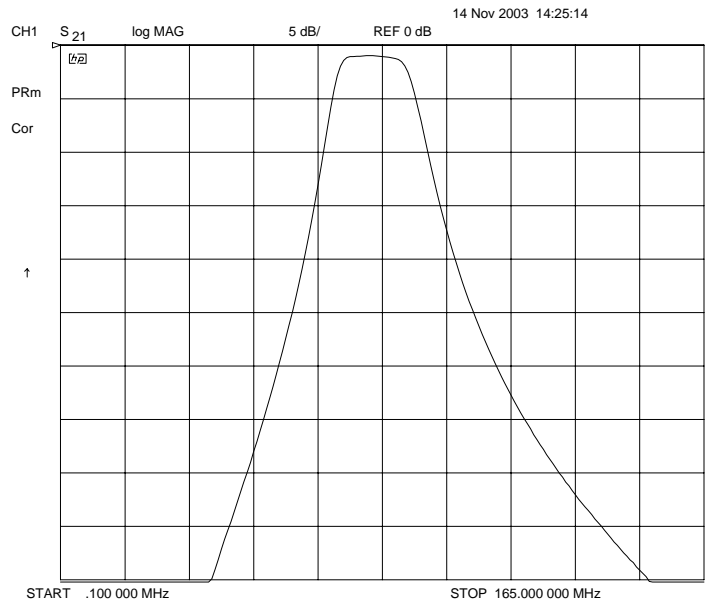


# KR Electronics 2521-3

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	80 MHz
Insertion Loss	< 3 dB ( 1 dB Typ)
3 dB Bandwidth	16 MHz min
Source & Load	50 Ω

## Physical Dimensions

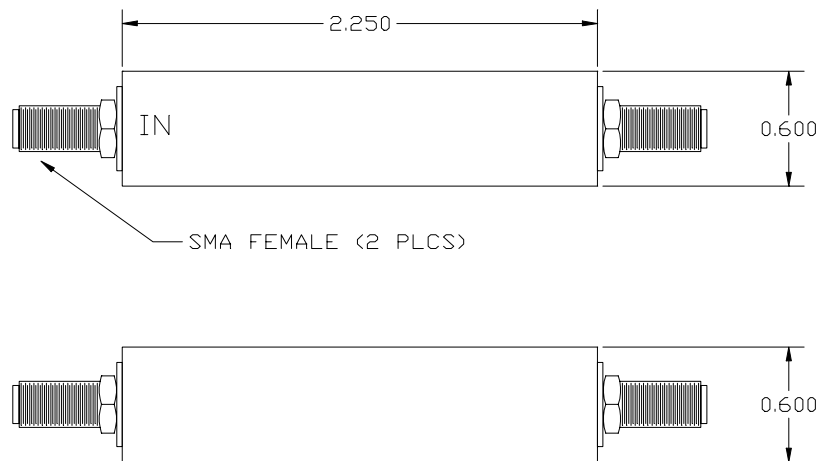

TOLERANCE UNLESS SPECIFIED ±0.010"